



## 24-Outlet Vertical Power Strip, 120V, 20A, L5-20P, 15 ft. (4.57 m) Cord, 72 in.

MODEL NUMBER: **PS7224-20T**

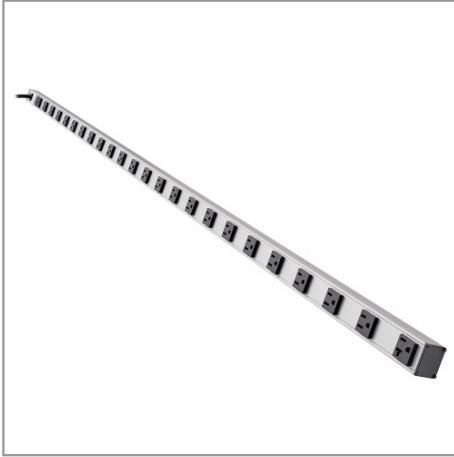

### Highlights

- 24 outlets
- Convenient and safe covered, on/off switch
- 20-amp circuit breaker
- 15-ft. (4.57 m) cord with locking L5-20 input plug
- 72" length

### Package Includes

- PS7224-20T
- Mounting hardware
- Instruction manual

### Description

Tripp Lite's PS7224-20T power strip offers 20 amp, 120V multi-outlet AC power distribution in a convenient 72 inch mountable housing with NEMA L5-20 locking input plug. Offers horizontal or vertical power distribution in rackmount, raceway and workbench applications. Includes 24 output receptacles with 2.795 inch center-to-center spacing, 15-ft. (4.57 m) AC line cord and lighted power switch with locking transparent cover to prevent accidental shutoff. Sturdy all-metal extruded aluminum housing stands up to demanding network, laboratory or factory environments.

INPUT/OUTPUT: Input: NEMA L5-20P (twist lock)/Output: 22 NEMA 5-15R & 2 NEMA 5-20R

ELECTRICAL: 120V AC, 50/60Hz, 20A

FORMAT: 72 in. corded, mountable power strip

### Features

- Sturdy all-metal 72 inch corded strip format with 2.795 inch center-to-center outlet spacing
- Included mounting hardware supports vertical or horizontal mounting in rack enclosures, raceways and more
- Includes 22 NEMA 5-15R and 2 NEMA 5-20R output receptacles
- Includes NEMA L5-20 twist-lock input plug connection
- Ideal for horizontal or vertical raceway style power distribution in office, workbench, industrial, networking and telecom applications
- Lighted power switch with locking transparent cover prevents accidental shutoff
- 20 amp electrical capacity with circuit breaker
- 120V AC, 50/60Hz electrical compatibility

## Specifications

OVERVIEW	
UPC Code	037332042378

<b>INPUT</b>	
Nominal Input Voltage(s) Supported	120V AC
Recommended Electrical Service	20A 120V
Input Cord Gauge Type	12 gauge; SJT
Voltage Compatibility (VAC)	120
Input Plug Type	NEMA L5-20P
Input Cord Length (ft.)	15
Right-Angle Plug	No
Input Cord Length (m)	4.57
Integrated Cord Clip	No
<b>OUTPUT</b>	
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(2) 5-15/20R; (22) 5-15R
Circuit Breaker (amps)	20
Transformer Accommodation	(12) Yes
Right-Angle Outlets	No
Outlet Spacing	2.795 in.
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Switches	Lighted 2 position switch controls power to all outlets
Locking Switch Cover	Transparent on/off switch cover prevents accidental turn-off
<b>PHYSICAL</b>	
Color	Silver
Material of Construction	Aluminum
Power Cord Color	Black
Form Factors Supported	Supports vertical or horizontal mounting in rack enclosures, raceways and a variety of other applications
Housing Color	Silver
Included Mounting Accessories	Includes mounting clips
Mounting Holes or Slots	No
Outlets Measurement (Center to Center)	2.83 in.
Receptacle Color	Black
Shipping Dimensions (hwd / in.)	3.50 x 2.50 x 76.00
Shipping Dimensions (hwd / cm)	8.89 x 6.35 x 193.04

# TRIPP-LITE

by **EATON**

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States

Shipping Weight (lbs.)	10.00
Shipping Weight (kg)	4.54
Unit Dimensions (hwd / in.)	1.250 x 72.000 x 1.500
Unit Dimensions (hwd / cm)	183 x 3.8 x 3.8
Unit Weight (lbs.)	6.6
Unit Weight (kg)	2.99
Outlet Spacing	2.795 in.
<b>FEATURES &amp; SPECIFICATIONS</b>	
Antimicrobial	No
Built-In Circuit Breaker	Yes
<b>STANDARDS &amp; COMPLIANCE</b>	
Product Certifications	cUL Listed; UL 1363; UL Listed
Product Compliance	RoHS
<b>WARRANTY &amp; SUPPORT</b>	
Product Warranty Period (Worldwide)	Lifetime limited warranty

# TRIPP-LITE

by **EATON**

© 2023 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.