

Gasket Others parts

-

_

STRAIGHT PRESS MOUNT MALE RECEPTACLE FRONT MOUNT - WITH CYLINDRICAL CONTACT

PAGE 1/4	ISSUE 10-1	1-16B	SERIES SMP-MAX	F	PART NUMBER R222M10730
0.9 Slide type 0.96.2 0.96 0.96 0.96 0.96 0.96 0.96 0.96 0.96 0.96 0.96 1.47 0.15 $0.35 \times 30^{\circ}$					
All dime	PA A A	Ma 6.1 Scale	3 6.07		
2	ONENTS		MATERIALS	1	PLATING (µm)
Body Center co Outer con Insulator		BRAS BRAS PTFE			NPGR NPGR

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

-




STRAIGHT PRESS MOUNT MALE RECEPTACLE FRONT MOUNT - WITH CYLINDRICAL CONTACT

PAGE 2/4	ISSUE 10-11-16B	SERIES SMP-MA	x	PART NUMBER R222M10730	
F		Standard 100	PACK. Un Conta		
$\begin{tabular}{ c c c c } \hline \textbf{ELECTRICAL CHARACTERISTICS} \\ \hline \textbf{Impedance} & \textbf{50} & \Omega \\ \hline \textbf{Frequency} & \textbf{0-10} & \textbf{GHz} \\ \hline \textbf{VSWR (max.) / Return Loss (max.)} \\ \hline \hline \hline \textbf{DC-4 GHz} & 4-6 GHz \\ \hline \hline 1.07 / -30 dB & 1.12 / -25 dB \\ \hline \textbf{Insertion loss} & < \textbf{0.03*} & \sqrt{F(GHz) dB} \\ \hline \textbf{RF leakage} & -(& \textbf{NA} & -F(GHz)) dB \\ \hline \textbf{Maxi} & \textbf{Voltage rating} \\ \hline \textbf{Dielectric withstanding voltage} & \textbf{500} & Veff Maxi \\ \hline \textbf{Insulation resistance} & \textbf{5000} & M\Omega \\ \hline \textbf{M}\Omega \\ \hline \textbf{mini} \\ \hline \end{tabular}$				ENVIRONMENTAL Operating temperature -55/+165 °C Hermetic seal NA Atm.cm3 Panel leakage NA	3/s
MECHANICAL CHARACTERISTICS Center contact retention Axial force – Mating End 7 N Axial force – Opposite end 15 N Torque NA N Pull-in-range 0.0000 m Recommended torque NA NA Mating NA NA Panel nut NA NA		7 N mi 15 N mi NA N.cn 0.0000 mm NA N.c NA N.c 100 Cycles mini	ni n mini cm	<section-header><section-header></section-header></section-header>	

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

STRAIGHT PRESS MOUNT MALE RECEPTACLE FRONT MOUNT - WITH CYLINDRICAL CONTACT

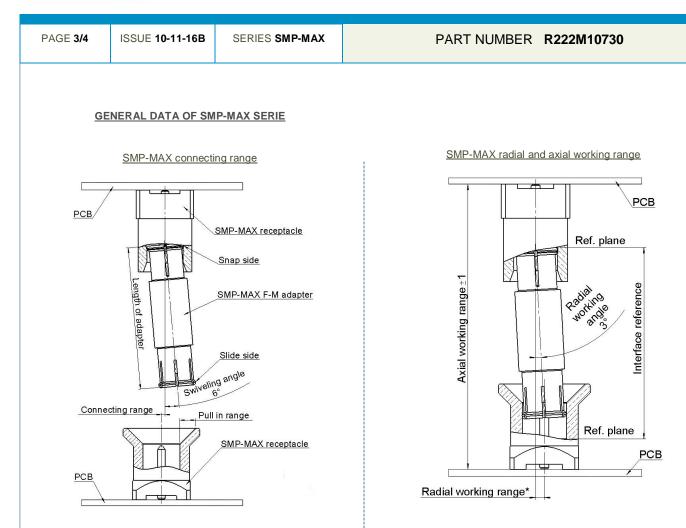

The connecting range represents the maximum misalignment during connection.

Radiall 🚺

The swiveling angle is the maximum possible angle of the adapter in a snap receptacle.

A blind assembly is guaranteed if radial misalignment is smaller than connecting range. Otherwise a manual lead-in is necessary.

Electrical performance is achieved when radial and axial misalignments are within their working ranges. Radial working range = (length of the adapter) x Sinus(radial working angle).

slide receptacle + adapter + snap receptacle (receptacles soldered on boards):				
	Misalignment	DC - 3 GHz	3 - 6 GHz	
	Radial 0 $^\circ$, Axial 0mm	<1.15/-23.9 dB	<1.25/-19.10 dB	
V.S.W.R / Return loss	Radial 0°, Axial +/-1mm	<1.20/-20.8 dB	<1.35/-16.5 dB	
	Radial 3 $^\circ$, Axial 0mm	<1.15/-23.1 dB	<1.25/-19.1 dB	
	Radial 3°, Axial +/-1mm	<1.20/-20.8 dB	<1.35/-16.5 dB	
	Misalignment	DC - 3 GHz	3 - 6 GHz	
	Radial 0 $^\circ$, Axial 0mm	<0.10 dB	<0.15 dB	
Insertion loss	Radial 0 $^\circ$, Axial +/-1mm	<0.12 dB	<0.25 dB	
	Radial 3 $^\circ$, Axial 0mm	<0.10 dB	<0.15 dB	
	Radial 3°, Axial +/-1mm	<0.12 dB	<0.25 dB	
handling power	>300W @2.7GHz at 25°C; >200W @2.7GHz at 85°C			

<u>Typical RF performances for a set:</u> slide receptacle + adapter + snap receptacle (receptacles soldered on boards)

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.



STRAIGHT PRESS MOUNT MALE RECEPTACLE FRONT MOUNT - WITH CYLINDRICAL CONTACT

PAGE 4/4	ISSUE 10-11-16B	SERIES SMP-MAX	PART NUM	IBER R222M10730			
	SOLDER PROCEDURE						
			screen printing application. We re). Verify that the edges of the zon				
3. This pro	cess of soldering has	been tested with convection	oven .Below please find, the typi	cal profile to use.			
4. The clea	4. The cleaning of printed circuit boards is not obliged.						
5. Verificat	tion of solder joints and	d position of the component	by visual inspection				
	TEMPERATURE PROFILE						
	250		Max p tempe 260°C	ature:			
	200						
(C) 150							
5 100							
	50						
		60 120					

Parameter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	Sec

Time (seconds)

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.