



Electrical specifications

Cutoff Frequency (Fc): 160 MHz

Passband: 0-160 MHz

Insertion loss @ Fc: <4dB

Return loss over Passband: >14dB

Ripple in Passband: <0.1dB

Rejection @190MHz: >45dB

Power Handling: 10W

Mechanical

Connector Type: SMA (F)

Dimensions: 2.38 x 1 x 1 inches

Environmental

Operating Temperature: -45 to +85 deg.C


Storage temperature: -65 to +95 deg.C

Shock: 20 G's, 1/2 sine, 11ms

Vibration: 10 G's, 10-2000Hz

Relative Humidity: 0-95%

Outline Drawing:

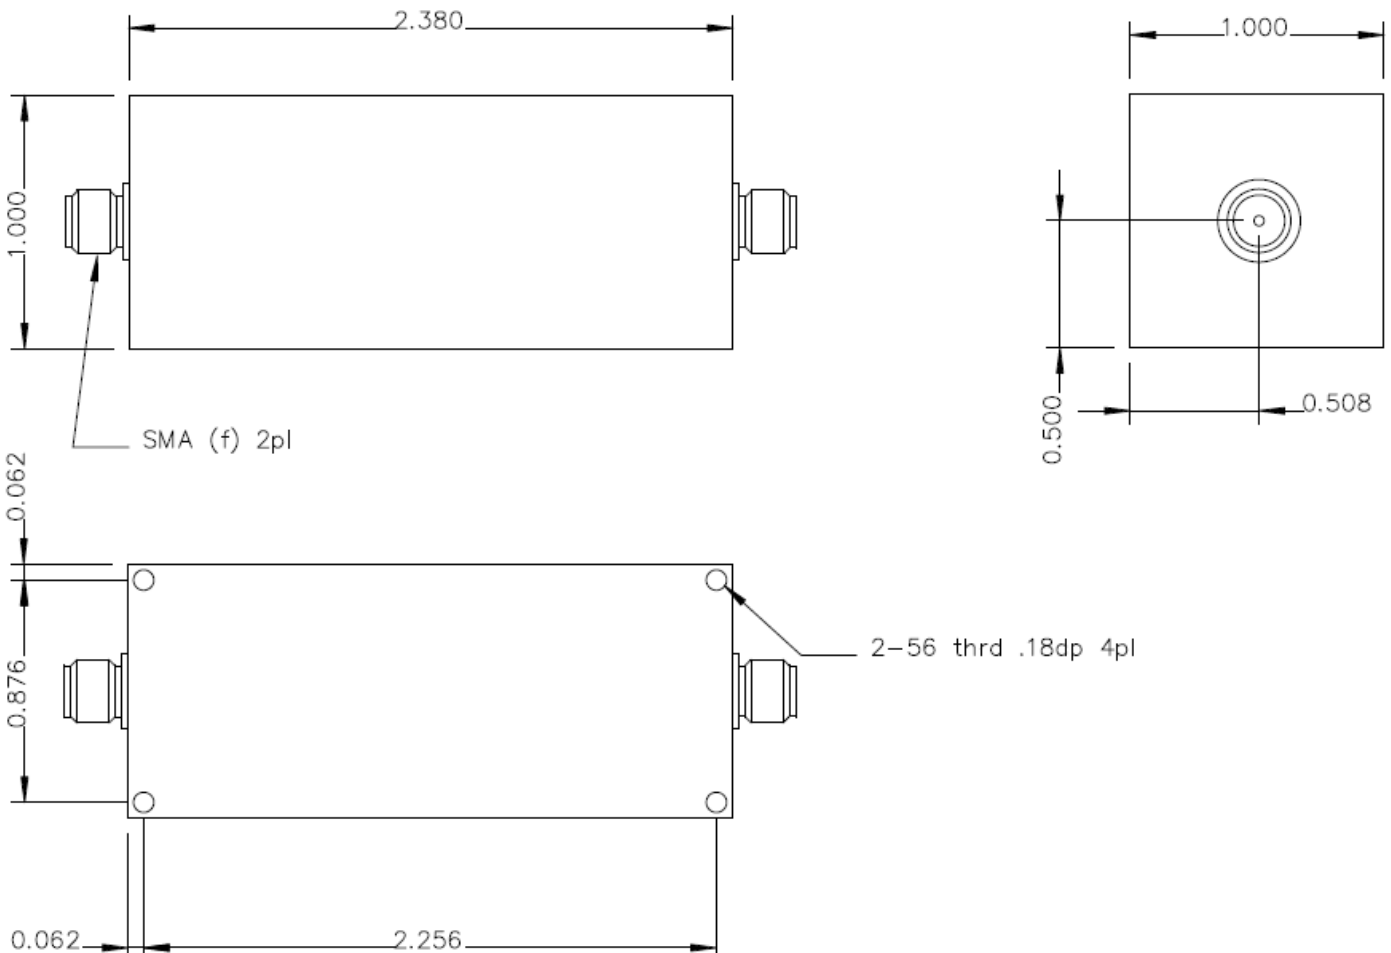



Response Plot:

