NOTES: UNLESS OTHERWISE SPECIFIED

MATERIAL:

INSULATION INSERT:PA66,UL94 V0

SEAL: VITON

HOUSING BODY: ZINC DIE CAST, NICKEL PLATED COUPLING NUT: ZINC DIE CAST, NICKEL PLATED

2. SPECIFICATIONS:

2.1 CURRENT RATING: SIGNAL: 10 AMPS

POWER: 30AMPS

2.2 VOLTAGE RATING: SIGNAL: 250V AC/DC

POWER: 630V AC/DC

2.3 OPERATING TEMPERATURE: -20°C TO +130°C

2.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2

MILLIAMPS CURRENT LEAKAGE @ SIGNAL: 2500VOLTS AC.

POWER: 6000 VOLTS AC.

M23B,PLUG,STR,8POS(4+4),FLANGE,CHECKMATE

MB2GJN0800

АЗ

2.5 DEGREE OF PROTECTION: IP67 (MATED CONDITION)


2.6 DEGREE OF POLLUTION: 3 PER UL840


2.7 OVERVOLTAGE CATEGORY: III PER UL840

2.8 MATING CYCLE DURABILITY: >500 CYCLES

2.9 RoHS COMPLIANT

3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.



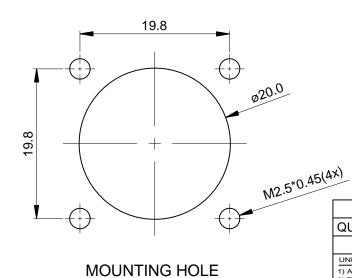

25.7

SEE PART NUMBER CHART PART NUMBER QUANTITY DESCRIPTION ITEM LS LIST


Q0/1111111	174111	CIVIDE	`			
			MA	TI	ERI	AL :
UNLESS OTHERWISE SPECIFIED		SIG	NATURE	≣s	DATE	
All dimensions a Tolerances are a PL DEC +0.30		DRAWN:	Drack		APR.18,2016	
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:				
3) Note reference	= X	ENGINEER:				
MATERIAL SPECIFICA	TIONS:	APPROVAL:				
		CUSTOMER:] ,
PROCESS SPECIFICATIONS:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY, DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.			SIZE	
NEXT ASS'Y:	SCALE:					

Amphenol

Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036

M23B,PLUG,STR,8POS(4+4),FLANGE,CHECKMATE

3	C-	DWG NO:	MB2GJN(0080			A3
N	ONE			SHEET	1	OF	1

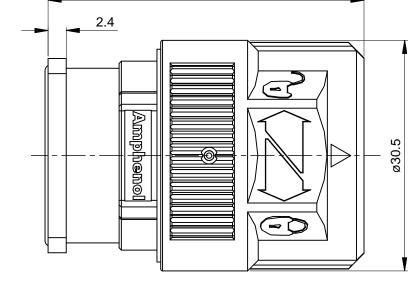

41.8

