



TOP VIEW

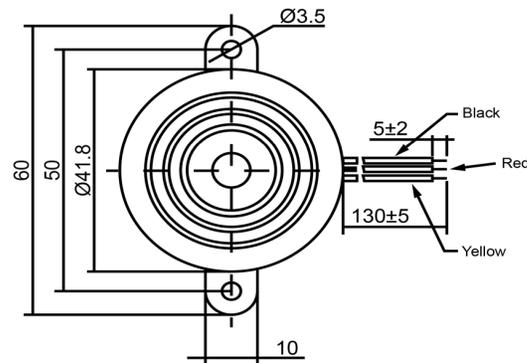

SIDE VIEW

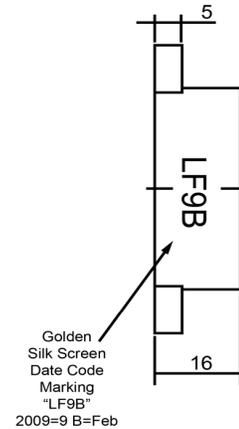

Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description		Date	Approved	
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S	
Resonant Frequency	2,800	(Hz)							
Rated Voltage	12	(V)							
SPL @ 10cm	94	(dBA)							
Mount Type	Flange								
Voltage Range	3 ~ 24	(V)							
Max Rated Current	8	(mA)							
Housing Material	ABS								
Operating Temperature	-20 ~ +60	°C							
Storage Temperature	-30 ~ +70	°C							
Weight	10	(g)							
			 <b>DB UNLIMITED</b>	<b>Piezo Transducer</b>			<b>TP412812-2</b>		
				Drawn by: A.B.    Date: 10/21/2013		Checked by: C.E.    Date: 10/21/2013		Approved by: J.S    Date: 10/21/2013	

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).