


TRS AND TRS WIRING CHART							
JACKET COLOR	H.S. TUBING MARKING	END "A" TRS PLUG			END "B" TRS PLUG		
		RED	BLACK	BARE	RED	BLACK	BARE
BROWN	CHANNEL 1	TIP	RING	SLEEVE	TIP	RING	SLEEVE
RED	CHANNEL 2	TIP	RING	SLEEVE	TIP	RING	SLEEVE
ORANGE	CHANNEL 3	TIP	RING	SLEEVE	TIP	RING	SLEEVE
YELLOW	CHANNEL 4	TIP	RING	SLEEVE	TIP	RING	SLEEVE
GREEN	CHANNEL 5	TIP	RING	SLEEVE	TIP	RING	SLEEVE
BLUE	CHANNEL 6	TIP	RING	SLEEVE	TIP	RING	SLEEVE
PURPLE	CHANNEL 7	TIP	RING	SLEEVE	TIP	RING	SLEEVE
GRAY	CHANNEL 8	TIP	RING	SLEEVE	TIP	RING	SLEEVE

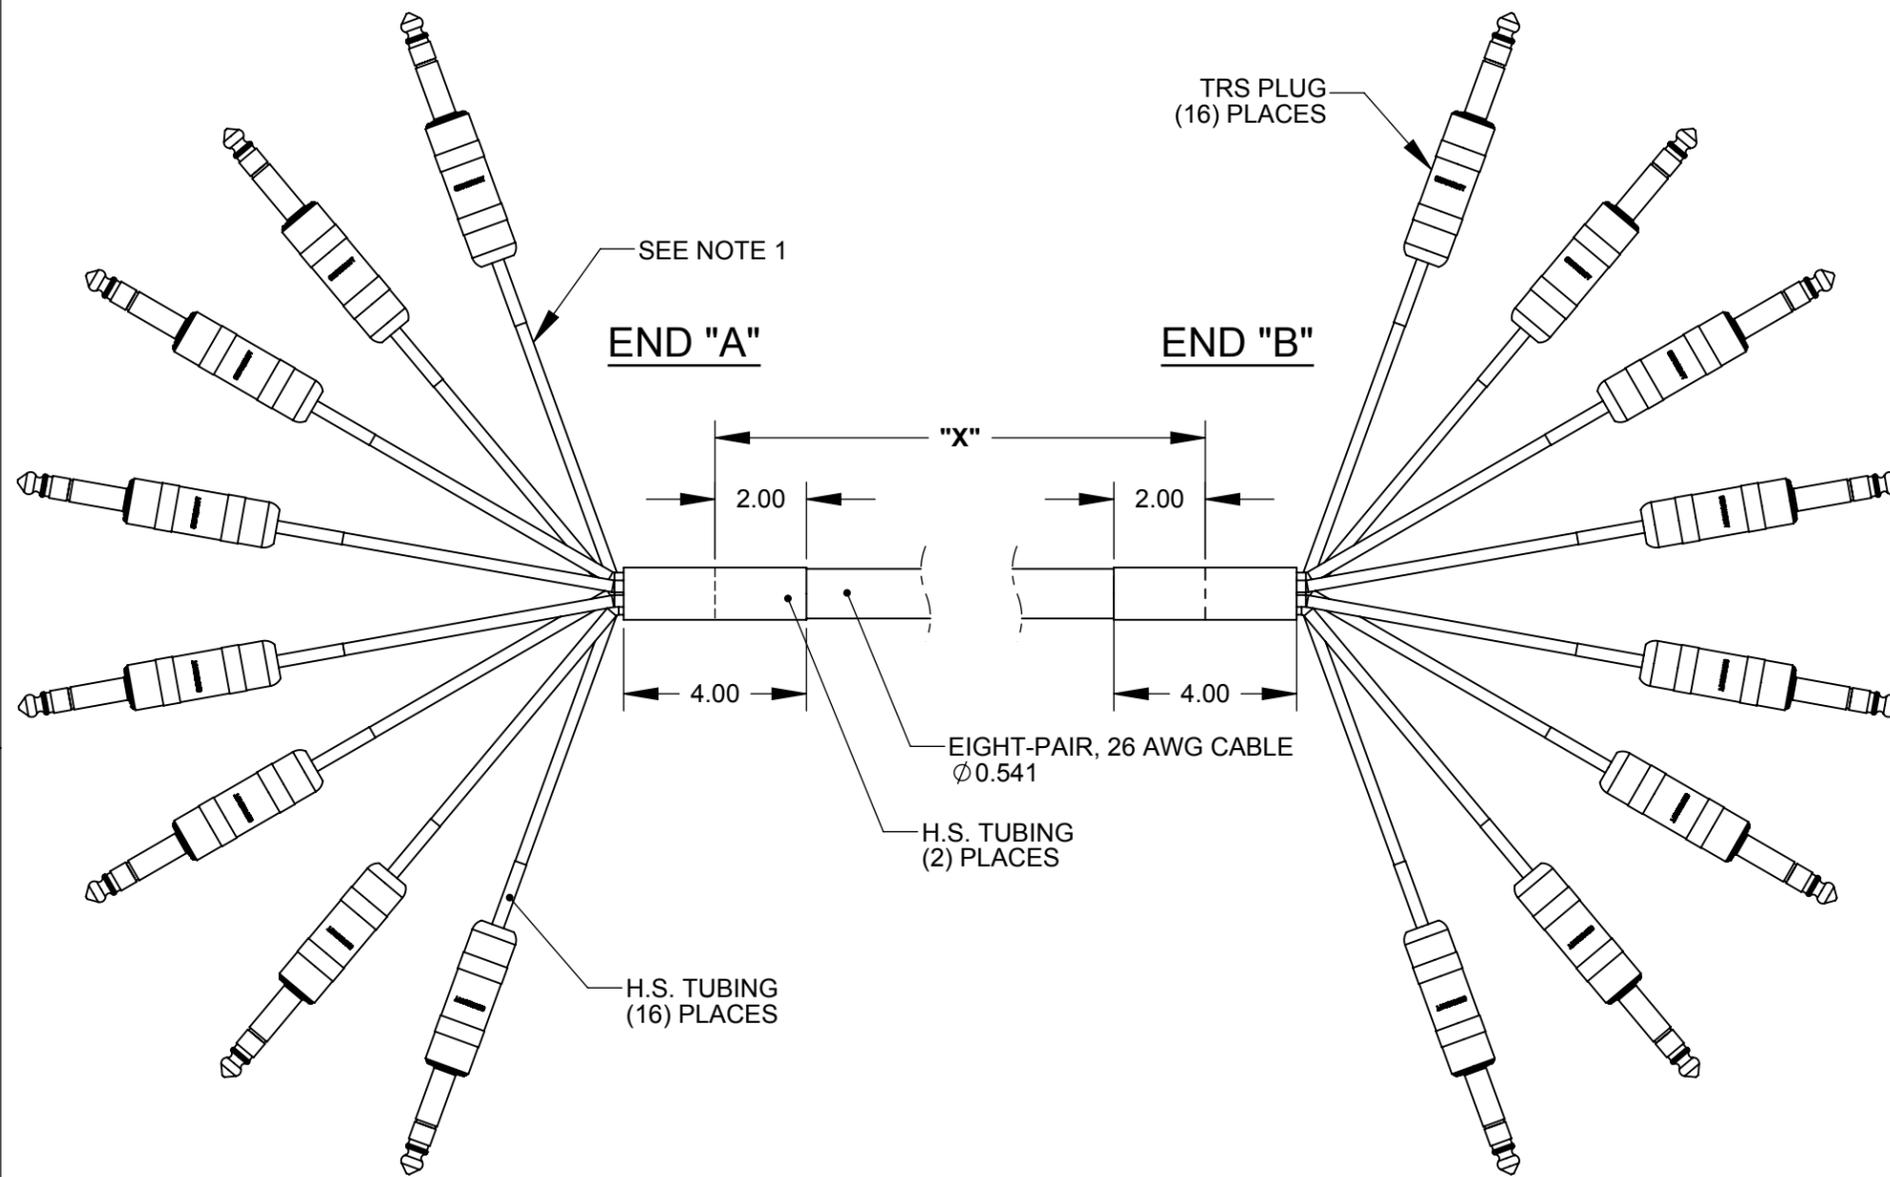

PART NUMBER	CABLE LENGTH "X"
TRS05TRS	5.00 FT +/- 1.50 IN
TRS10TRS	10.00 FT +/- 1.50 IN

CUSTOMER DRAWING

NOTES:

- BREAKOUT CABLE LENGTH IS 18.00 +/- 0.75 IN.
- CABLE IS SHIPPED COILED AND PACKAGED IN A BAG.
- MATERIALS:
CABLE - COPPER, THERMOPLASTIC
TRS PLUG:
INSULATING WASHERS - THERMOPLASTIC
PLUG BODY AND TIP ROD - COPPER ALLOY, NICKEL PLATED
INSULATORS - MYLAR
TERMINALS - COPPER ALLOY, ELECTRO-TINNED
HANDLE - COPPER ALLOY, NICKEL PLATED
- THIS PRODUCT IS RoHS COMPLIANT.

REV	ECO NUMBER	DATE	BY	APVD
B	26637	10/11/10	RS	TJK
A	25983	10/30/08	RS	TJK

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES

- TWO PLACE DECIMALS ±0.02

- THREE PLACE DECIMALS ±0.005

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.							
SIZE	WIDTH	MULT	LBS/M	TEMPER			
FINISH SPEC No.				MATERIAL SPEC No.			
FIRST USED ON			SCALE 1:2				
DATE DRAWN	BY	CHKD	APVD				
4/14/08	JGK	RS	TJK				
			12/28/10	12/28/10			
NAME				PART No.		REV	
TRS PLUG TO TRS PLUG, RoHS				TRS_ _TRS		B	