


## Specification Sheet

Part Number: T18RWPM9M4

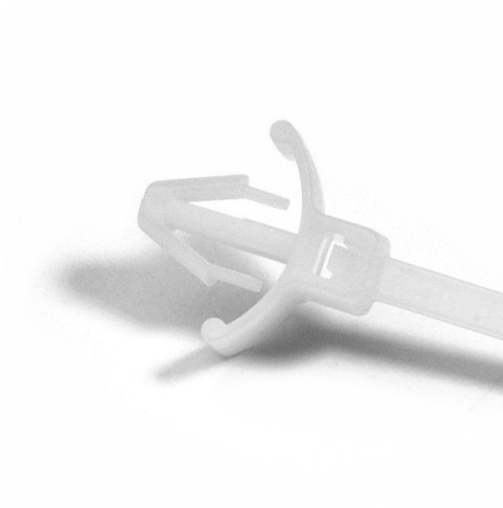

1-Piece Cable Tie/Arrowhead Mount with Wings, 4.5"L, 18lb, 0.19 - 0.22" Mtg Hole, PA66, Natural, 1000/pkg

Article Number	126-00603
Type	T18RWPM
Color	Natural (NA)
Features & Benefits	<ul style="list-style-type: none"><li>•Two piece assembly allows the mount to slide along the strap ensuring proper orientation.</li><li>•Arrowhead style mount provides low insertion and high extraction force.</li><li>•Arrowhead disc protects against dirt and other impurities.</li></ul>
Quantity Per	bag

### Product Description

Wing design helps stabilize the tie in high vibration applications. One-piece mounting ties offer a complete solution by both bundling cable and simultaneously providing a mounting solution. HellermannTyton's one-piece mounting ties offer the ideal combination of high specification materials and superior design to suit the mounting and bundling needs of complex applications.

**Short Description**

1-Piece Cable Tie/Arrowhead Mount with Wings, 4.5"L, 18lb, 0.19 - 0.22" Mtg Hole, PA66, Natural, 1000/pkg

**Global Part Name**

T18RWPM-PA66-NA

**Minimum Tensile Strength (Imperial)**

18.0

**Minimum Tensile Strength (Metric)**

80

**Length L (Imperial)**

4.5

**Length L (Metric)**

113.0

**Fixation Method**

Arrowhead

**Identification Plate Position**

none

**Releasable Closure**

No

**Tie Closure**

plastic pawl

**Variant**

Inside Serrated

**Width W (Imperial)**

0.1

**Width W (Metric)**

2.5

**Bundle Diameter Min (Imperial)**

0.06

**Bundle Diameter Min (Metric)**

1.5

**Bundle Diameter Max (Imperial)**

0.86

<b>Bundle Diameter Max (Metric)</b>	22.0
<b>Thickness T (Imperial)</b>	0.043
<b>Thickness T (Metric)</b>	1.1
<b>Height H (Imperial)</b>	.23
<b>Height H (Metric)</b>	5.80
<b>Panel Thickness Min(Imperial)</b>	0.06
<b>Panel Thickness Max(Imperial)</b>	0.13
<b>Panel Thickness Min (Metric)</b>	1.52
<b>Panel Thickness Max (Metric)</b>	3.2
<b>Mounting Hole Diameter D (Imperial)</b>	0.19 - 0.22
<b>Mounting Hole Diameter D (Metric)</b>	4.8 - 5.6 mm
<b>Mounting Hole Diameter D Min (Imperial)</b>	0.19
<b>Mounting Hole Diameter D Max (Imperial)</b>	0.22
<b>Mounting Hole Diameter D Max (Metric)</b>	5.6
<b>Disc Diameter(Metric)</b>	13.1
<b>Disc Diameter (Imperial)</b>	0.5

<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66
<b>Flammability</b>	UL 94 V2
<b>Operating Temperature (Metric)</b>	-40°F to +185°F (-40°C to +85°C)
<b>ROHS Complaint</b>	Yes
<b>Certification/Specification WEB</b>	UL-ZODZ2.E64139
<b>UL Recognized (US)</b>	Yes
<b>UL Recognized (US and Canada)</b>	Yes
<b>Package Quantity(Imperial)</b>	1000
<b>Package Quantity (Metric)</b>	1000
<b>Customs Number</b>	3926909988