

6




5

4

3

2

1

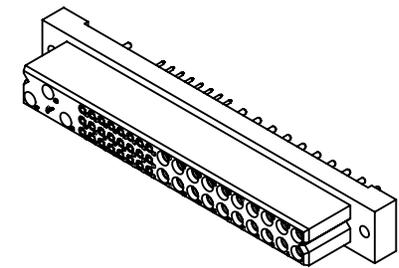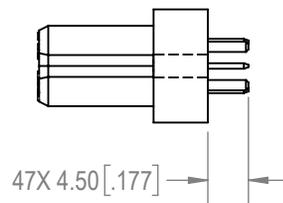
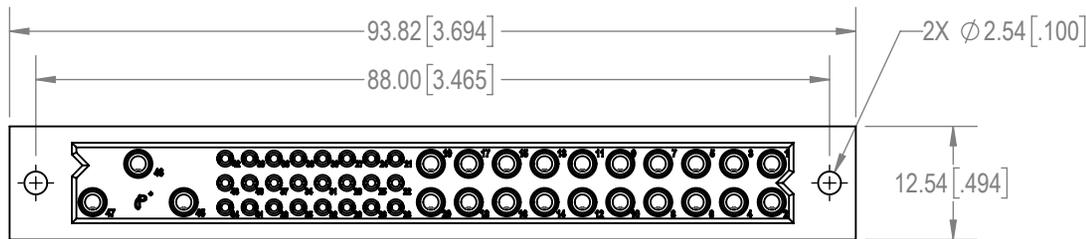


D

D

C

C

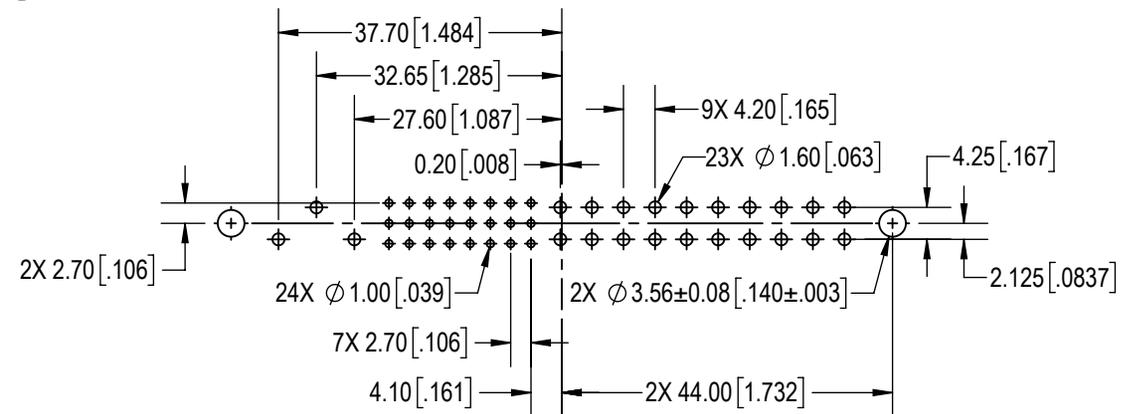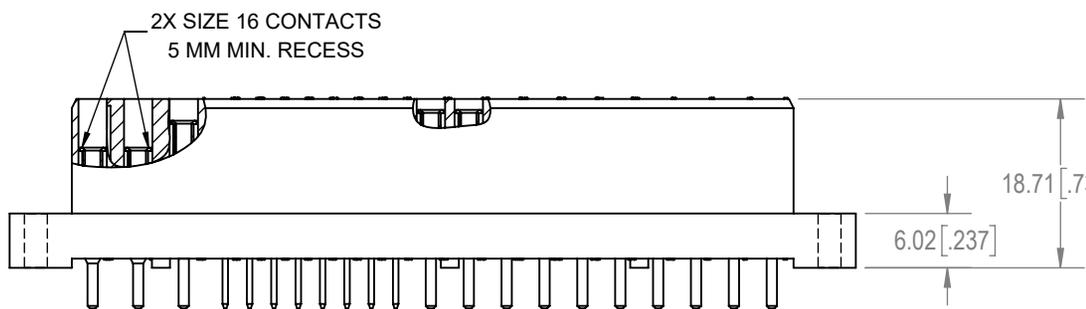

CONTACT HOLE PATTERN

**NOTES:**

- MATERIALS AND FINISH:**  
 INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR: BLUE.  
 SIZE 16 CONTACTS: PRECISION MACHINED HIGH CONDUCTIVITY COPPER ALLOY, GOLD FLASH OVER NICKEL ON MATING END AND TERMINATION END.  
 SIZE 22 CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL ON MATING END AND TERMINATION END.
- DETAILED PRODUCT, MECHANICAL AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST COMPACT POWER PRODUCT PUBLICATION AT [CONNECTPOSITRONIC.COM](http://CONNECTPOSITRONIC.COM).
- CONNECTORS ARE COMPLIANT TO THE CURRENT RoHS DIRECTIVE.

A

A

BY	GJ	CHK	ND	3RD ANGLE	<small>POSITRONIC BELIEVES THE DATA ON THE DRAWING TO BE RELIABLE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.</small>	 <b>Positronic®</b> <small>CONNECTPOSITRONIC.COM</small>
APR	PA	RELEASED DATE: 2020-12-11				
TOLERANCES				SCALE	PART NUMBER	
<small>±0.03mm [.001 INCHES] FOR MALE CONTACT MATING DIAMETERS          ±0.08mm [.003 INCHES] FOR CONTACT TERMINATION DIAMETERS          ±0.13mm [.005 INCHES] FOR ALL OTHER DIAMETERS          ±0.38mm [.015 INCHES] FOR ALL OTHER DIMENSIONS          *5° FOR ALL ANGLES          DIMENSION ARE IN MILLIMETERS [INCHES]</small>				NTS	PCIH47F300A1/AA	
				TITLE	SERIES	
				PCIH47F300A1/AA	PCIH	
				CREATED ON:	SHEET	REV
				2020-11-02	SHEET 1 OF 1	A

6

5

4

3

2

1