
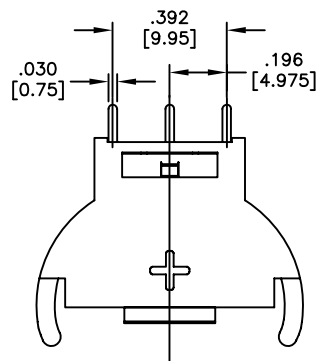
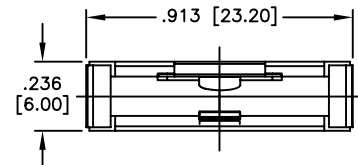

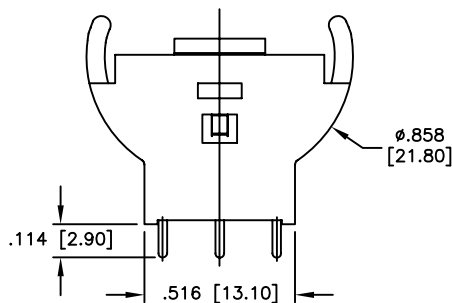


APPROVED: _____
 DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|-----|-------|-----------------|---------|-------|
| - | | RELEASED | 5/28/15 | |
| A | | UPDATED DRAWING | 8/11/16 | AY/LW |

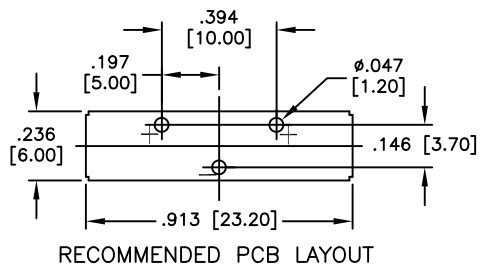

SPECIFICATIONS:

Material:
 Housing: PA66, rated UL94V-0, Color: Black
 Contact: Phosphor Bronze, Nickel plated
Electrical:
 Contact resistance: 30 Milliohms max
 Insulation resistance: 1,000 Mega ohms min
 Dielectric Voltage: 500 VAC one sec level
Temperature Rating:
 Operating temperature: -25°C to +85°C.
Environmental:
 Lead free, RoHS compliant



| | | | |
|---|--|---|---------------------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 ϕ .X ± .10 .XX ± .020 ϕ .XX ± .015 .XXX ± .015 ϕ .XXX ± .010 | | ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710 | |
| APPROVALS DRAWN AY 5/28/15 CHECKED OC 5/28/15 APPROVED | | DATE DATE DATE | |
| TITLE COIN CELL BATTERY HOLDER FOR ONE CELL CR2032 | | SIZE X | PART NO. BH-50B-1 |
| REF: S00138C | | SCALE: NTS | REV. - SHEET 1 OF 1 |