


Specification Sheet

Part Number: T50RSF9C2

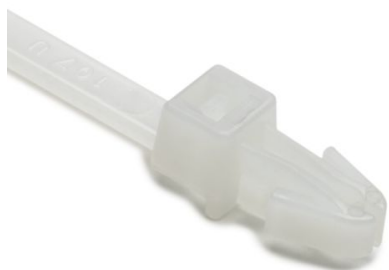

1-Piece Cable Tie/Arrowhead Mount, 8.3"L, 50lb, 0.04"–0.14" Panel Thickness, PA66, Natural, 100/pkg

Article Number	111-85789
Type	T50RSF(U)
Color	Natural (NA)
Features & Benefits	<ul style="list-style-type: none">•All-in-one bundling and fastening solution reduces costs and assembly time.•The arrowhead design of these ties offers a low insertion force and a high extraction force.•High-spec materials and superior design deliver versatility, performance and value.
Quantity Per	bag

Product Description

One-piece mounting ties offer a complete solution by both bundling cable and simultaneously providing a mounting solution. The arrowhead design of this push mount inserts easily and locks securely in place. HellermannTyton's one-piece mounting ties combine high-specification materials with superior design to deliver dependable performance in a range of applications.

Short Description	1-Piece Cable Tie/Arrowhead Mount, 8.3"L, 50lb, 0.04"-0.14" Panel Thickness, PA66, Natural, 100/pkg
Global Part Name	T50RSF(U)-PA66-NA
Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225
Length L (Imperial)	8.3
Length L (Metric)	210.82
Fixation Method	Arrowhead
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.19
Width W (Metric)	4.7
Bundle Diameter Min (Imperial)	0.06
Bundle Diameter Min (Metric)	1.6
Bundle Diameter Max (Imperial)	1.7

Bundle Diameter Max (Metric)	44.0
Thickness T (Imperial)	0.05
Thickness T (Metric)	1.2
Height H (Imperial)	.30
Height H (Metric)	7.50
Panel Thickness Min(Imperial)	0.039
Panel Thickness Max(Imperial)	0.14
Panel Thickness Min (Metric)	1.0
Panel Thickness Max (Metric)	3.56
Mounting Hole Diameter D (Imperial)	0.25 - 0.28
Mounting Hole Diameter D (Metric)	6.4 - 7.1 mm
Mounting Hole Diameter D Min (Imperial)	0.25
Mounting Hole Diameter D Max (Imperial)	0.28
Mounting Hole Diameter D Max (Metric)	7.1
Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66

Flammability	UL 94 V2
Operating Temperature (Metric)	-40°F to +185°F (-40°C to +85°C)
Reach Complaint(Article 33)	Yes
ROHS Complaint	Yes
UL Recognized (US)	Yes
UL Recognized (US and Canada)	Yes
Package Quantity(Imperial)	100
Package Quantity (Metric)	100
Customs Number	3926909988
Content Unit(BMEcat)	pcs.
Weight (Metric)	1.5