

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


ALL RIGHTS RESERVED.

© COPYRIGHT - TE Connectivity

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	REVISED PER OL20-0045-97	24MAR97	DKS	CHK
	K1	REVISED PER ECO-17-004099	28AUG2017	RS	DR

<b>AMP</b> WIRE RANGE	E13288 Listed
2 AWG SOLID OR STRANDED	2 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
2 AWG SOLID OR STRANDED	NOT APPLICABLE

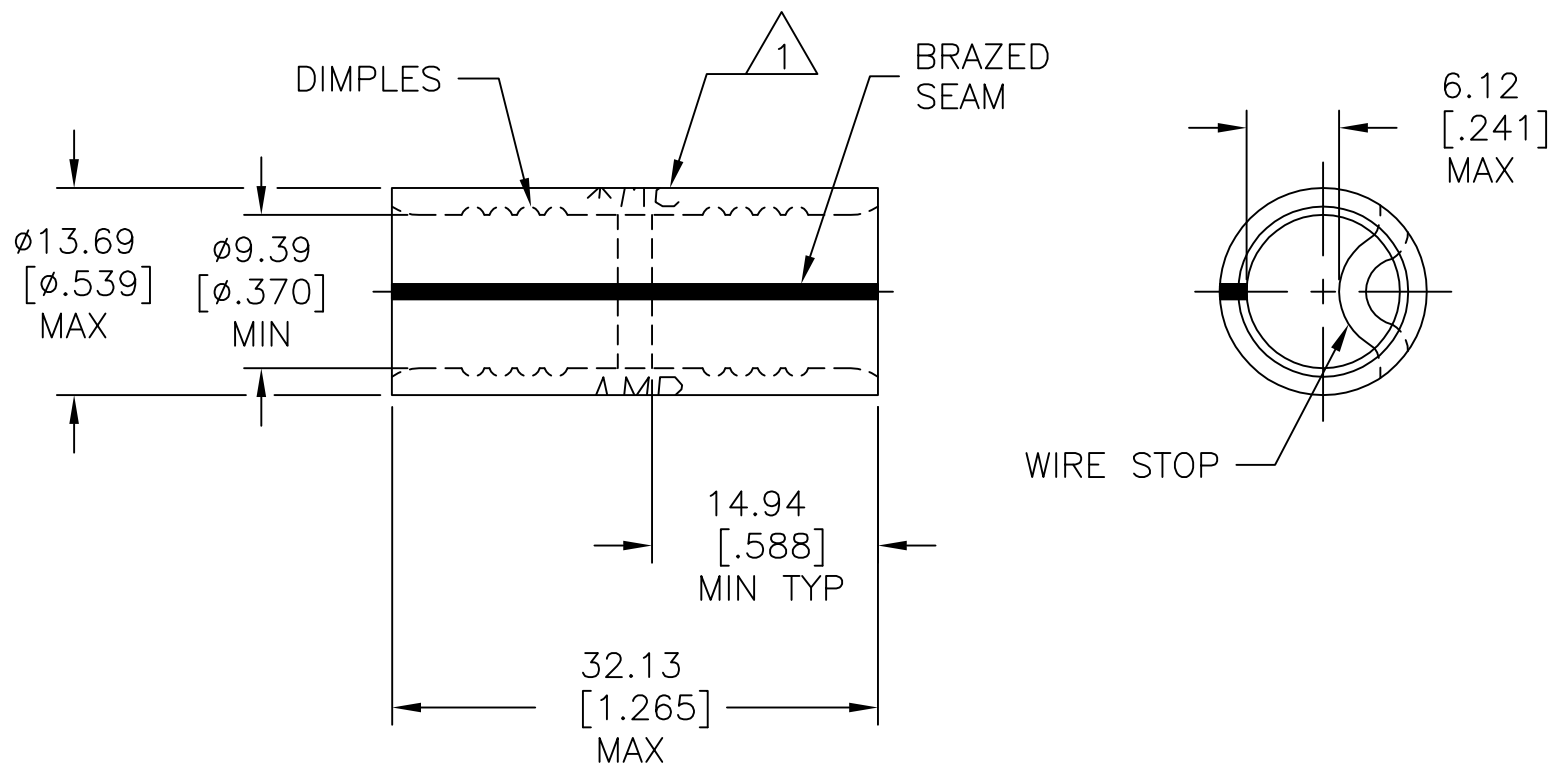

- 1 STAMP AMP 2W\* 60-75 APPROX AS SHOWN.
- 2 MATERIAL THK: 1.78±0.08[.070±.003].

50	LOOSE PIECE	35189
QTY.	PACKAGE TYPE	PART NO

AMP INCORPORATED  
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS  
PRODUCT INFORMATION CENTER  
1-800-522-6752

FOR APPLICATION TOOLING INFORMATION  
TOOLING ASSISTANCE CENTER  
1-800-722-1111

FOR ORDER ENTRY  
1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:  
170°C [338°F] MAX

VOLTAGE RATING:  
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:  
26.7-42.4mm<sup>2</sup> [52,600-83,700] CIR MILLS  
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± 0.20[.008]
3 PLC	± -
4 PLC	± -
ANGLES	± -

MATERIAL  
COPPER ASTM B-152  
ANNEALED

FINISH  
TIN PLATE  
0.00254[.000100] MIN  
THK PER ASTM B545

DWN DK SCHRUM 5/21/93

CHK RD HEIM 1/27/94

APVD RE ROSER 1/27/94

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

**STE** TE Connectivity

NAME  
SPLICE, BUTT,  
SOLISTRAND,™ 2 AWG

SIZE A3 CAGE CODE 00779 DRAWING NO C-35189 RESTRICTED TO -

SCALE 2:1 SHEET 1 OF 1 REV K1