


UNCONTROLLED DOCUMENT

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	25 Ω	80 Ω	220 Ω
Minimum	- Ω	64 Ω	- Ω

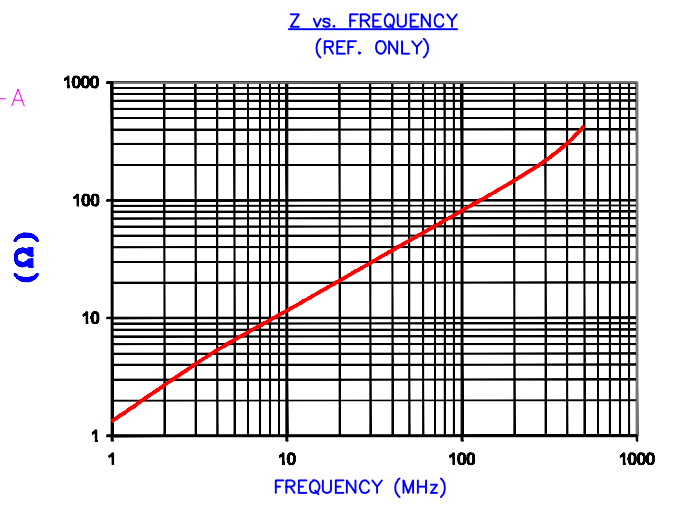

AGILENT E4981A Impedance/Material Analyzer
HP 16092A-Test Fixture

FERRITE CORE DIMENSIONS (SPEC): mm [in.]

A	22.80 [.898]	+	0.34 [.013]
B	18.70 [.736]	+	0.28 [.011]
C	5.00 [.197]	+	0.20 [.008]
D	2.80 [.110]	+	0.20 [.008]
E	0.70 [.028]	+	0.15 [.006]

WEIGHT/1000 1.20 kgs [2.65 Lbs]

SCALE DRAWING 1:1

28R0898-000

DIMENSIONS ARE IN mm[INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.				
				PROJECT/PART NUMBER:		REV:	PART TYPE:	DRAWN BY:
C RE-ACTIVATE PRINT, UPDATE COMPANY LOGO, CHG C DIMS FROM 6.00 CHG Z SPEC @ 100 MHZ				28R0898-000		C	FERRITE RIBBON CORE	TMB
B CHANGE PRINT FORMAT CHANGE Z SPECS				DATE: 10/17/02		SCALE: 4 : 1		MATERIAL:
A ORIGINAL DRAFT				DATE: 10/17/02		TOOL #		NiZn Ferrite
REV DESCRIPTION				DATE		TOOL #		