




- Ethernet based LAN, WAN and other networking applications
- Cw/w: 5pF Max 100KHz, 0.1V
- LL: 0.10μH Max @ 100KHz, 0.1V
- Operating Temp: -40°C to +85°C



Electrical Specifications @ 25°C				
Part Number	OCL(uH Min) @ 100kHz, 0.1V	Turns Ratio chip: cable (±5%)	DCR (Max)	Isolation HI-POT (Vrms)
	With 8mA DC Bias			
AT1619CI	15	1CT:1CT	0.2 Ω	2000

All specifications subject to change without notice.

MECHANICAL

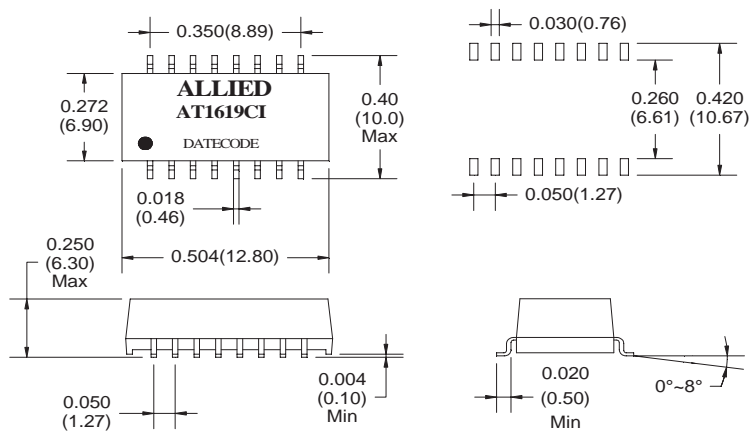

SCHEMATICS

