



SECTION A-A

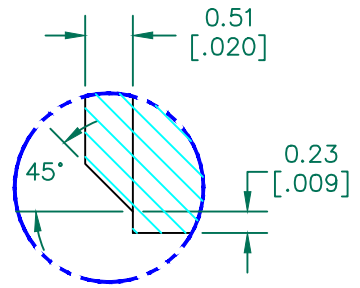


DETAIL A
SCALE 13:1

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

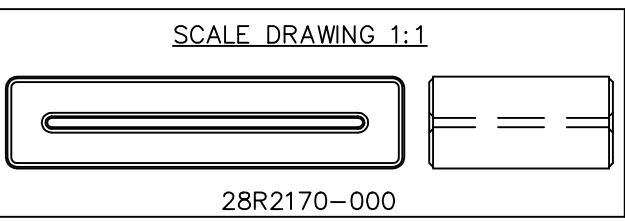

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	110 Ω	280 Ω	550 Ω
Minimum	- Ω	224 Ω	- Ω

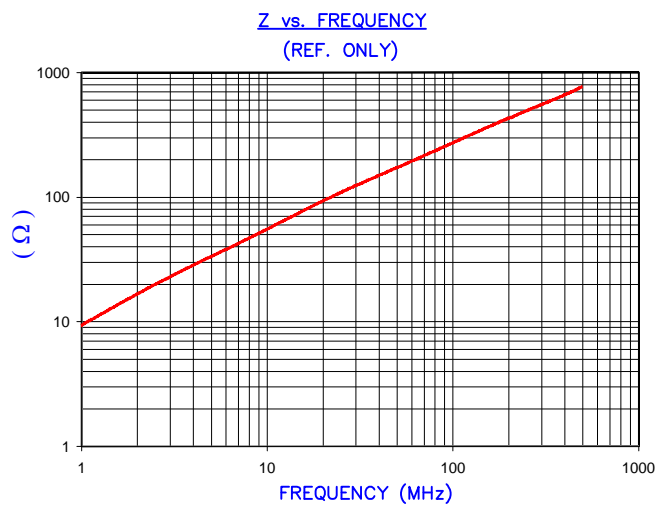

AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture REF#3025

UNCONTROLLED DOCUMENT

RoHS

FERRITE CORE DIMENSIONS (SPEC):mm[Inches]

A	55.12 [2.170]	+	0.80 [.031]
B	43.69 [1.720]	+	0.80 [.031]
C	25.40 [1.000]	+	0.76 [.030]
D	12.70 [.500]	+	0.51 [.020]
E	1.27 [.050]	-	0.20 [.008]

WEIGHT/1000 80.28 kgs 176.99 Lbs

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
J	UPDATE THE LOGO	06/19/15	QIU	PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
H	RIVISE A B TOLERANCE	03/30/11	Jcai	28R2170-000	J	CNZ RIBBON CORE	LNK
G	UPDATE MIN Z SPECS & COMPANY LOGO	07/27/07	TMB	DATE:	SCALE:	MATERIAL:	
F	UPDATE MIN Z SPEC@100 MHz ADD REF#	02/19/04	JRK	02/03/93	1.5 : 1	Ferrite	
E	UPDATE TO NEW CNZ FORMAT ADD Z CURVE CHANGE TOLERANCE ON E DIMENSION	02/28/03	JRK	CAD #	TOOL #		
D	UPDATE PRINT FOR ELECTRONIC DATABASE	01/10/01	JAJ	28R2170-000-J	R2170		
C	UPDATED P/N FOR NEW CATALOG	11/10/95	JBE				
B	REVISED DRAWING	07/06/94	JAZ				
A	ORIGINAL DRAFT	02/03/93	LNK				
REV	DESCRIPTION	DATE	INT				