

STRADA-2X2-XW

Extra wide beam for wide area security lighting


TECHNICAL SPECIFICATIONS:

Dimensions	50.0 mm
Height	7.1 mm
Fastening	glue, pin, screw
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	8.4 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:


Component	Type	Material	Colour
STRADA-2X2-XW	Multi-lens	PMMA	clear

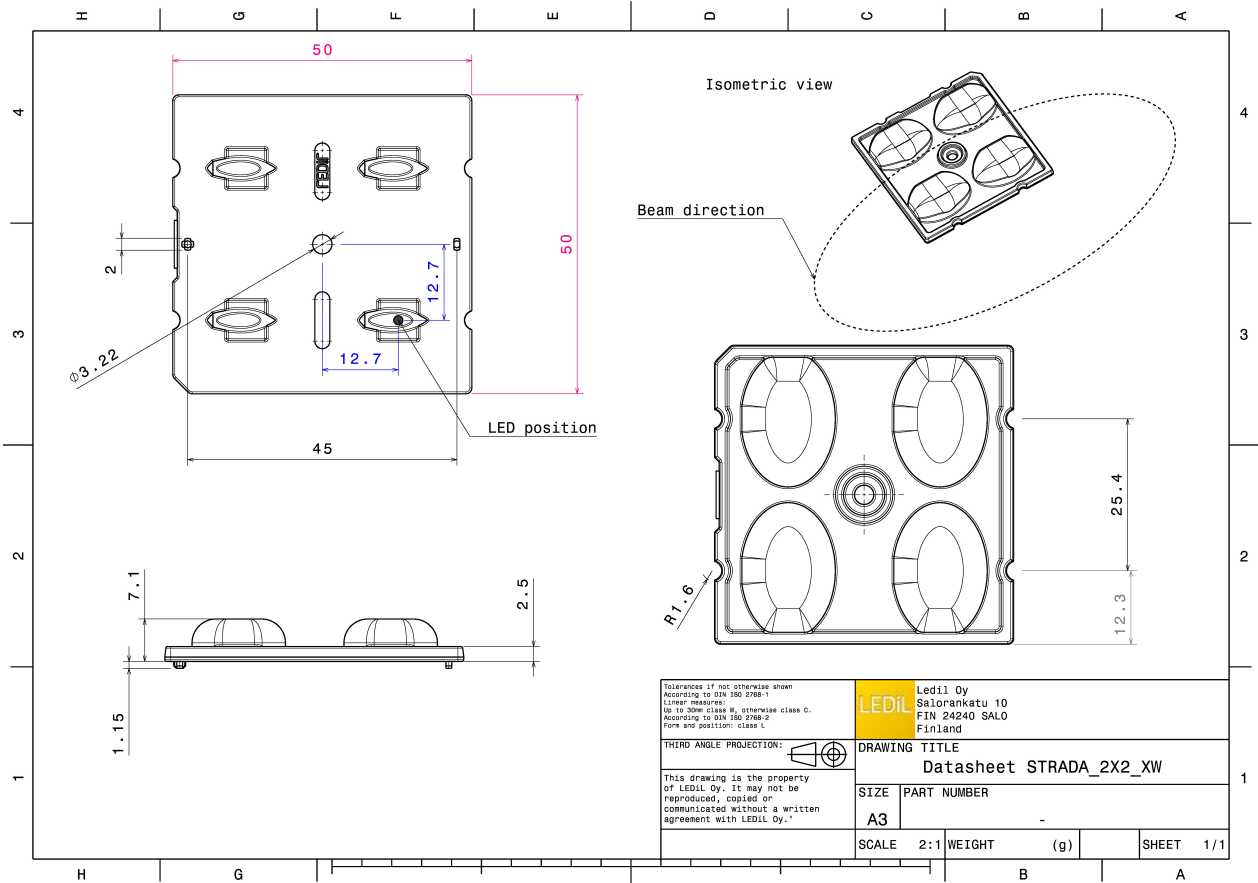


PHOTOMETRIC DATA (MEASURED):




LED QUICK FLUX XTP 2x4 xxx LS G5
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.830 cd/lm
LEDs/each optic 1
Light colour White
Required components:

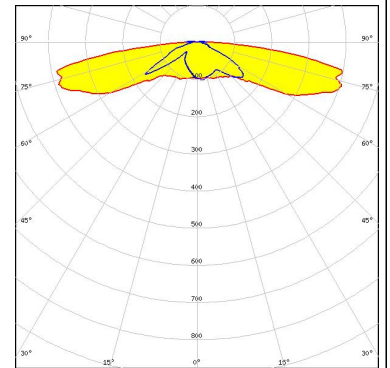


LED QUICK FLUX XTP 2x6 xxx LS G5
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.850 cd/lm
LEDs/each optic 1
Light colour White
Required components:

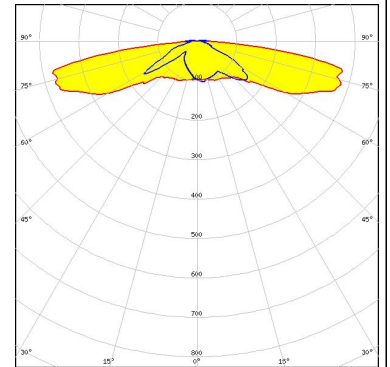

LED XB-H
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.870 cd/lm
LEDs/each optic 1
Light colour White
Required components:

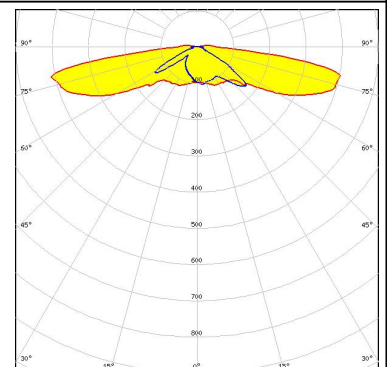


LED XP-E
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.110 cd/lm
LEDs/each optic 1
Light colour White
Required components:

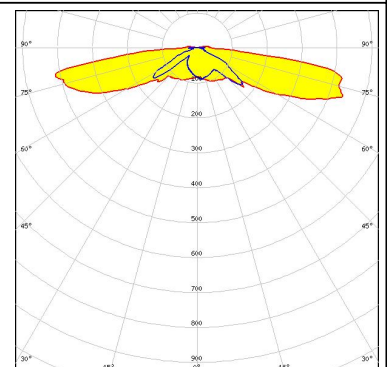

PHOTOMETRIC DATA (MEASURED):


CREE

LED XP-E2
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.120 cd/lm
LEDs/each optic 1
Light colour White
Required components:

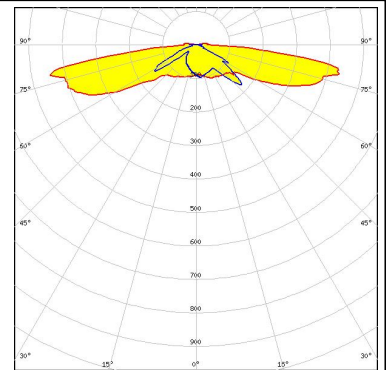


CREE

LED XP-G
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.900 cd/lm
LEDs/each optic 1
Light colour White
Required components:

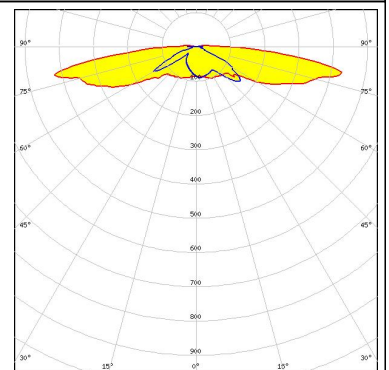


CREE

LED XP-G3
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.790 cd/lm
LEDs/each optic 1
Light colour White
Required components:

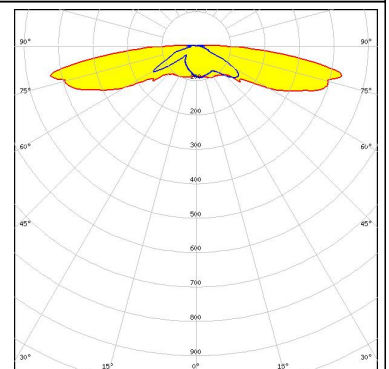

CREE


LED XT-E
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.850 cd/lm
LEDs/each optic 1
Light colour White
Required components:

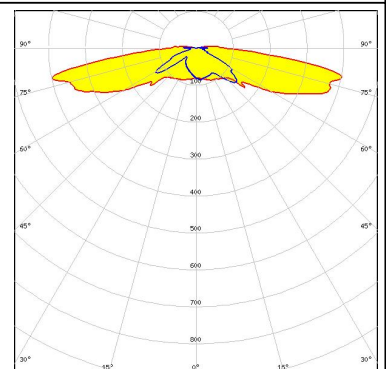

PHOTOMETRIC DATA (MEASURED):


LG Innotek

LED H35C1 (LEMWA33)
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.950 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

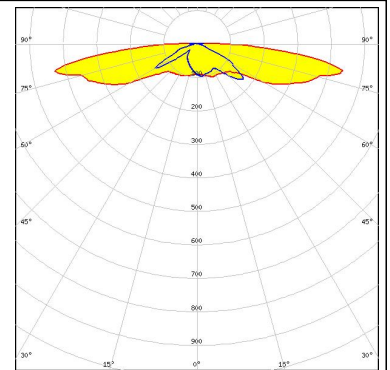


LUMILEDS

LED LUXEON 5050 Round LES
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

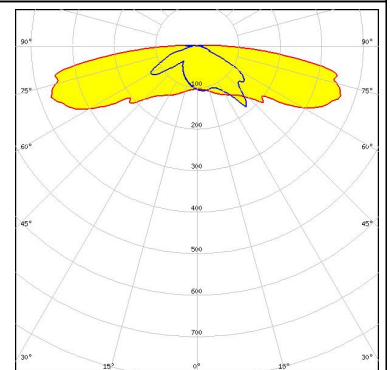


LUMILEDS

LED LUXEON MZ
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.740 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

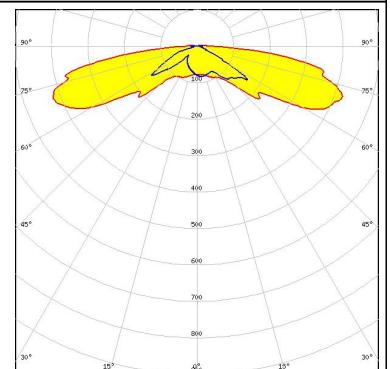

LUMILEDS


LED LUXEON T
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.930 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

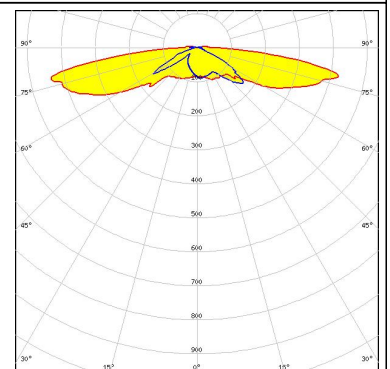

PHOTOMETRIC DATA (MEASURED):



LUMILEDS

LED LUXEON TX
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.000 cd/m
LEDs/each optic 1
Light colour White
Required components:

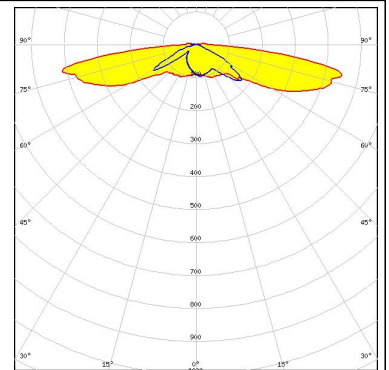


NICHIA

LED NVSW3x9A
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.720 cd/m
LEDs/each optic 1
Light colour White
Required components:

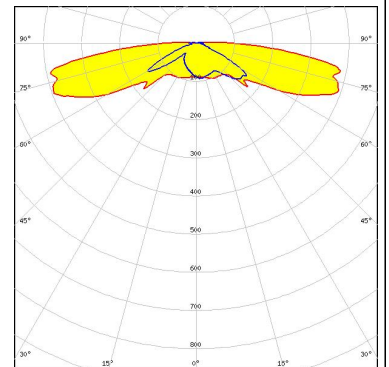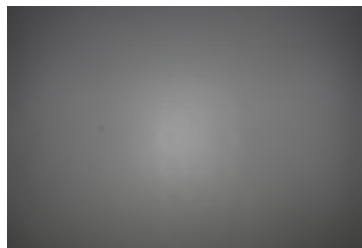


NICHIA

LED NVSxE21A
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.100 cd/m
LEDs/each optic 1
Light colour White
Required components:

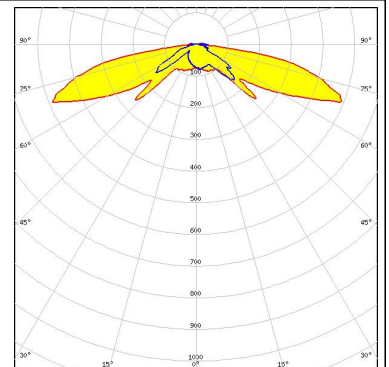

NICHIA

LED NVSxx19B/NVSxx19C
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.800 cd/m
LEDs/each optic 1
Light colour White
Required components:

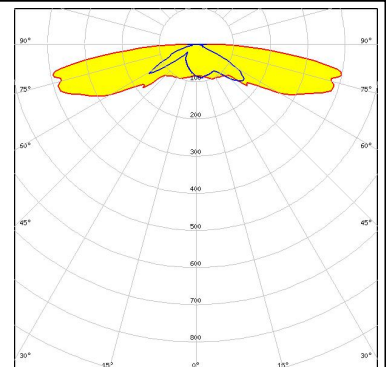


PHOTOMETRIC DATA (MEASURED):

OSRAM

Opto Semiconductors


LED Duris S8
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.470 cd/lm
LEDs/each optic 1
Light colour White
Required components:

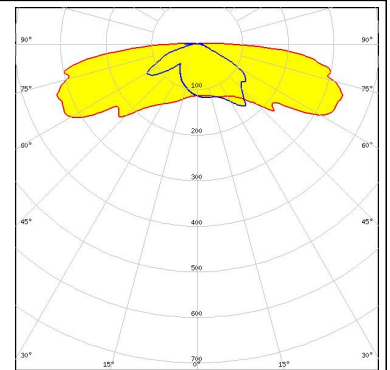

OSRAM


Opto Semiconductors

LED OSOLON Square PC
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.870 cd/lm
LEDs/each optic 1
Light colour White
Required components:

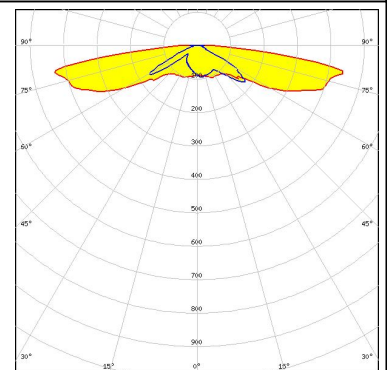


PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.800 cd/lm
LEDs/each optic 1
Light colour White
Required components:

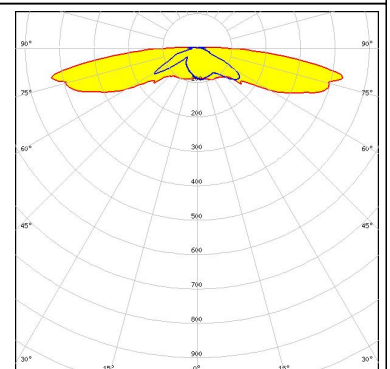
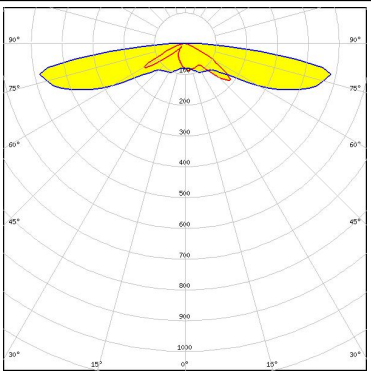

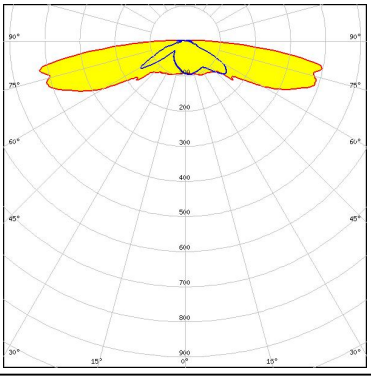

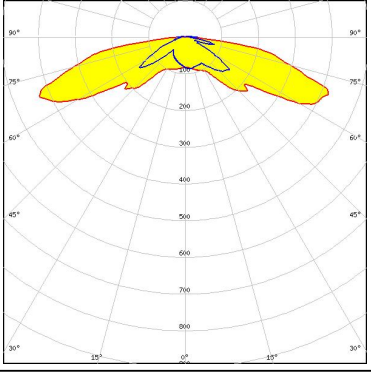

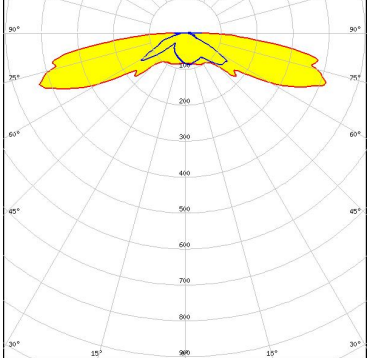


SAMSUNG

LED LH351B
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.830 cd/lm
LEDs/each optic 1
Light colour White
Required components:

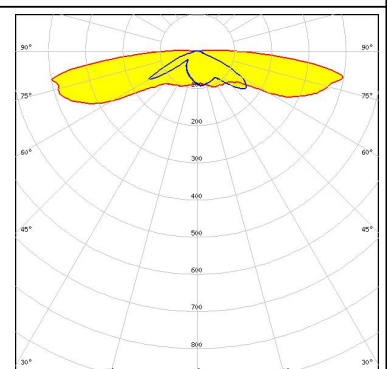


PHOTOMETRIC DATA (MEASURED):

<p> SEUL SEMICONDUCTOR</p> <p>LED Z5M1/Z5M2 FWHM Asymmetric Efficiency 94 % Peak intensity 1.000 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p> SEUL SEMICONDUCTOR</p> <p>LED Z5M3 FWHM Asymmetric Efficiency 94 % Peak intensity 0.780 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p> SEUL SEMICONDUCTOR</p> <p>LED Z8Y22 FWHM Asymmetric Efficiency 94 % Peak intensity 0.730 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p> SEUL SEMICONDUCTOR</p> <p>LED Z8Y22P FWHM Asymmetric Efficiency 94 % Peak intensity 0.760 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	

PHOTOMETRIC DATA (MEASURED):

TOSHIBA Leading Innovation >>>

LED TL1L4
FWHM Asymmetric
Efficiency 90 %
Peak intensity 0.880 cd/lm
LEDs/each optic 1
Light colour White
Required components:

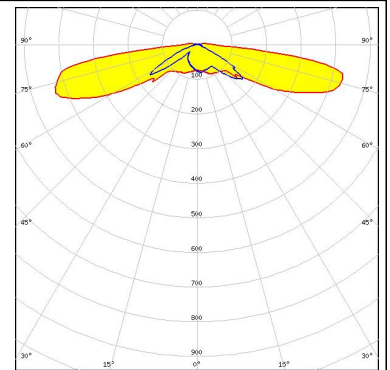


TRIDONIC

LED RLE 2x4 2000lm HP EXC2 OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:


TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:

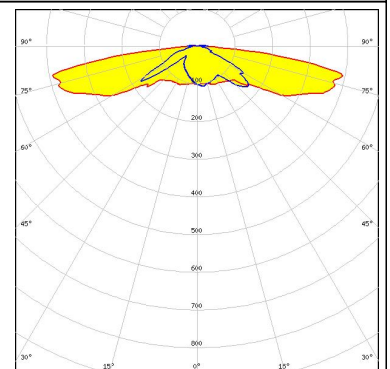

TRIDONIC


LED RLE G1 49x121mm 2000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.860 cd/lm
LEDs/each optic 1
Light colour White
Required components:

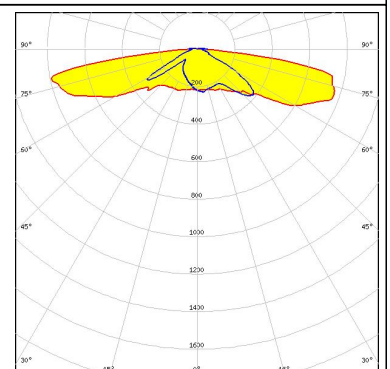

PHOTOMETRIC DATA (MEASURED):


TRIDONIC

LED RLE G1 49x133mm 2000lm xxx EXC OTD
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.860 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

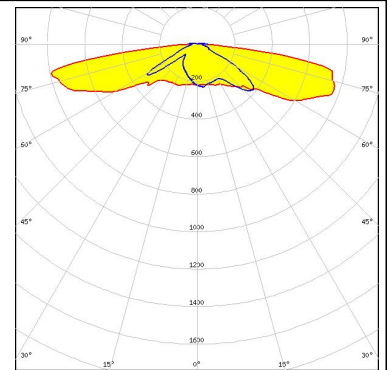


TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.860 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

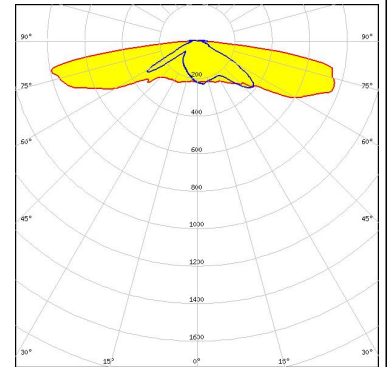

TRIDONIC


LED RLE G1 49x245mm 4000lm xxx EXC OTD
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.860 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

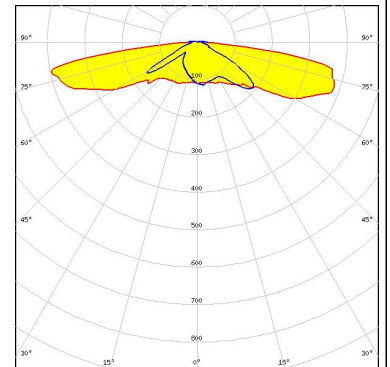


PHOTOMETRIC DATA (SIMULATED):




LED J Series 5050
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.510 cd/lm
LEDs/each optic 1
Light colour White
Required components:

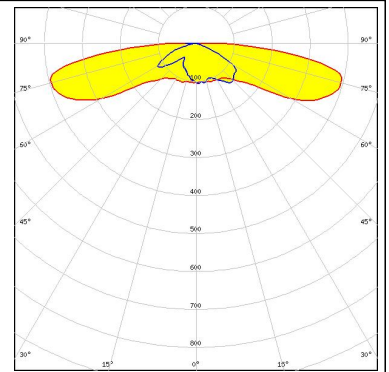


LED XP-G2 HE
FWHM Asymmetric
Efficiency 85 %
Peak intensity 0.611 cd/lm
LEDs/each optic 1
Light colour White
Required components:

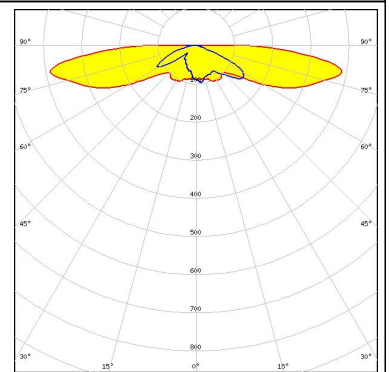

LED H35C0 (LEMWA33)
FWHM Asymmetric
Efficiency 92 %
Peak intensity 0.800 cd/lm
LEDs/each optic 1
Light colour White
Required components:

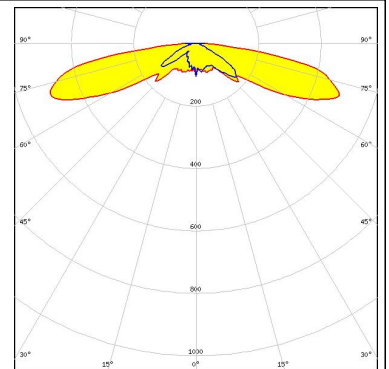


LED PrevaLED Brick HP 2x8
FWHM Asymmetric
Efficiency 86 %
Peak intensity 0.850 cd/lm
LEDs/each optic 1
Light colour White
Required components:

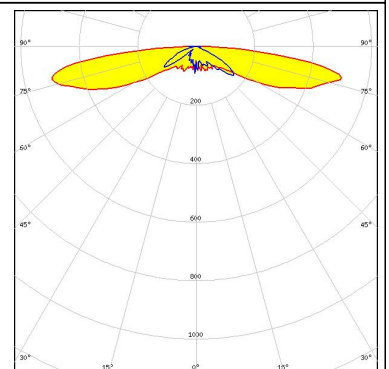

PHOTOMETRIC DATA (SIMULATED):


OSRAM
Opto Semiconductors

LED OSCONIQ P 3737 (2W version)
 FWHM Asymmetric
 Efficiency 87 %
 Peak intensity 0.810 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

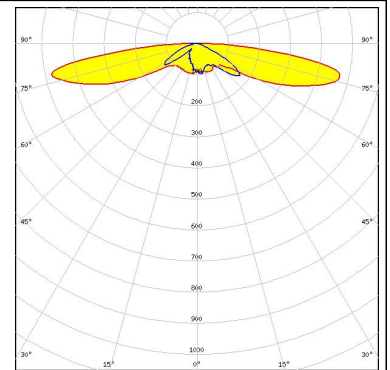


OSRAM
Opto Semiconductors

LED OSCONIQ P 3737 (3W version)
 FWHM Asymmetric
 Efficiency 90 %
 Peak intensity 0.660 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

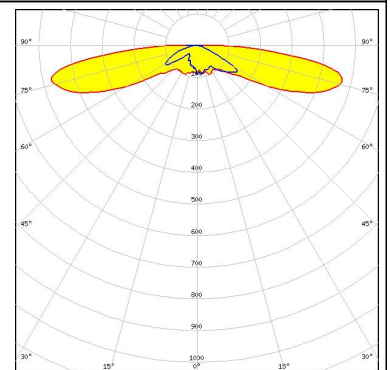


OSRAM
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3
 FWHM Asymmetric
 Efficiency 86 %
 Peak intensity 0.850 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:




OSRAM
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3
 FWHM Asymmetric
 Efficiency 66 %
 Peak intensity 0.520 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

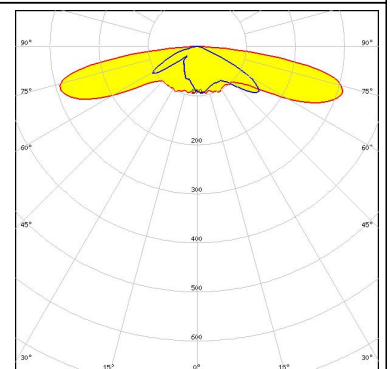

Transparent protective cover

PHOTOMETRIC DATA (SIMULATED):

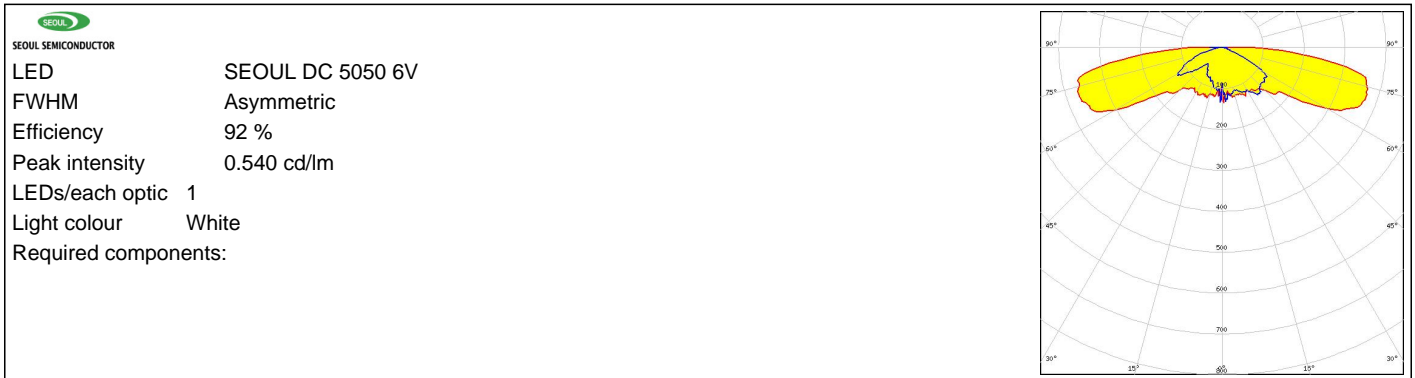

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)