


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)
4. Package in Bulk per PO

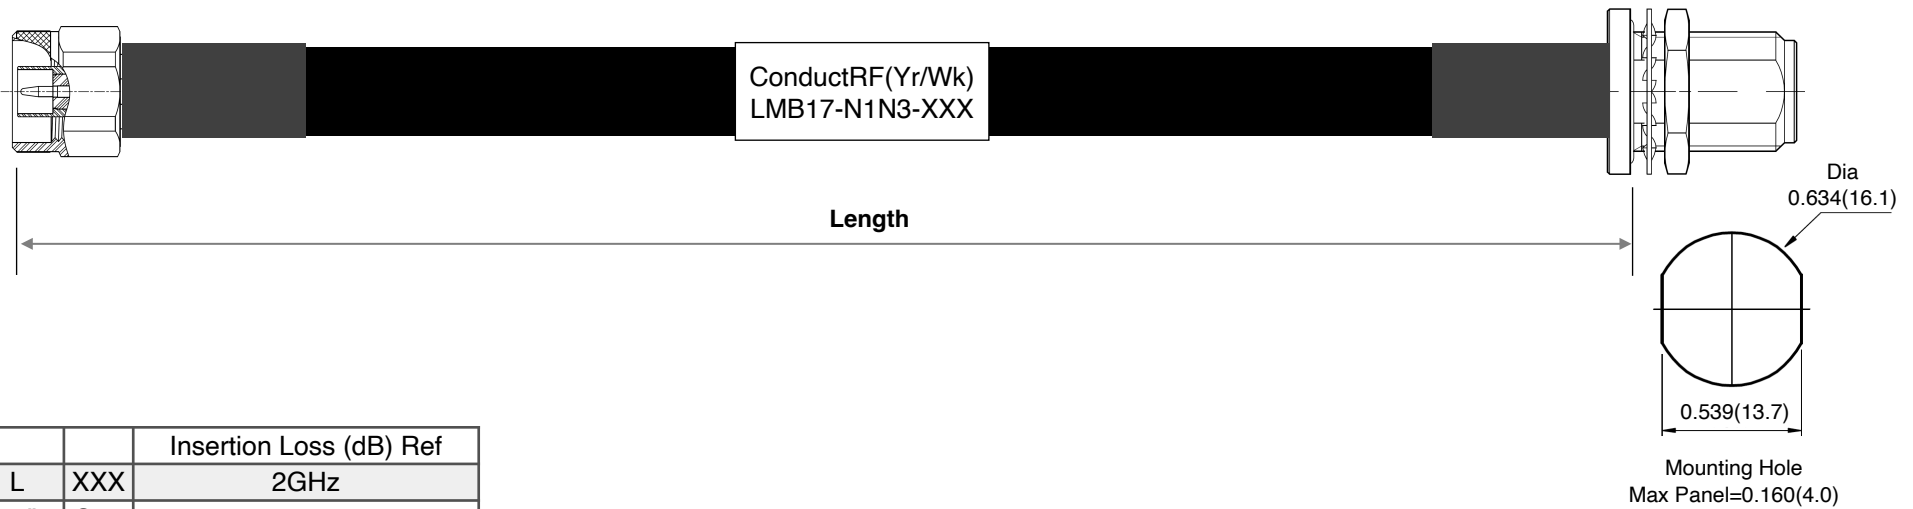

		Insertion Loss (dB) Ref
L	XXX	2GHz
24"	S24	0.28
36"	S36	0.36
48"	S48	0.44
60"	S60	0.52
72"	S72	0.60
10ft	F10	0.91
VSWR	1.40:1(MAX)/Typ. <1.35:1	

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 MXM = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

5	Strain Relief	FT.	As Needed	Shrink Tube	Black
4	Marker	FT.	As Needed	Shrink Tube	White
3	Coax Cable	FT.	As Needed	LMR-400UF	Black TPE
2	Type-N Bkhd Jack	EA.	1	N5F34A-A17W01	Tri-Metal
1	Type-N Plug	EA.	1	N5M15F-A17W01	Tri-Metal
ITEM	DESCRIPTION	UOM	QTY	MATERIALS	FINISH

					Customer DWG	Title: LMR400UF Type-N Male - BKHD Female				
					Remarks: 04/04/10	Date: 08/08/22	Contact: Sales@ConductRF.com Tel: +1 978 374 6840	Range: LMR	Sheet 1 of 1	
1	Pre-Release		DG	08/08/22	Dwg Ref: LMB17-N1N3					
REV.	DESCRIPTION	ECN	DRAWN	DATE	Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked:JW	Approved: PL	Rev: 1	Part No: LMB17-N1N3-XXX	
REVISION HISTORY										