


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.2242, BS	09/17/03	BS
B	ADD 'CE' TO APPROVALS, RFS. 7493, MS	11/18/05	BS
C	ADD ROHS, RFS. 14723, BS	10/02/08	BS
D	UPDATE APPROVALS, ADD GOST, ENEC, RFS. 25480, BS	04/11/14	BS
E	ADD 'NF' TO CABLE APPROVALS, RFS. 25606, JN	08/13/14	HM

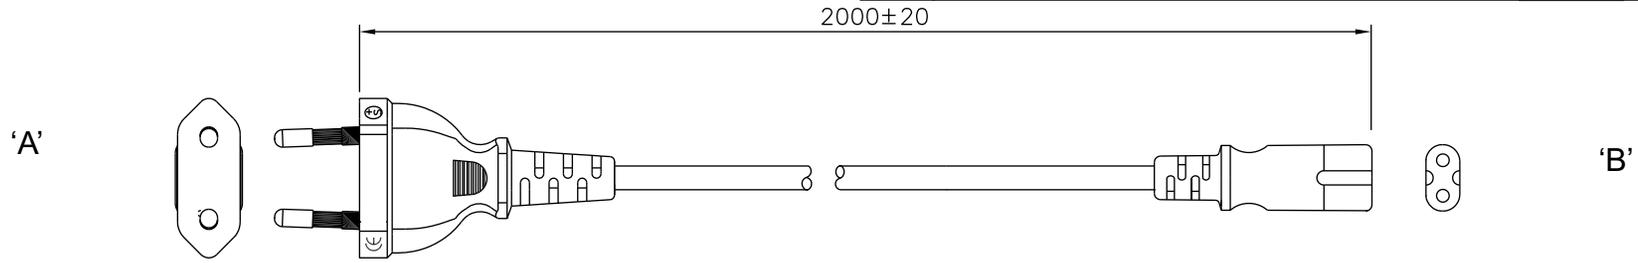


GENERAL SPECIFICATIONS:

RATING: 2.5A / 250V AC
 CABLE TYPE / SIZE: H03VVH2-F, 2 x 0.75 mm²
 TEMPERATURE RATING: 70° C
 CONDUCTOR COLORS: BROWN / BLUE
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 2000 ± 20 mm
 CABLE OUTER DIAMETER: 3.5 x 5.7 ± 0.15 mm
 END 'A' PLUG; CEE 7/16
 END 'B' IEC-320 / C7
 APPROVALS PLUG: VDE, N, S, D, FI, KEMA, CEBC, OVE, IMQ, SEV, CE, NF, GOST
 APPROVALS CABLE: VDE, N, S, D, FI, KEMA, CEBC, OVE, SEV, CE, NF
 APPROVALS CONNECTOR: ENEC - VDE


PACKING:

HANKED
 L = 125 ± 25 mm

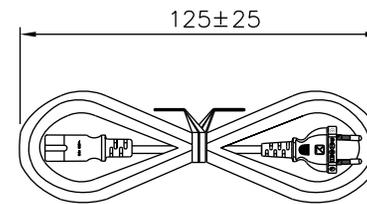

NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

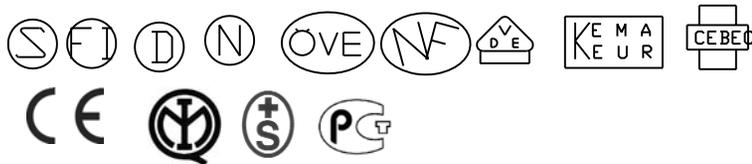

2. CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



RELEASED
 By N.Frost at 10:29 am, Aug 14, 2014

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: BS	DATE: 09/17/03	DWG TITLE: CONTINENTAL EUROPEAN DETACHABLE CORDSET		
DRAWN: NF	DATE: 09/17/03	FSCN No.: G, CC	SIZE: A	REV. E
APRVD: BS	DATE: 09/17/03	SCALE: NONE	PART NO: 2074112M703A(R)	SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice