
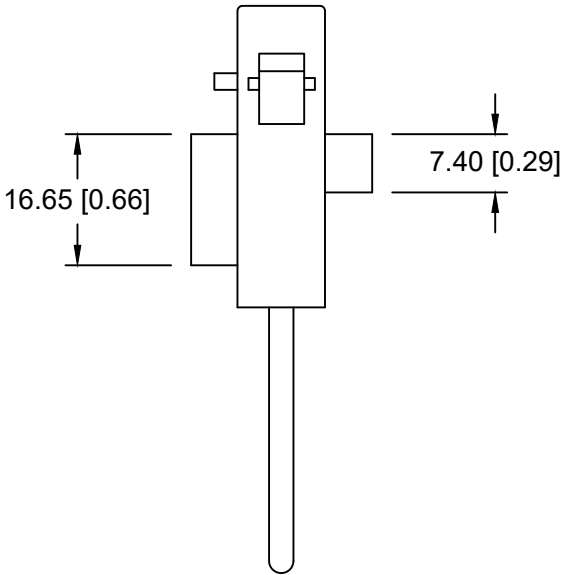



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/12/19	A	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
11/26/19	B	WAS RATED 20AMP. ADDED WIRE LENGTH	T.B.	B.S.	

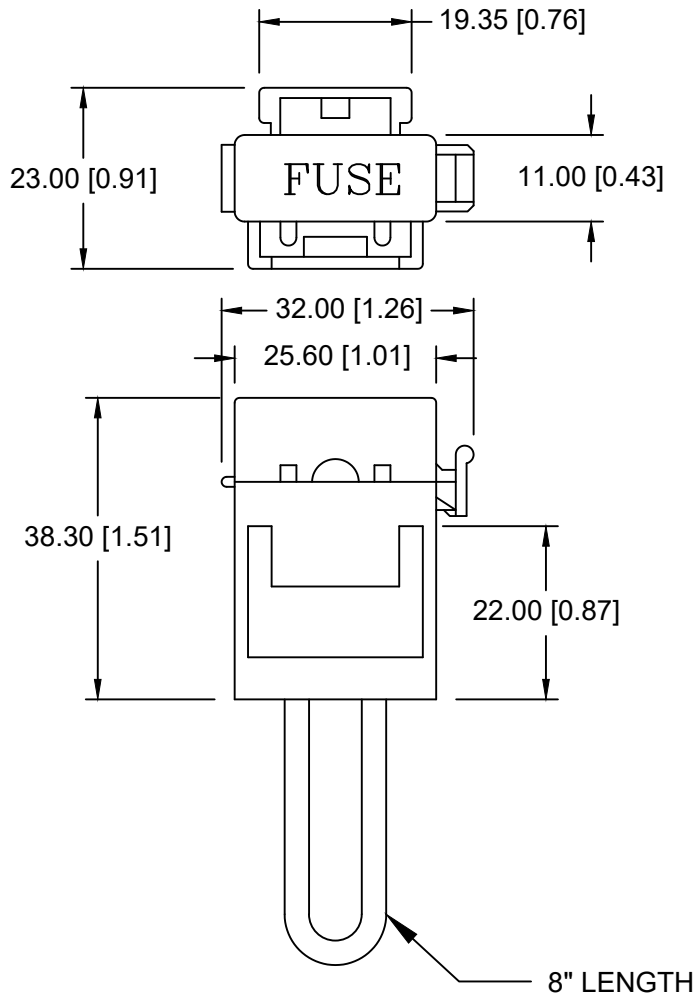

NOTES:

1. MATERIAL:
HOUSING : NYLON 66,UL94V-2, FLEX 60GPVC, UL FILE NO. E174939
 2. WIRE: 8" LONG RED WIRE, 16 AWG, UL 1015, 600V, 105°C,
FLAME RATED VW-1, UL FILE NO. E250011 OR ENGINEERING
APPROVED EQUIVALENT
 3. RATED CURRENT: 15A
 4. ACCEPTS ATP/ATC/ATO FUSES
 5. INSULATION RESISTANCE AT 500V DC: 100MΩ MIN
 6. CONTACT RESISTANCE: 5mΩ AT 1A DC
 7. DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1500V MIN
- ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title INLINE FUSE HOLDER		
Angular ± 3°	Date 11/26/19	Drawing Number BF352	