




CATIA V5

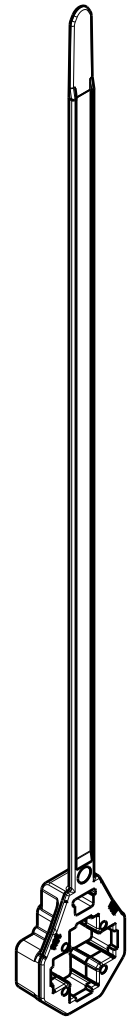

Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
01.2	Design Release	-	SEE ECN# 014026	KVH	10/5/17	EJF	10/6/17

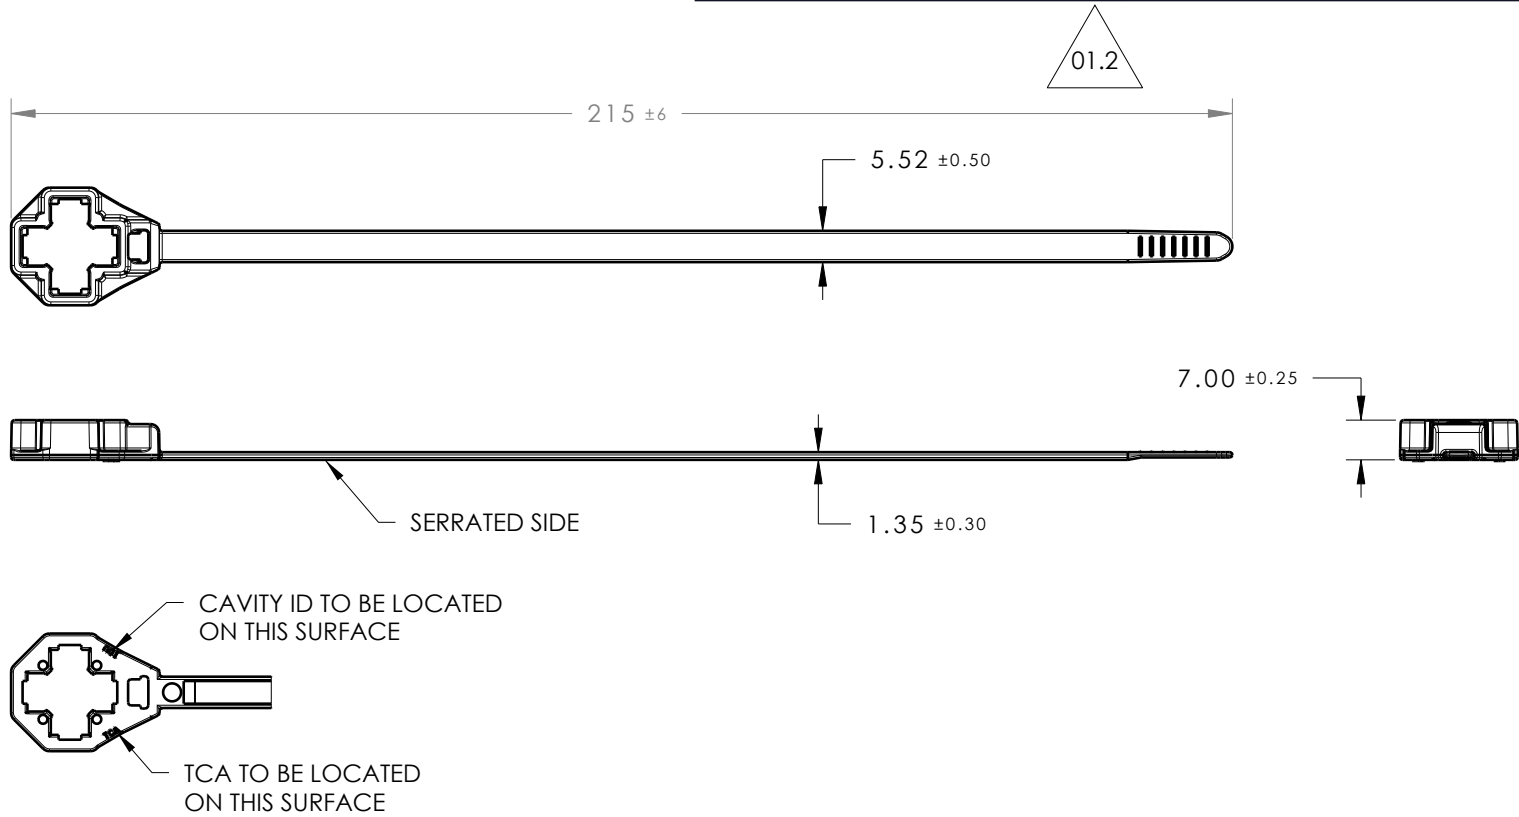

ISOMETRIC VIEW

REFERENCE:

1. STUD MOUNT PUSH ON FORCE: 45 NEWTONS (10 LBS) MAX ON EACH APPLICABLE STUD SIZE AT DRY AS MOLDED
2. STUD MOUNT PULL OFF FORCE: 222 NEWTONS (50 LBS) MIN ON EACH APPLICABLE STUD SIZE AT 2.0 TO 2.5% MOISTURE
3. APPLICABLE STUD SIZE:
  - A. M10 x 1.50
4. CABLE TIE MIN LOOP TENSILE STRENGTH: 355 NEWTONS (80LBS)
5. BUNDLE RANGE: 3.5MM TO 50MM
6. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
7. MAX ALLOWABLE FLASH OR MISMATCH TO BE 0.5MM

MATERIAL	COLOR
PA66HIRHS	BLACK
PA46	BROWN

Material SEE CHART COLOR: SEE CHART	Units	millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	EJF	4/17/17	Article/Type-No T80ROSLPSB10U	Scale	3:4	
	Tolerance defined on each dimension			Approved	KVH	4/17/17		Title LOW PROFILE M10 STUD MOUNT WITH 80LB CABLE TIE	Project Number	16-0335
				Drawing-No <b>16-0335-011-CSU</b>			Production : Phase		Format	AH
				North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Sheet 1/1			