



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/12/19	A	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
11/26/19	B	WAS RATED 20AMP. ADDED WIRE LENGTH	T.B.	B.S.	

## HINGED BODY TYPE

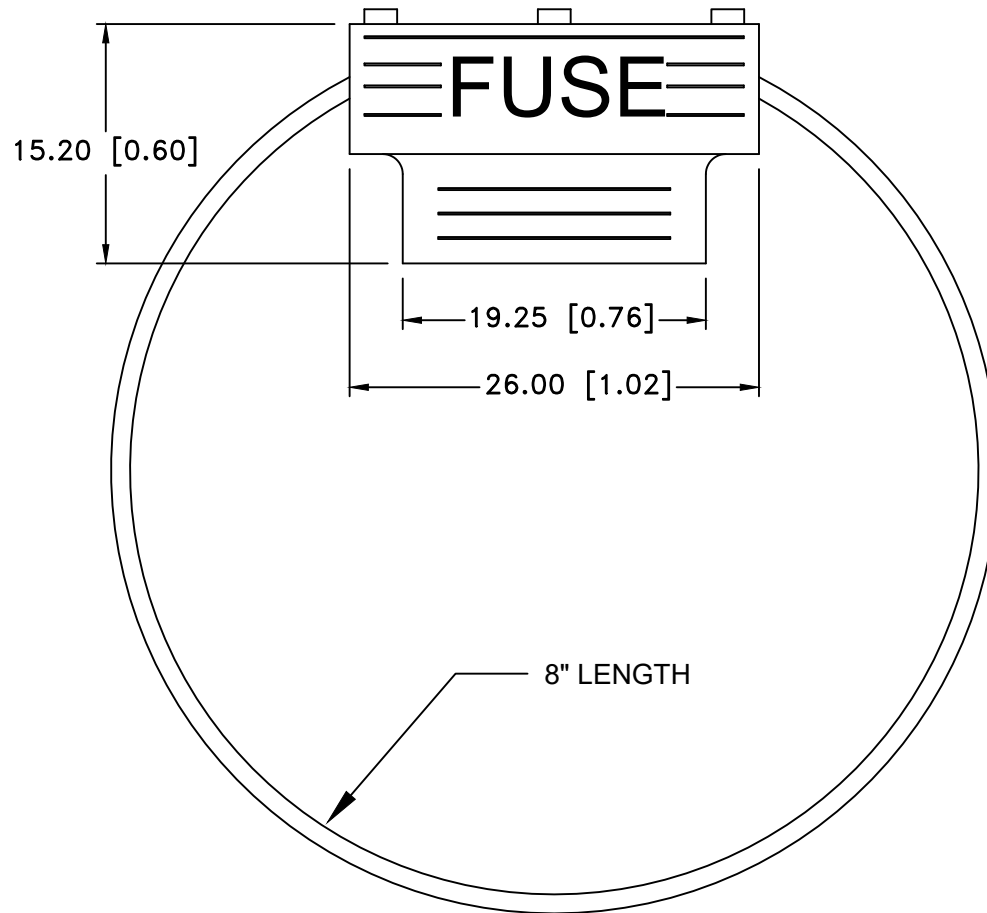

### NOTES:

- MATERIAL:  
HOUSING : NYLON 66, UL 94V-2, UL FILE NO. E41938
  - LEAD WIRE IN LOOP: RED WIRE, 16AWG, UL-1015, 600V, 105°C, FLAME RATING VW-1, UL FILE NO. E250011, OR ENGINEERING APPROVED EQUIVALENT
  - RATED CURRENT: 15A
  - ACCEPTS ATP/ATC/ATO FUSES
  - INSULATION RESISTANCE AT 500V DC: 100M  $\Omega$  MIN
  - CONTACT RESISTANCE: 5m  $\Omega$  AT 1A DC
  - DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1500V MIN
- ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional $\pm .8$ (.030)	Title INLINE FUSE HOLDER		
Angular $\pm 3^\circ$	Date 11/26/19	Drawing Number BF355	