





Dimensions

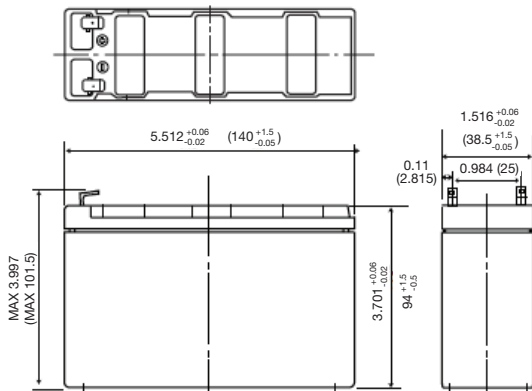

Duration of Discharge vs. Discharge Current

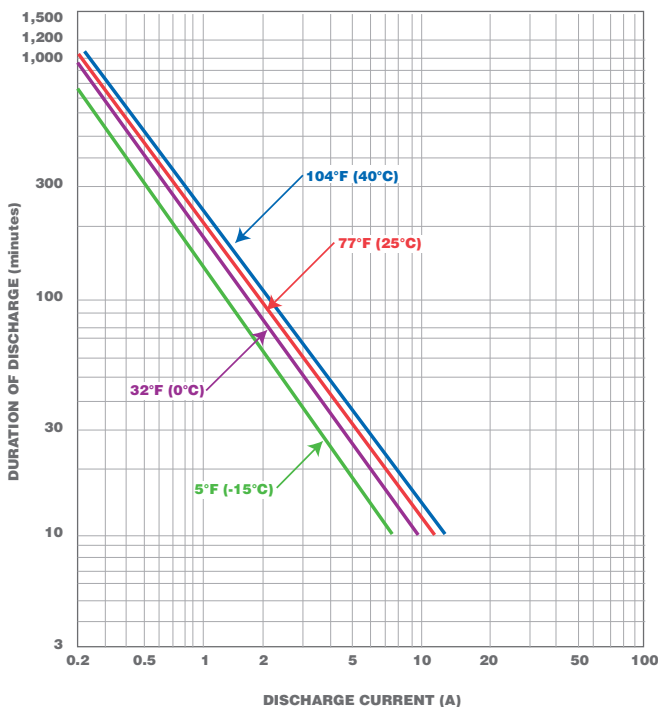

Features & Benefits

- High quality and reliability
- Exceptional deep discharge recovery
- No corrosive gas generation
- Long service life
- Quick chargeability
- High power density
- Maintenance-free operation

Specifications

Nominal Voltage:	12V		
Weight:	1.30 kg		
Standard Terminals & Resin	UL94 V-0 Faston 250		
Capacity 77°F (25°C) (9.6V cutoff):	30 min. rate	57W	
	15 min. rate	91W	
	10 min. rate	120W	
	5 min. rate	180W	
Internal Resistance:	Fully charged battery	Approx. 35mΩ	
Temperature dependency of capacity (20 hour rate):	104°F (40°C)	102%	
	77°F (25°C)	100%	
	32°F (0°C)	85%	
	5°F (-15°C)	65%	
Self discharge 77° (25°C):	Residual capacity after standing 3 mos.	91%	
	Residual capacity after standing 6 mos.	82%	
	Residual capacity after standing 12 mos.	64%	
Charge Method (Constant Voltage):	Trickle use	Initial current	0.6A or smaller
		Control Voltage	13.6V to 13.8V (per 12V cell 25°C)

Discharge Characteristics 77°F (25°C)

