



TOP VIEW

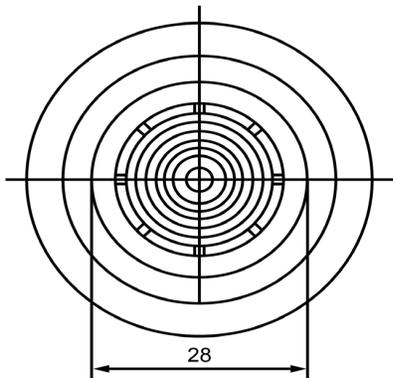


SIDE VIEW (1)

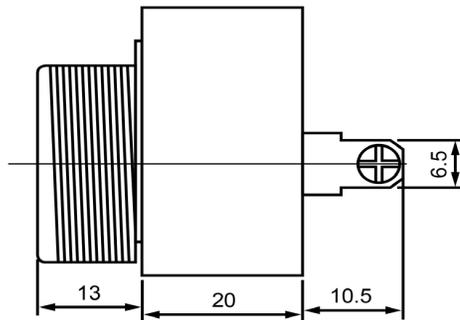

SIDE VIEW (2)



BOTTOM VIEW

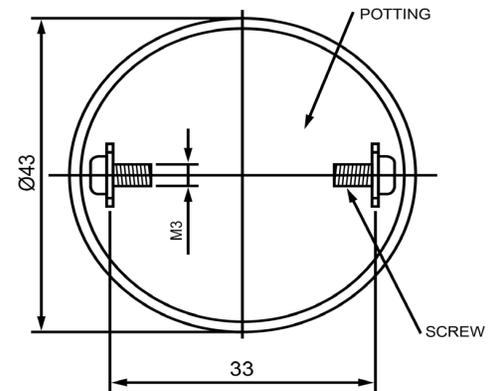

Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description		Date	Approved			
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S			
Resonant Frequency	2,800	(Hz)									
Rated Voltage	12	(V)									
SPL @ 10cm	97	(dBA)									
Tone	Single										
Mount Type	Panel Mount										
Voltage Range	4 ~ 28	(V)									
Max Rated Current	8	(mA)									
Housing Material	ABS										
Operating Temperature	-20 ~ +60	°C									
Storage Temperature	-30 ~ +70	°C									
Weight	43	(g)									
 DB UNLIMITED			 Piezo Indicator			IP432812-2					
				Drawn by	Date	Checked by	Date	Approved by	Date		
				A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013		

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.