


CONNECTOR 1

- 1. CONNECTOR 1 : 854-004-203RLS4, MOLDED STRAIGHT HOOD, COLOR BLACK
- 2. WIRE: 26AWG, 2 1/2 TWISTED PAIRS, UL20276, FOIL/BRAID/DRAIN SHIELD, COLOR BLACK, 30V
- 3. CABLE DIAMETER: 4.60mm±0.15mm
- 4. SHIFLDING : 360°
- 5. PIN DUT :

### WIRING SCHEMATIC

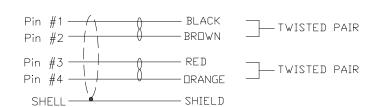

CCA-000-MYYR208

01 = 1 METER ±12.00mm
02 = 2 METERS ±25.00mm
03 = 3 MFTERS ±25.00mm

\*\*SEE PAGE 3 FOR CABLE SPECIFICATIONS

## RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING




THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION


	DATE:	
M. SIGMON		04-14-15

NorComp

			300000	
SCALE:	SHEET	OF		REV
NTS		1	3	4

DWG NO. CCA-000-MYYR208

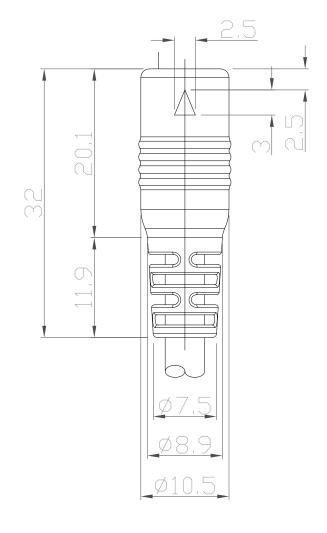

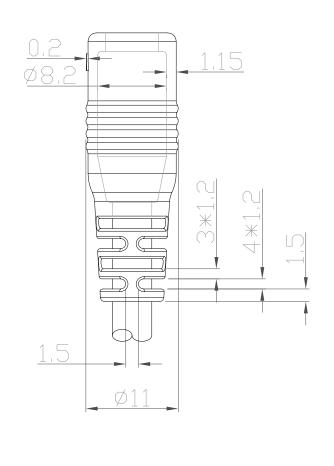

ROHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
M. SIGMON
DATE:
04-14-15

NorComp

CALE:	SHEET		OF			REV
NTS		2		3		4
WG NO.	CCA-	00	0-N	1YY	′R208	

#### ELECTRICAL CHARACTERISTICS


VOLTAGE RATING: 30V TEMPERATURE RATING: 80°C


SPARK TEST: AC-500V/0.15 sec MIN.

DIELECTRIC STRENGTH: AC-750V/1 sec MIN.

INSULATION RESISTANCE: SR-PVC: DC-500V 10 MOHM/KM MIN. AT 20°C

CONDUCTOR RESISTANCE: 26AWG-153 OHM/KM MAX. AT 25°C

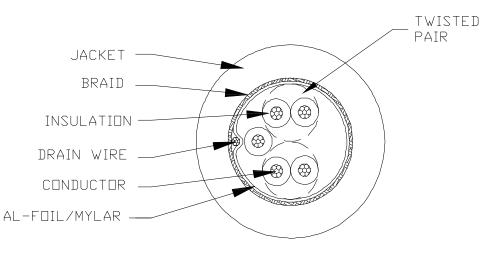



#### COLOR CODE

- 1. BLACK \* BROWN (P570 & P571)
- 2. RED \* ORANGE (P572 & P573)
- 3. YELLOW (574)

# ROHS COMPLIANT

### DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
M. SIGMON
DATE:
04-14-15

NorComp

NTS 3 3 4	
	4
SCALE: SHEET OF REV	EV

CCA-000-MYYR208