

## SUMMARY



Image is for illustrative purpose only

### # Wires

Low voltage 2

Series 0B  
Termination type Female crimp  
IP rating 50  
AWG wire size 24.00 - 20.00  
Cable Ø 0.00 - 0.00 mm  
Status active  
Matching parts [FGG.0B.302.CYCD52](#)

### Download

[Request a quote](#)  
[Eplan](#)  
[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model EG\*: Fixed receptacle, nut fixing  
Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)  
Housing Material Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces  
Weight 5.28 g

### Performance

Configuration 0B.302 : 2 Low Voltage  
Insulator Y: PEEK for crimp contacts  
Rated Current 10 Amps

### Specifications

Contact Type: Crimp  
Contact Retention: 30 N  
Contact Dia.: 0.9 mm (0.035in)  
Bucket Dia.: 1.1 mm (0.043in)  
Min. Conductor: 0.25 mm<sup>2</sup> (AWG 24)  
Max. Conductor: 0.5 mm<sup>2</sup> (AWG 20)  
R (max): 4.8 mOhm  
Vtest (contact-shell): 1200 V (AC), 1700 V (DC)


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Vtest(contact-contact): 1450 V (AC), 2100 V (DC)

## Others

Endurance (Shell): 5000  
Temp (min / max): -55°C / +250°C  
Humidity (max): <=95% [at 60 deg C / 140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]  
Climatical Category: 50/175/21  
Shielding (min): 75 dB (10 MHz)  
Shielding (min): 40 dB (1 GHz)  
Salt Spray Corrosion: >1000 hr

## DRAWINGS

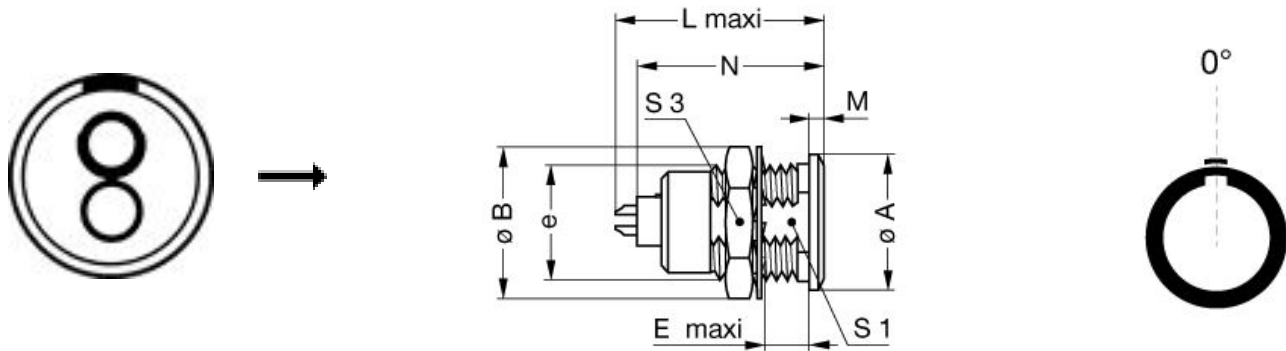

## Dimensions

|     | A    | B    | E    | L    | M    | N    | S1   | S3   | e      |
|-----|------|------|------|------|------|------|------|------|--------|
| mm. | 10   | 12.5 | 7    | 20.7 | 1.2  | 19.1 | 8.2  | 11   | M9x0.6 |
| in. | 0,39 | 0,49 | 0,28 | 0,81 | 0,05 | 0,75 | 0,32 | 0,43 |        |






























## RECOMMENDED BY LEMO

### Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Crimp Tool: [DPC.91.701.V](#)  
 Crimp settings: AWG/Selector = 20-22-24/6-5-5  
 Positionner: [DCE.91.090.BVM](#)  
 Extractor: [DCF.91.090.2LT](#)  
 Replacement contact: EGG.0B.660.ZZM

## Cables

|                    |               |        |   |
|--------------------|---------------|--------|---|
| CMN.02.T20.047PGZE |               | Grey   |    |
| CMN.02.T20.047PNZE |               |        |    |
| CMN.02.T20.048QGZE | TPR (medical) | Grey   |    |
| CMN.02.T28.030PGCE | PVC           | GREY   |    |
| CMN.02.T28.030PGZE |               | Grey   |    |
| CMN.02.T28.030PNCE | PVC           | Black  |    |
| CMN.02.T28.030PNZE |               |        |    |
| 102080             | PVC           | Grey   |   |
| 120184             | PVC           | Black  |     |
| 120240             | PVC           | Black  |    |
| 120250             | PVC           | Grey   |  |
| 120500             | PVC           | Grey   |  |
| 120501             | PVC           | Grey   |  |
| 120751             | PVC           | Grey   |  |
| 20140              | PVC           | Grey   |   |
| 20140              | PVC           | Grey   |   |
| 20141              | PVC           | Grey   |  |
| 20142              | PVC           | Red    |   |
| 20143              | PVC           | Green  |   |
| 20144              | PVC           | Black  |   |
| 20145              | PVC           | Yellow |   |
| 20146              | PVC           | Black  |   |
| 20240              | PTFE          | White  |  |
| 20260              | PVC           | Black  |  |
| 20264              | PVC           | Black  |   |
| 20266              | PVC           | Violet |   |
| 2050               | PVC           | Black  |  |
| 20550              | PUR           | Black  |  |
| 20560              | PUR           | White  |  |
| 2080               | PVC           | Grey   |   |
| 220750             | PVC           | Grey   |  |

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

|      |      |       |   |
|------|------|-------|---|
| 2221 | PVC  | Black |   |
| 2260 | PTFE | White |  |
| 2280 | PVC  | Black |  |
| 4082 | PVC  | Grey  |   |

|                   |     |       |  |
|-------------------|-----|-------|--|
| CCX.50.RG1.74U30B | TFE | White |  |
| CMB.02.210.635    | PUR | Black |  |

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*