



**Electrical specifications**

**Center Frequency:** 5344 MHz  
**Insertion loss over Passband:** <0.7 dB  
**Passband:** 5104-5584 MHz  
**Return loss over passband:** >14 dB  
**Rejection 1:** >40 dB@4176 MHz  
**Rejection 2:** >40 dB@6400 MHz  
**Rejection 3:** >70 dB@2784 MHz  
**Rejection 4:** >70 dB@7680 MHz


**Mechanical**

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** SMA female,  
**Dimensions:** 1.90" x 0.62" x 0.50" in

**Environmental**

**Operating Temperature:** -45 to +85° C  
**Storage Temperature:** -55 to +95° C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200 MHz


**Outline Drawing:**

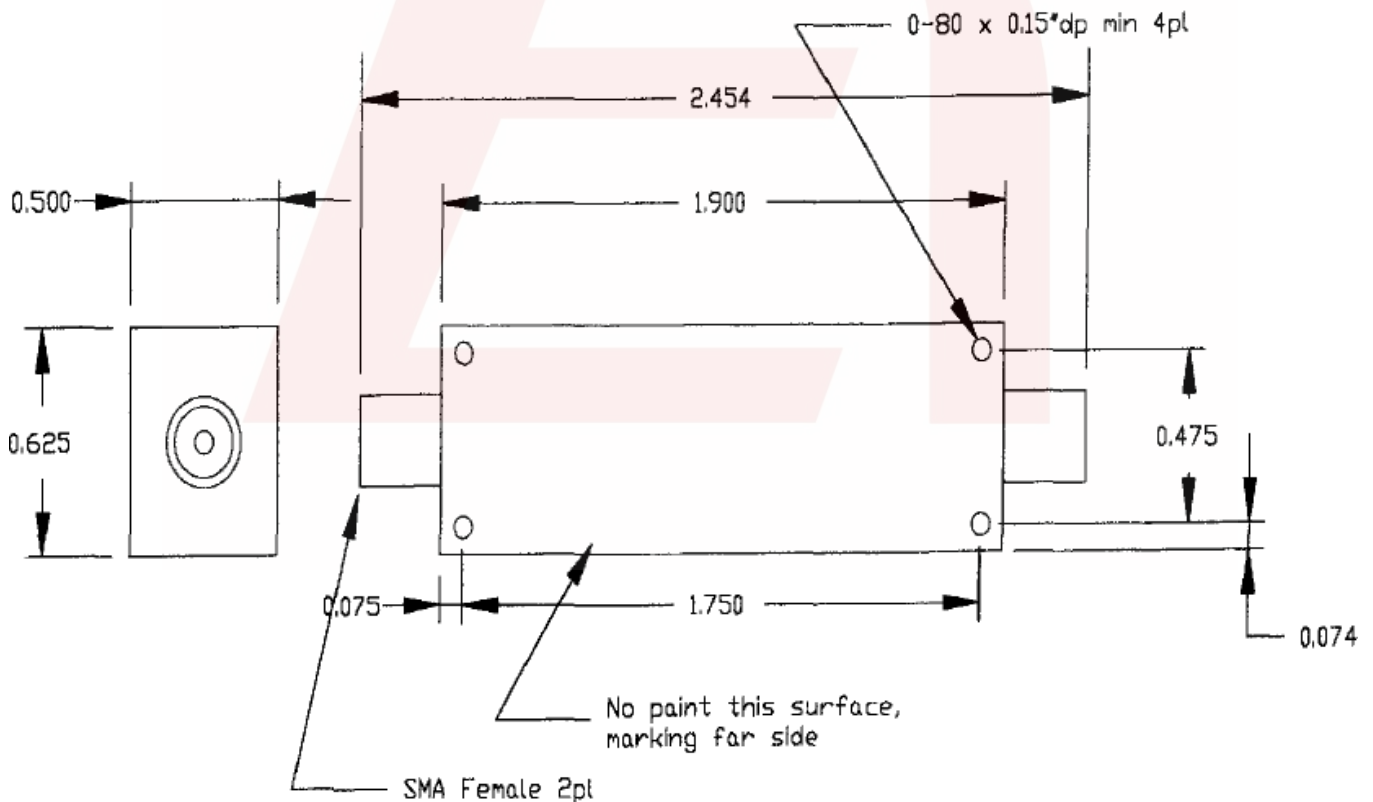



### Response Plot:

7/25/2022 9:13:06 AM

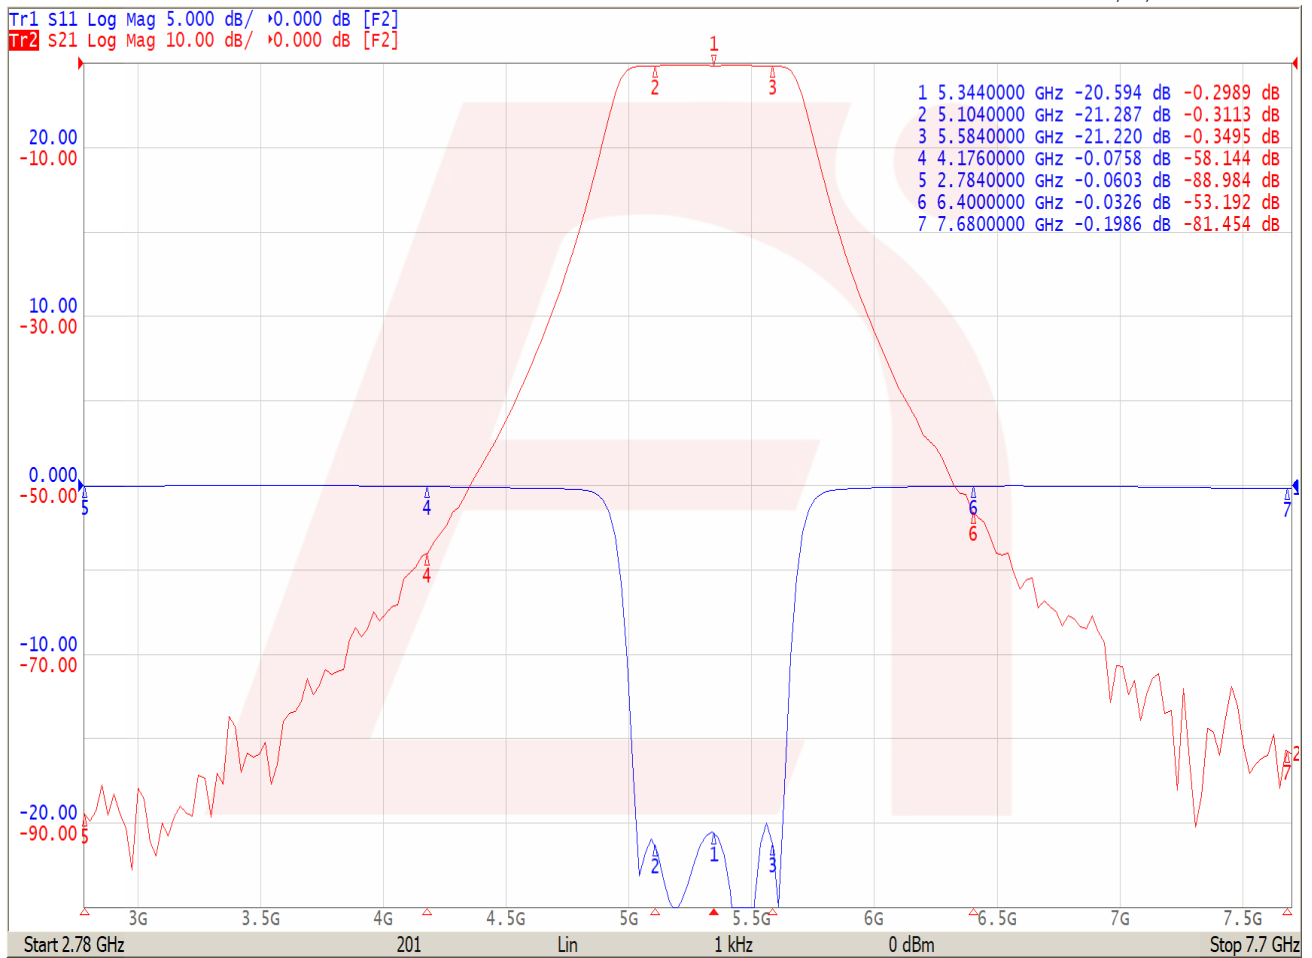

DS-B883-03152018-Rev1