

à la mods.

PWRZ19373

10W DC-to-DC Power Supply

User Guide

Revision History

REV	DATE	DESCRIPTION
0	June, 2020	Initial release

Disclaimers

Information in this document is subject to change without notice and does not represent a commitment on the part of Made Systems, LLC. Made Systems provides this document “as is,” without warranty, expressed or implied, including, but not limited to, the implied warranties of fitness or merchantability for a particular purpose. Made Systems may make improvements, updates and/or changes in this manual or in the product and/or program(s) described in this manual at any time.

Copyright and Trademarks

© 2020 Made Systems, LLC. All rights reserved.

à la mods and the à la mods logo are trademarks in the United States property of Made Systems, LLC. All other trademarks mentioned in this document are the property of their respective owners.

Support

Contact à la mods technical support through our website at www.alamods.com/support.html

Warranty

The à la mods product warranty can be obtained from the website at www.alamods.com/documents/warranty.html

Contents

Table of Contents

- Revision History2**
- Disclaimers2**
- Copyright and Trademarks.....2**
- Support2**
- Warranty2**
- Contents3**
- Introduction5**
- Mechanical Specifications 6**
- Electrical Specifications..... 7**
- Hardware Configuration Options..... 8**
 - Push Button I/O 8
 - System LED 8
- I/O Pinouts 9**
 - GPIO Header – 40 Pin 9
 - Remote Push Button I/O 10
 - Auxiliary Power Bus..... 11
 - Power In..... 11
- Module Operation 12**
 - Setup..... 12
 - Operation 12

List of Tables

Table 1	Electrical Operating Characteristics	7
Table 2	40 Pin GPIO Header Pin Assignments	9
Table 3	Auxiliary Power Bus (APB)	11
Table 4	Power Input Connector	11

List of Figures

Figure 1	PWRZ19373 Overview.....	5
Figure 2	Mechanical Dimensions (mm)	6

Introduction

The à la mods PWRZ19373 is a 10W DC-DC power supply based upon a switch-mode design for high efficiency, consistent power to a Raspberry Pi or à la mods stack of modules connected to a Raspberry Pi.

It supports a wide input voltage range from 7.5 to 36 Vdc to accommodate many different industrial environments.

It can be stacked at any level in a tower of à la mods modules or power a single Raspberry Pi. A standard barrel jack is used as the input connection which is supported by most AC/DC wall adapter power supplies.

There is a status LED that is connected to GPIO25 of the 40 pin GPIO header that can be controlled directly from the host computer. And a momentary push button switch connected to GPIO21.

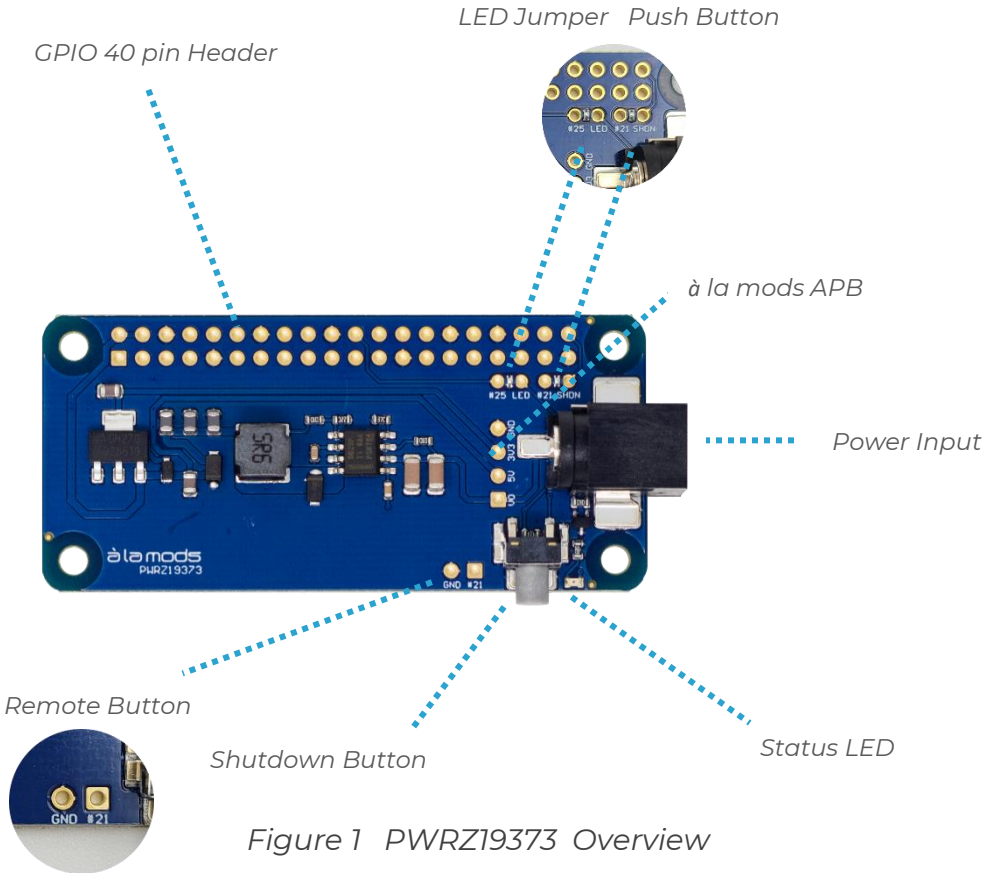


Figure 1 PWRZ19373 Overview

Mechanical Specifications

The à la mods “Z” series modules are all compatible with the Raspberry Pi® Zero form factor and are designed to be stacked onto the Raspberry Pi® or EMBDZ19121 Embedded Host Microcontroller.

NOTE: *GPIO 40 pin and Auxiliary Power Bus (APB) 4 pin headers are double stacking.*

Use 17 mm M2.5 standoff with double stacking headers

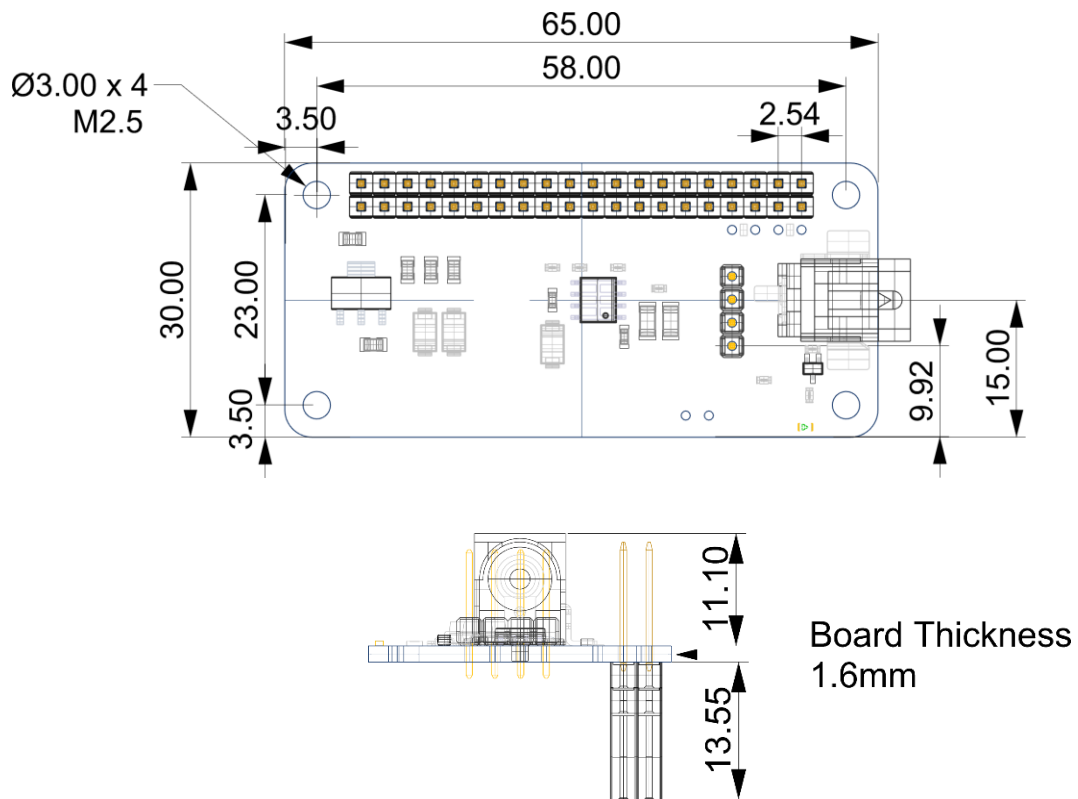


Figure 2 Mechanical Dimensions (mm)

Electrical Specifications

The à la mods PWRZ19373 module is designed to be electrically compatible with the Raspberry Pi® 40 pin GPIO header power.

Table 1 Electrical Operating Characteristics

PARAMETER	PERFORMANCE			UNIT
	<i>Min</i>	<i>Typ</i>	<i>Max</i>	
Input Vin	7.5		36	V
Input Current			1.67	A
Output Voltage 5V0	4.75	5.0	5.25	V
Output Current 5V0			2.0	A
Output Voltage 3V3	3.14	3.3	3.47	V
Output Current 3V3			800	mA
Output Voltage Vo	7.5		36	V
Output Current Vo			3.0	A
Operating Temperature	-40		+85	°C

Hardware Configuration Options

Push Button I/O

This is configuration jumper for the pushbutton on the power supply. By default, it is connected to GPIO21, but can be disconnected or jumpered to other I/O lines.

Default: bridged



System LED

This is a configuration jumper for the Status LED on the power supply. The LED can be controlled from the processor via the connected GPIO pin.

Default: GPIO pin 22 (GPIO25).



I/O Pinouts

Specific I/O pins of the 40 pin header are used by default for the Status LED and push button switch.

These pin assignments can be easily modified without cutting PCB traces by simply removing the solder bridges of the individual default control signals and providing a jumper from the control signal to a different GPIO line.

GPIO Header – 40 Pin

Table 2 40 Pin GPIO Header Pin Assignments

PIN	DIRECTION	NAME	DESCRIPTION
1	Power	3V3	3.3 Volt power from host processor
2	Power	5V0	5.0 Volt power
3	-	-	unused
4	Power	5V0	5.0 Volt power
5	-	-	unused
6	Power	GND	GND
7	I/O	-	unused
8	-	-	unused
9	Power	GND	GND
10	-	-	unused
11	I/O	-	unused
12	I/O	-	unused
13	I/O	-	unused
14	Power	GND	GND
15	I/O	-	unused
16	I/O	-	unused
17	Power	3V3	3.3 Volt power from host processor
18	I/O	-	unused
19	-	-	unused
20	Power	GND	GND

21	-	-	unused
22	I/O	Status LED	GPIO25 configured as output
23	-	-	unused
24	I/O	-	unused
25	Power	GND	GND
26	I/O	-	unused
27	-	-	unused
28	-	-	unused
29	I/O	-	unused
30	Power	GND	GND
31	I/O	-	unused
32	I/O	-	unused
33	I	-	unused
34	Power	GND	GND
35	I/O	-	unused
36	I	-	unused
37	O	-	unused
38	O	-	unused
39	Power	GND	GND
40	I/O	Push Button	GPIO21 configured as input

Remote Push Button I/O

A remote push button switch can be supported by soldering wires to the two I/O pins at the front edge of the module and connected them to a switch.



Auxiliary Power Bus

Table 3 Auxiliary Power Bus (APB)

PIN	DIRECTION	NAME	DESCRIPTION
1	PWR	GND	Common Ground
2	PWR	3V3	3.3 Vdc
3	PWR	5V0	5.0 Vdc
4	PWR	V _o	Connected directly to V _{in}



Power In

Table 4 Power Input Connector

TYPE	SIZE	POLARITY
Barrel	5.5 mm x 2.1 mm	Center Positive

Module Operation

Setup

The power supply will function without any setup. The Status LED and push button switch require I/O configuration before they can be used.

Using the default setup, the host computer must setup the I/O pins as follows:

- Pin 22 Output (Status LED)
- Pin 40 Input (push button switch)

Operation

Setting pin 22 to a logic high value will turn the Status LED on.

Reading a logic low (0) on input 40 indicates the push button is pushed and active.