

DATA CENTRE CO-LOCATION CABINET

APPLICATION:

Hammond's Co-location Rack Cabinet features four (4) different bay configurations. Whether you are leasing the space or want to restrict access to sections of your cabinet, the Hammond CL Series is loaded with innovative features.

FEATURES:

- One single frame allows multiple bay configurations. Mounting space includes:
 - 1-Bay = 44U, 2-Bay = 21U, 3-Bay = 14U, 4-Bay = 10U
- Standard available configurations available in 36" and 42" depths.
- Vented shelves include rear removable panels for vertical PDU installations.
- Front and Rear Perforated Doors with 65% air flow.
- Doors include 4-pin combination lock with key override.
- Vertical Cable Managers can be installed either top or bottom. Designed to accommodate sliding rail mount kit on servers.
- Cabinet top includes removable top panel and provisions for containment system and cable trough accessories.

SPECIFICATIONS:



- 14-gauge welded steel frame; 16-gauge doors and side panel.
- Adjustable depth EIA-Compliant Adjustable depth mounting rails.
 - Available as Square Hole or Tapped (10-32) mounting rail.
- Recommended maximum weight load tested for 1,800 lbs.

FINISH:


- Rugged textured black powder paint

ADDITIONAL ACCESSORIES:


- Third set of rails can easily be added with either 10-32 taps or square holes.
- Security upgrade kit ensures entire cabinet is tamper-proof (see reverse).
- Bay upgrade kit divides a single bay into a 2, 3 or 4 bay cabinet (see reverse).
- Right-hand door hinge kit.

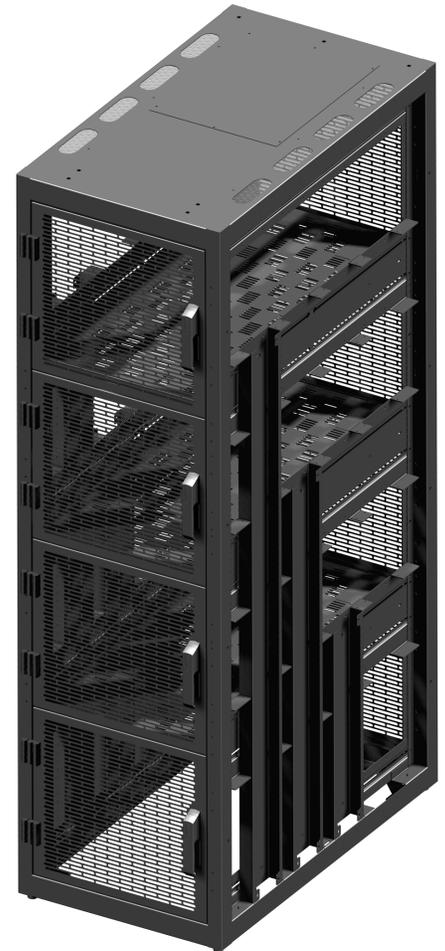

**To remove doors;
open and lift off.**



**Vertical Cable
Management can
easily be moved to
top or bottom.**



**Easily remove
cover panels
to install a
vertical PDU.†**



**One frame fits all
bay configurations.
Easily pass cables
between cabinets.**

DATA CENTRE CO-LOCATION CABINET

Use this chart to select your desired parts below. You may prefer to visit www.q-assembly.com and build your preferred solution online.				1 Bay (44U)	2 Bay (21U)	3 Bay (14U)	4 Bay (10U)
Step 1	Overall Dimensions 24" (W) x 83.4" (H)	Co-Location Frame is compatible with all bay configurations. In addition, the CL Frame can be used with the hot/cold aisle containment panels.	36" deep	<input type="checkbox"/> CLF244436BK	<input type="checkbox"/> CLF244436BK	<input type="checkbox"/> CLF244436BK	<input type="checkbox"/> CLF244436BK
			42" deep	<input type="checkbox"/> CLF244442BK	<input type="checkbox"/> CLF244442BK	<input type="checkbox"/> CLF244442BK	<input type="checkbox"/> CLF244442BK
Step 2 19" Mounting Rails	19" Tapped 10-32 Rails (Pair)			<input type="checkbox"/> CLTR44U	<input type="checkbox"/> CLTR21U	<input type="checkbox"/> CLTR14U	<input type="checkbox"/> CLTR10U
	19" Square Hole Rails (Pair)			<input type="checkbox"/> CLSR44U	<input type="checkbox"/> CLSR21U	<input type="checkbox"/> CLSR14U	<input type="checkbox"/> CLSR10U
Step 3 Side Panels	Solid Side Panels (Each)		36" deep	<input type="checkbox"/> CLSP4436BK (Compatible with all bay configurations)			
	Solid Side Panels (Each)		42" deep	<input type="checkbox"/> CLSP4442BK (Compatible with all bay configurations)			
Step 4 Internal Kit	Each kit contains the doors, cable managers and bay shelves.		36" deep	<input type="checkbox"/> CL1B36KIT	<input type="checkbox"/> CL2B36KIT	<input type="checkbox"/> CL3B36KIT	<input type="checkbox"/> CL4B36KIT
			42" deep	<input type="checkbox"/> CL1B42KIT	<input type="checkbox"/> CL2B42KIT	<input type="checkbox"/> CL3B42KIT	<input type="checkbox"/> CL4B42KIT
Step 5 Top Panel	Solid Top Panel			<input type="checkbox"/> C2T1923SBK1 (Compatible with all bay configurations)			
	Vented Top Panel			<input type="checkbox"/> C2T1923VBK1 (Compatible with all bay configurations)			
Step 6 Bottom Panel	Solid Bottom Panel		36" deep	<input type="checkbox"/> CLB2436 (Compatible with all bay configurations)			
	Solid Bottom Panel		42" deep	<input type="checkbox"/> CLB2442 (Compatible with all bay configurations)			
Step 7	Baying Kit			<input type="checkbox"/> GKIT (Compatible with all bay configurations)			
	Grounding Kit			<input type="checkbox"/> GRDKIT02 (Compatible with all bay configurations)			
	Seismic Bolt-Down Kit			<input type="checkbox"/> C4K-Z4 (Compatible with all bay configurations)			
	Security Upgrade Kit			<input type="checkbox"/> CLSECUPG (Compatible with all bay configurations)			
	Cable Trough			<input type="checkbox"/> CLTROUGH (Compatible with all bay configurations)			
	Right-hand door hinge kit.			<input type="checkbox"/> CLRHNG (Compatible with all bay configurations)			
	† PDU Semi-Toolless Mount Bracket			<input type="checkbox"/> PDU44U (Compatible with all bay configurations)			

Your **QUICK & EASY** configuration tool is just a **click** away!



Build your own assembly at: www.q-assembly.com