

## Electronic housing - HCS-C MINI 1W 3AAA 1 1 7035 - 2203152

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Handheld housing, C-Mini, light gray, consisting of two half shells, two front plates, screws. Front 1.1 mm recessed, with window and keypad slot, battery compartment cover and battery contacts for 3 AA batteries

### Your advantages

- ✔ Item is from the HCS product range
- ✔ Suitable for handheld devices
- ✔ Ergonomic straight or staggered housing design
- ✔ Integration of LCD displays and membrane keypads
- ✔ Degree of protection: up to IP54
- ✔ Temperature range: -20 °C to +50 °C
- ✔ Shock-resistant ABS plastic
- ✔ Flammability rating UL 94-V0

### Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 377056
GTIN	4055626377056

### Technical data

#### Item properties

Type	HCS-C MINI 1W 3AAA 1 1 7035
Order No.	2203152
Housing type	Handheld housing
Type	straight
Battery compartment	3 x AAA

#### Measurements

Caption	Schematic representation – for additional information, see product range drawing in the Download Center
---------	---

# Electronic housing - HCS-C MINI 1W 3AAA 1 1 7035 - 2203152

## Technical data

### Measurements

Width [ w ]	70.5 mm
Height [ h ]	110 mm
Depth [ d ]	26 mm
Diagonal	2.8 in. (Window for display)
Dimensions	60.5 mm x 56 mm x 1.1 mm (Recessed area on front)
	44 mm x 23.4 mm (Window for display)
Front with faceplate	top, 1 x (49.8 mm x 17.8 mm)
	bottom, 1 x (49.8 mm x 17.8 mm)

### Material specifications

Color (RAL)	light gray (7035)
Flammability rating according to UL 94	V0
Housing material	ABS

### Hammer test

Specification	IEC 60068-2-75:2014-09
Impact energy	0.7 J
Number of drop cycles	5

### Thermostability (ball thrust test)

Specification	IEC 60695-10-2:2014-02
Temperature	80 °C
Test duration	1 h
Force	20

### Test for assessing the risk of fire (glow wire)

Specification	IEC 60695-2-11:2014-02
Temperature	850 °C
Time of exposure	30 s

### Packaging information

Pieces per package	1
Denomination packing units	Pcs.


### Standards and regulations

Flammability rating according to UL 94	V0
--	----

## Drawings

## Electronic housing - HCS-C MINI 1W 3AAA 1 1 7035 - 2203152

Dimensional drawing

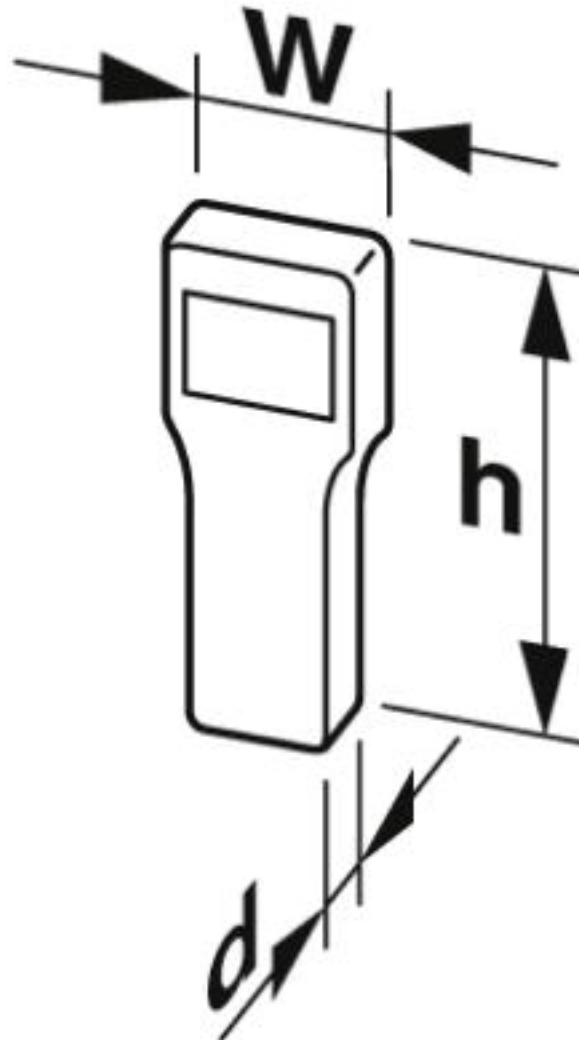

Schematic representation – for additional information, see product range drawing in the Download Center

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>