

Product Change Notice (PCN)

Date: **3/9/2023**

PCN Number: **PCN-0454846R-01**

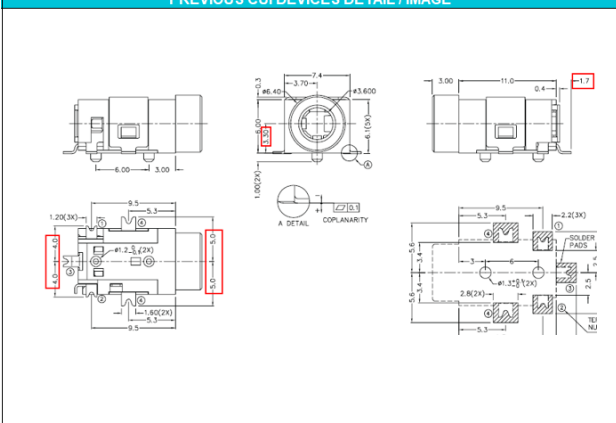
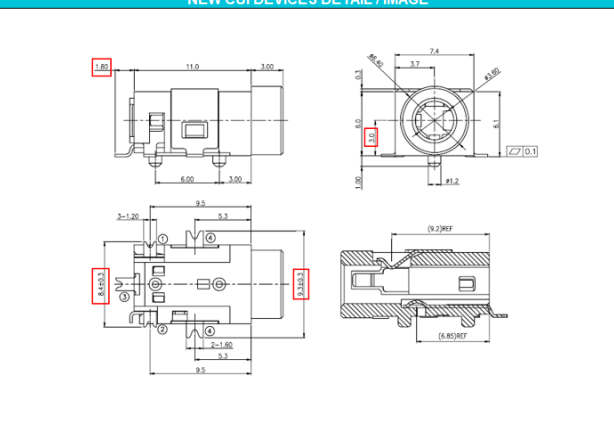
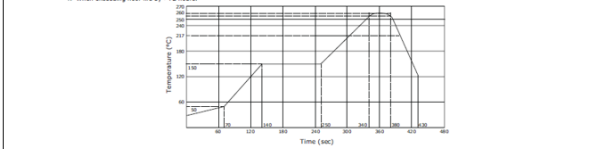
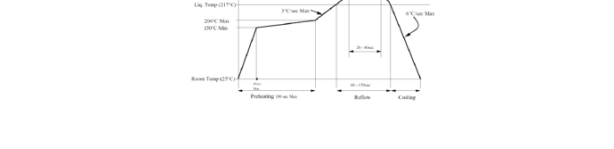
To Our Customers:

We appreciate your use of our products. Our commitment in maintaining and improving processes is demonstrated by plans to enhance our product quality, reliability, and manufacturability. The purpose of this notice is to inform you of a product change.

Product(s) Affected: **SJ2-3594A-SMT-TR**

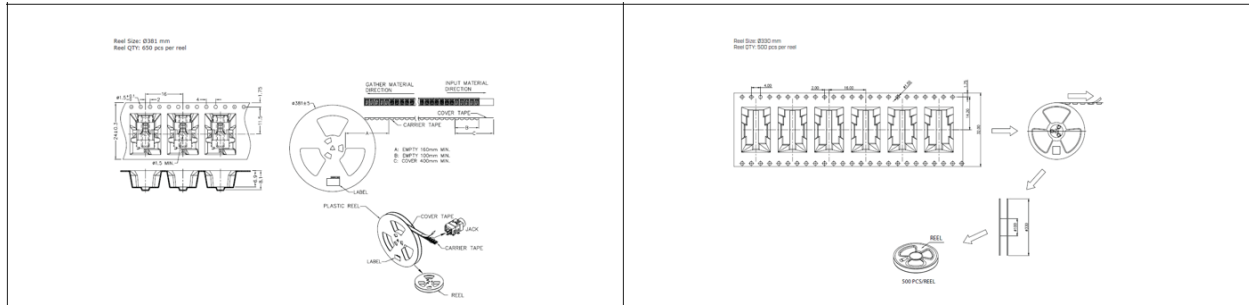
Reason(s) for Change: **Manufacturing process improvements**

Description of Change: mechanical, packaging, electrical, and soldering differences as shown below:

PREVIOUS CUI DEVICES DETAIL / IMAGE	NEW CUI DEVICES DETAIL / IMAGE																																																																																																																																																
																																																																																																																																																	
<p>SPECIFICATIONS</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>rated input voltage</td> <td></td> <td></td> <td>12</td> <td></td> <td>VDC</td> </tr> <tr> <td>rated input current</td> <td></td> <td></td> <td>1</td> <td></td> <td>A</td> </tr> <tr> <td>contact resistance¹</td> <td>between terminal and mating plug</td> <td></td> <td>50</td> <td></td> <td>mΩ</td> </tr> <tr> <td></td> <td>between terminal in a closed circuit</td> <td></td> <td>30</td> <td></td> <td>mΩ</td> </tr> <tr> <td>insulation resistance</td> <td>at 500 Vdc</td> <td>100</td> <td></td> <td></td> <td>MΩ</td> </tr> <tr> <td>voltage withstand</td> <td>for 1 minute</td> <td></td> <td>500</td> <td></td> <td>Vac</td> </tr> <tr> <td>insertion/withdrawal force</td> <td></td> <td>0.3</td> <td>3</td> <td></td> <td>kg</td> </tr> <tr> <td>operating temperature</td> <td></td> <td>-25</td> <td>85</td> <td></td> <td>°C</td> </tr> <tr> <td>life</td> <td>at a rate of 24 cycles/minute</td> <td></td> <td>5,000</td> <td></td> <td>cycles</td> </tr> <tr> <td>flammability rating</td> <td>UL94V-0</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>RoHS</td> <td>yes</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>Notes: 1. When measured at a current of less than 100 mA/1 kHz. 2. All specifications measured at 10-35°C humidity at 45-85% under standard atmospheric pressure, unless otherwise noted.</p>	parameter	conditions/description	min	typ	max	units	rated input voltage			12		VDC	rated input current			1		A	contact resistance ¹	between terminal and mating plug		50		mΩ		between terminal in a closed circuit		30		mΩ	insulation resistance	at 500 Vdc	100			MΩ	voltage withstand	for 1 minute		500		Vac	insertion/withdrawal force		0.3	3		kg	operating temperature		-25	85		°C	life	at a rate of 24 cycles/minute		5,000		cycles	flammability rating	UL94V-0					RoHS	yes					<p>SPECIFICATIONS</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>rated input voltage</td> <td></td> <td></td> <td>30</td> <td></td> <td>VDC</td> </tr> <tr> <td>rated input current</td> <td></td> <td></td> <td>1</td> <td></td> <td>A</td> </tr> <tr> <td>contact resistance¹</td> <td>between terminal and mating plug</td> <td></td> <td>100</td> <td></td> <td>mΩ</td> </tr> <tr> <td></td> <td>between terminal in a closed circuit</td> <td></td> <td>30</td> <td></td> <td>mΩ</td> </tr> <tr> <td>insulation resistance</td> <td>at 500 Vdc</td> <td>100</td> <td></td> <td></td> <td>MΩ</td> </tr> <tr> <td>voltage withstand</td> <td>for 1 minute</td> <td></td> <td>500</td> <td></td> <td>Vac</td> </tr> <tr> <td>insertion/withdrawal force</td> <td></td> <td>0.3</td> <td>3</td> <td></td> <td>kg</td> </tr> <tr> <td>operating temperature</td> <td></td> <td>-25</td> <td>85</td> <td></td> <td>°C</td> </tr> <tr> <td>life</td> <td></td> <td></td> <td>5,000</td> <td></td> <td>cycles</td> </tr> <tr> <td>flammability rating</td> <td>UL94V-0</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>RoHS</td> <td>yes</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	parameter	conditions/description	min	typ	max	units	rated input voltage			30		VDC	rated input current			1		A	contact resistance ¹	between terminal and mating plug		100		mΩ		between terminal in a closed circuit		30		mΩ	insulation resistance	at 500 Vdc	100			MΩ	voltage withstand	for 1 minute		500		Vac	insertion/withdrawal force		0.3	3		kg	operating temperature		-25	85		°C	life			5,000		cycles	flammability rating	UL94V-0					RoHS	yes				
parameter	conditions/description	min	typ	max	units																																																																																																																																												
rated input voltage			12		VDC																																																																																																																																												
rated input current			1		A																																																																																																																																												
contact resistance ¹	between terminal and mating plug		50		mΩ																																																																																																																																												
	between terminal in a closed circuit		30		mΩ																																																																																																																																												
insulation resistance	at 500 Vdc	100			MΩ																																																																																																																																												
voltage withstand	for 1 minute		500		Vac																																																																																																																																												
insertion/withdrawal force		0.3	3		kg																																																																																																																																												
operating temperature		-25	85		°C																																																																																																																																												
life	at a rate of 24 cycles/minute		5,000		cycles																																																																																																																																												
flammability rating	UL94V-0																																																																																																																																																
RoHS	yes																																																																																																																																																
parameter	conditions/description	min	typ	max	units																																																																																																																																												
rated input voltage			30		VDC																																																																																																																																												
rated input current			1		A																																																																																																																																												
contact resistance ¹	between terminal and mating plug		100		mΩ																																																																																																																																												
	between terminal in a closed circuit		30		mΩ																																																																																																																																												
insulation resistance	at 500 Vdc	100			MΩ																																																																																																																																												
voltage withstand	for 1 minute		500		Vac																																																																																																																																												
insertion/withdrawal force		0.3	3		kg																																																																																																																																												
operating temperature		-25	85		°C																																																																																																																																												
life			5,000		cycles																																																																																																																																												
flammability rating	UL94V-0																																																																																																																																																
RoHS	yes																																																																																																																																																
<p>SOLDERABILITY</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>reel storage</td> <td>at relative humidity <80%</td> <td></td> <td>40</td> <td></td> <td>°C</td> </tr> <tr> <td>reflow soldering¹</td> <td>see reflow profile</td> <td>255</td> <td>260</td> <td>265</td> <td>°C</td> </tr> <tr> <td>drying conditions⁴</td> <td>parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>Notes: 1. Must reflow solder within 72 hours from opening vacuum packaging at a temperature +30°C & relative humidity <60%. 2. When exceeding floor life by 72 hours.</p> 	parameter	conditions/description	min	typ	max	units	reel storage	at relative humidity <80%		40		°C	reflow soldering ¹	see reflow profile	255	260	265	°C	drying conditions ⁴	parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours					<p>SOLDERABILITY</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>reel storage</td> <td>≤40°C, ≤80% humidity</td> <td></td> <td>255</td> <td>260</td> <td>°C</td> </tr> <tr> <td>reflow soldering</td> <td>see reflow profile</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>Notes: 1. CUI Devices recommends usage of the product within 24 hours after 72h in storage. After 24 hours, CUI Devices recommends drying the parts prior to use.</p> 	parameter	conditions/description	min	typ	max	units	reel storage	≤40°C, ≤80% humidity		255	260	°C	reflow soldering	see reflow profile																																																																																																										
parameter	conditions/description	min	typ	max	units																																																																																																																																												
reel storage	at relative humidity <80%		40		°C																																																																																																																																												
reflow soldering ¹	see reflow profile	255	260	265	°C																																																																																																																																												
drying conditions ⁴	parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours																																																																																																																																																
parameter	conditions/description	min	typ	max	units																																																																																																																																												
reel storage	≤40°C, ≤80% humidity		255	260	°C																																																																																																																																												
reflow soldering	see reflow profile																																																																																																																																																

F-723-001

Revision: A



Affected Date Code: **3/8/23**

Product Availability: **Channel Availability Q2**

Additional Information:

PCN Approval:

Operations/Quality

Roe Adams

Product Management

RH