

6

5

4


3

2


1

D

D

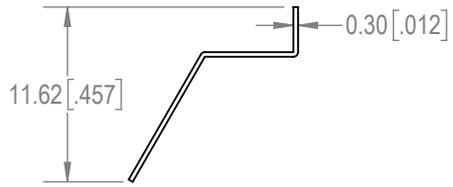


#4-BT OR BF SELF TAPPING THREADS

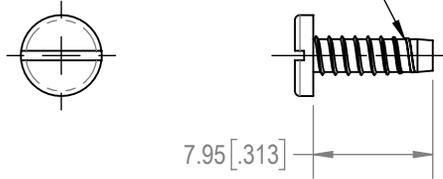

7.95 [.313]


2X MOUNTING SCREWS

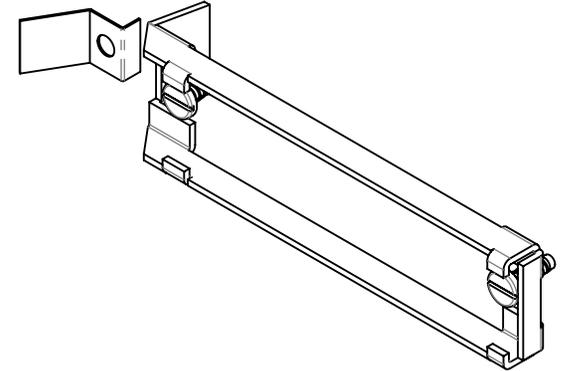

C

C


LOCKARM SPRING




8.53 [.336]

B

B



17.91 [.705] MAX.

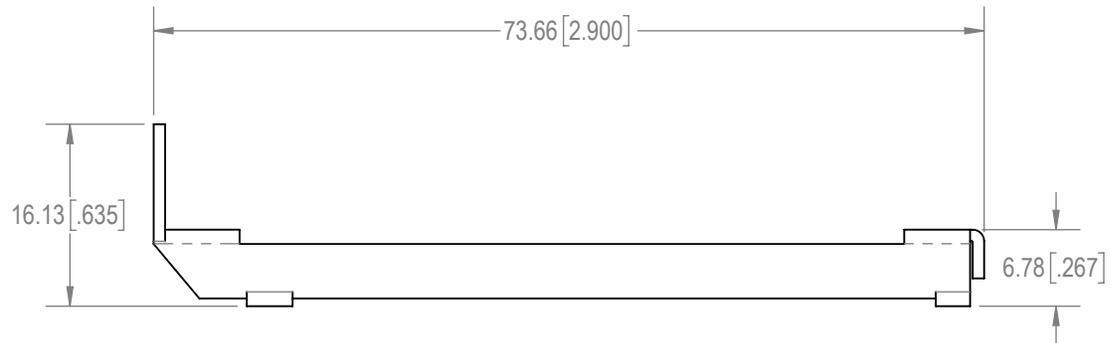

73.66 [2.900]

16.13 [.635]

6.78 [.267]

LOCKARM LEVER

A

A

**NOTES:**

- MATERIALS AND FINISH:  
 LOCKARM: STEEL, NICKEL PLATE.  
 LOCKARM SPRING: BERYLLIUM COPPER, NICKEL PLATE.  
 SCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
- DETAILED PRODUCT, MECHANICAL AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST D-SUB ACCESSORIES PRODUCT PUBLICATION AT [CONNECTPOSITRONIC.COM](http://CONNECTPOSITRONIC.COM).

BY	PNY	CHK	ND	3RD ANGLE	POSITRONIC BELIEVES THE DATA ON THE DRAWING TO BE RELIABLE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.	 <b>Positronic®</b> CONNECTPOSITRONIC.COM	
APR	PA	RELEASED DATE:	2020-10-16				
TOLERANCES				SCALE	PART NUMBER	SERIES	
±0.03mm [.001 INCHES] FOR MALE CONTACT MATING DIAMETERS ±0.08mm [.003 INCHES] FOR CONTACT TERMINATION DIAMETERS ±0.13mm [.005 INCHES] FOR ALL OTHER DIAMETERS ±0.38mm [.015 INCHES] FOR ALL OTHER DIMENSIONS ±5° FOR ALL ANGLES DIMENSION ARE IN MILLIMETERS [INCHES]				NTS			D500000VL0
				TITLE			D500000VL0
CREATED ON:				SHEET	REV		
2020-10-16				SHEET 1 OF 1	A		

6

5

4

3

2

1