



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/24/17	K	UPDATED SPECIFICATION	T.B.	B.S.	
04/12/19	L	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
11/26/19	M	WAS RATED 10AMP. ADDED WIRE LENGTH	T.B.	B.S.	

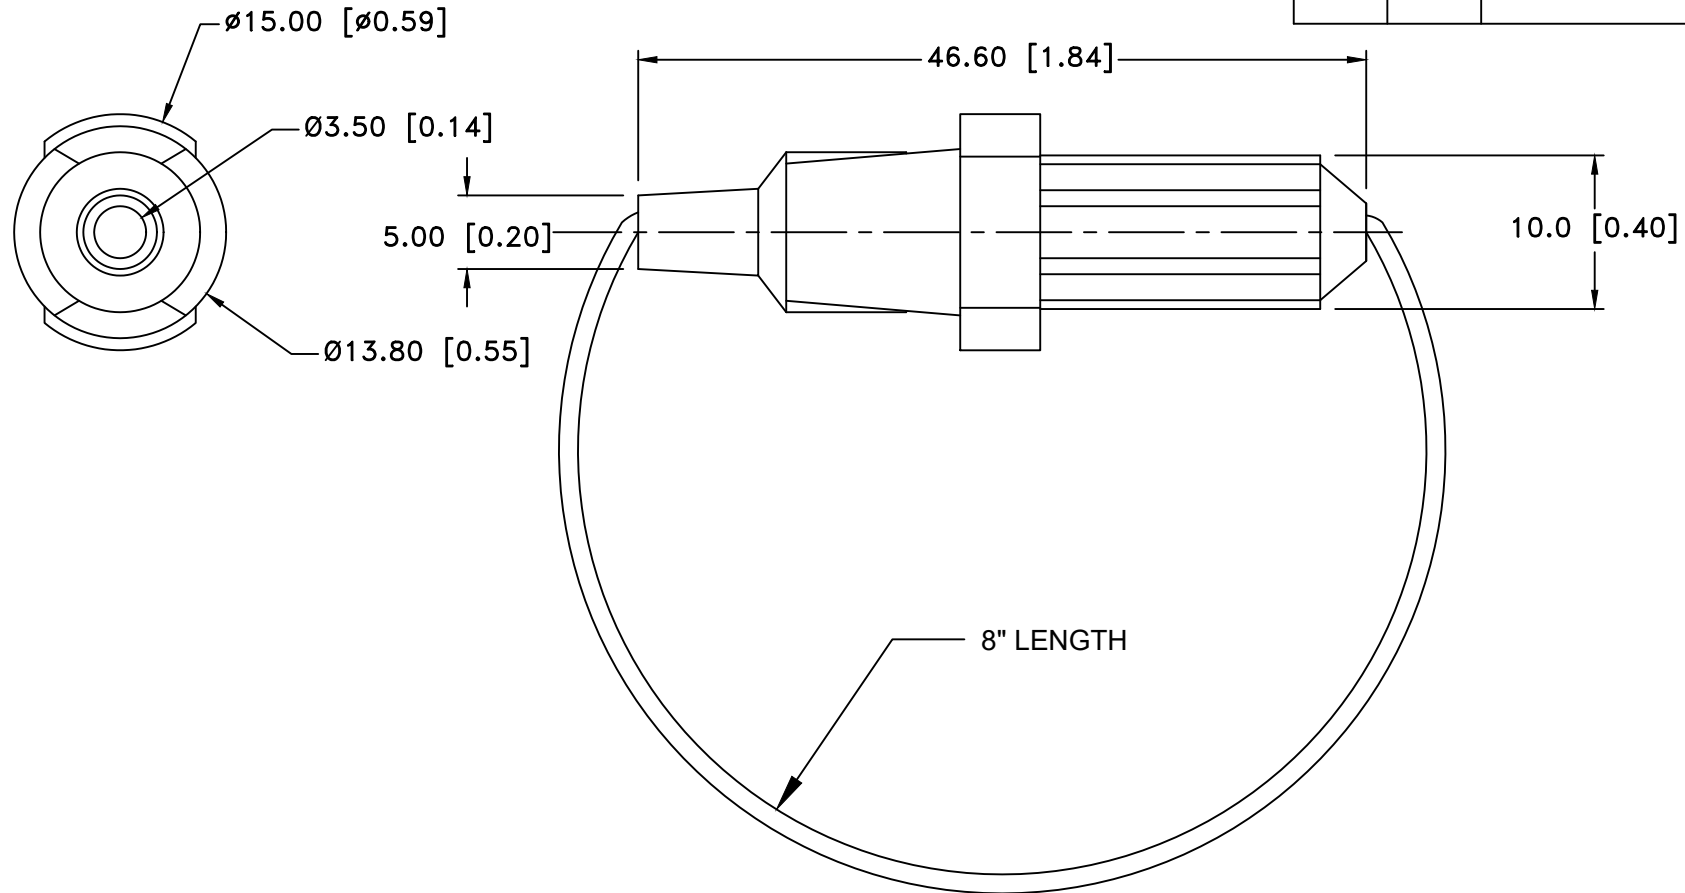

NOTES:

- MATERIAL:  
HOUSING : NYLON 66, UL 94V-2, UL FILE NO. E70062
- LEAD WIRE IN LOOP: 8" OVERALL LENGTH RED WIRE, 16AWG, UL-1015, 600V, 105°C, FLAME RATING VW-1
- RATED CURRENT: 15A
- ACCEPTS GMA/GTE FUSES
- INSULATION RESISTANCE AT 500V DC: 100M Ω MIN
- CONTACT RESISTANCE: 5m Ω AT 1A DC
- DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1500V MIN  
ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title INLINE FUSE HOLDER		
Angular ± 3°	Date 11/26/19	Drawing Number BF303	
		Approved By T.B.	