

## Features

- Small surface mounting type
- Low reverse current and low forward voltage
- High reliability



SOD-523



Schematic Diagram





## Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Limit	Unit
Peak Reverse Voltage	$V_{RM}$	40	V
DC Reverse Voltage	$V_R$	30	V
Mean Rectifying Current	$I_o$	30	mA
Non-Repetitive Peak Forward Surge Current@ $t=8.3\text{ms}$	$I_{FSM}$	200	mA
Power Dissipation	$P_D$	150	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	667	$^\circ\text{C}/\text{W}$
Junction Temperature	$T_J$	125	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-55 to +150	$^\circ\text{C}$


## Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward Voltage	$V_F$	$I_F=1\text{mA}$	-	-	0.37	V
Reverse Current	$I_R$	$V_R=30\text{V}$	-	-	0.5	$\mu\text{A}$
Capacitance between Terminals	$C_T$	$V_R=1\text{V}, f=1\text{MHz}$	-	2	-	pF

## Typical Characteristic Curves

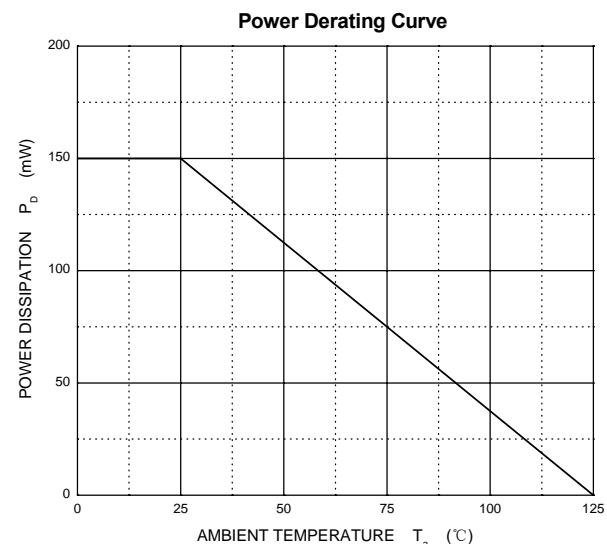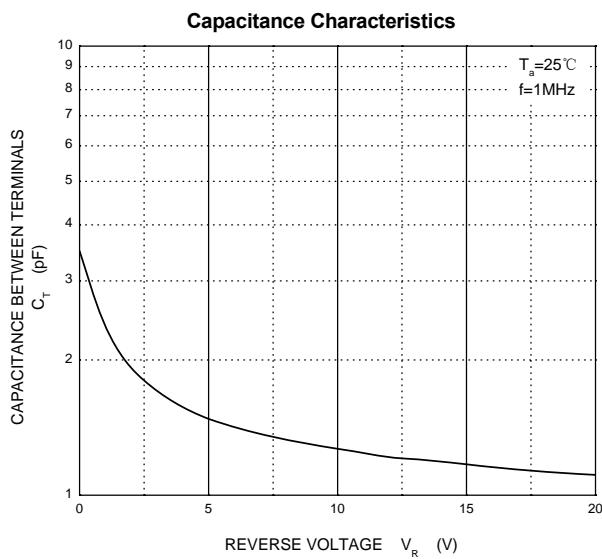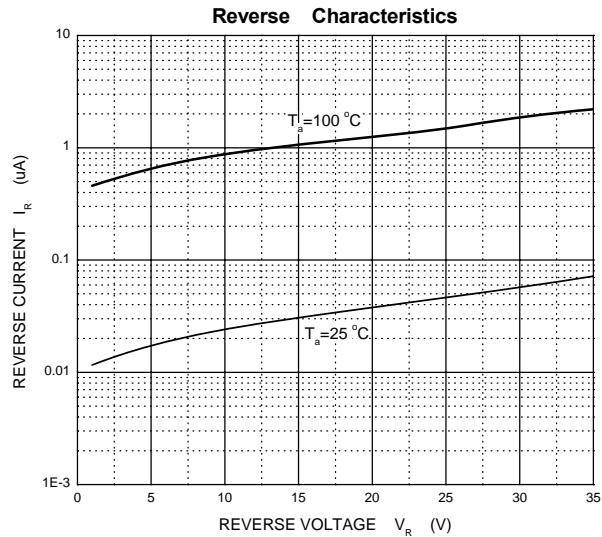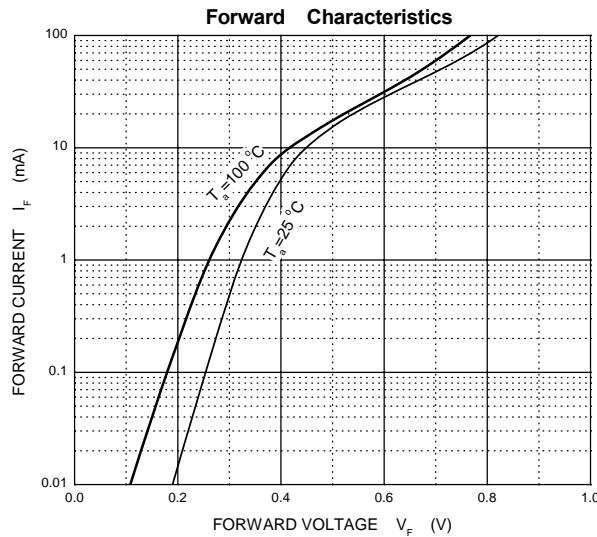


## Package Outline Dimensions SOD-523

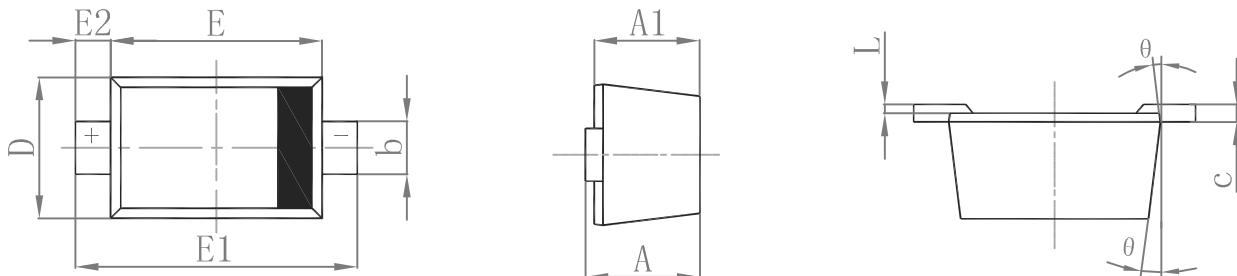

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.510	0.770	0.020	0.031
A1	0.500	0.700	0.020	0.028
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	0.750	0.850	0.030	0.033
E	1.100	1.300	0.043	0.051
E1	1.500	1.700	0.059	0.067
E2	0.200 REF		0.008 REF	
L	0.010	0.070	0.001	0.003
θ	7° REF		7° REF	

## Suggested Pad Layout

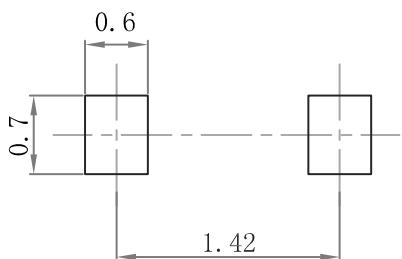

### Note:

1. Controlling dimension:in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$ .
- 3.The pad layout is for reference purposes only.

## Order Information

Device	Package	Marking	Carrier	Quantity	HSF Status
GSRB751S-40	SOD-523	4B	Tape & Reel	8000pcs / Reel	RoHS compliant