




TOP VIEW



SIDE VIEW

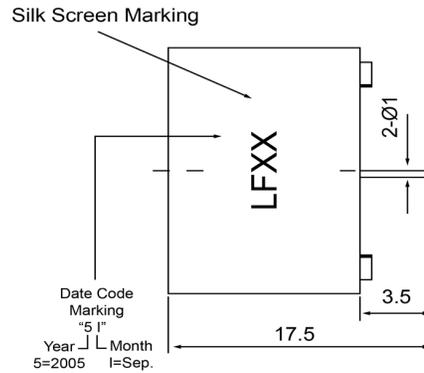

BOTTOM VIEW



Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description		Date	Approved			
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S			
Resonant Frequency	400	(Hz)									
Rated Voltage	9	(V)									
SPL @ 10cm	75	(dBA)									
Tone	Single Tone										
Mount Type	Thru Hole										
Voltage Range	6 ~ 12	(V)									
Max Rated Current	25	(mA)									
Housing Material	ABS										
Operating Temperature	-10 ~ +60	°C									
Storage Temperature	-20 ~ +70	°C									
Weight	10	(g)									
 <b>DB UNLIMITED</b>			 <b>DB UNLIMITED</b>			<b>Electro-Mechanical Indicator</b>			<b>IE220409-1</b>		
						Drawn by	Date	Checked by	Date	Approved by	Date
						A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).