
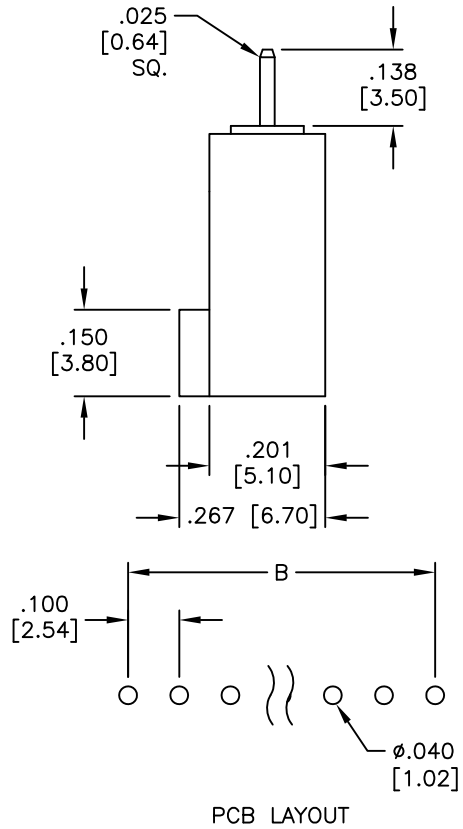
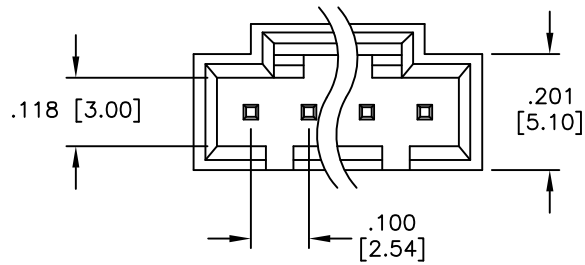


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	
A		REVISED SPEC.	3/15/12	
B		UPDATE DRAWING	1/29/18	AY/KC

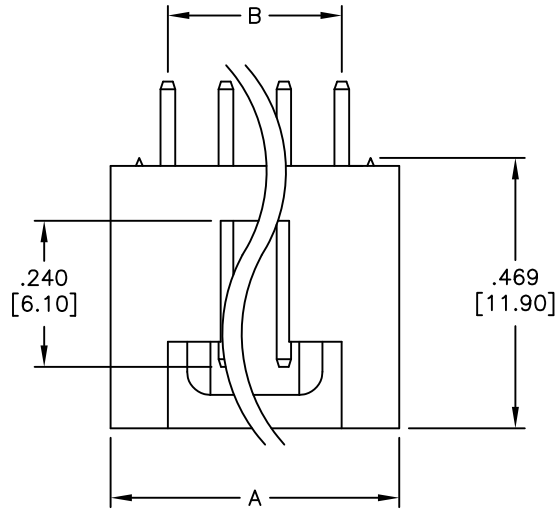

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper alloy
 Plating:
 Tin over Copper underplate overall

Electrical:
A Voltage rating: 250 VAC/DC
 Current rating: 2.5 A
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 600 VAC for 1 minute
 Temperature Rating:
 -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



Positions: 2 thru 18

A = .100 [2.54] x No. of Positions + .100 [2.54]

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH INTERCONNECTS 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS DRAWN SS CHECKED APPROVED		DATE 4/7/05	
TITLE .100 [2.54] LATCHING HEADER STRAIGHT, PCB		SIZE X	PART NO. CDR-XX-TS
REF: S00016T		SCALE: NTS	REV. B SHEET 1 OF 1