
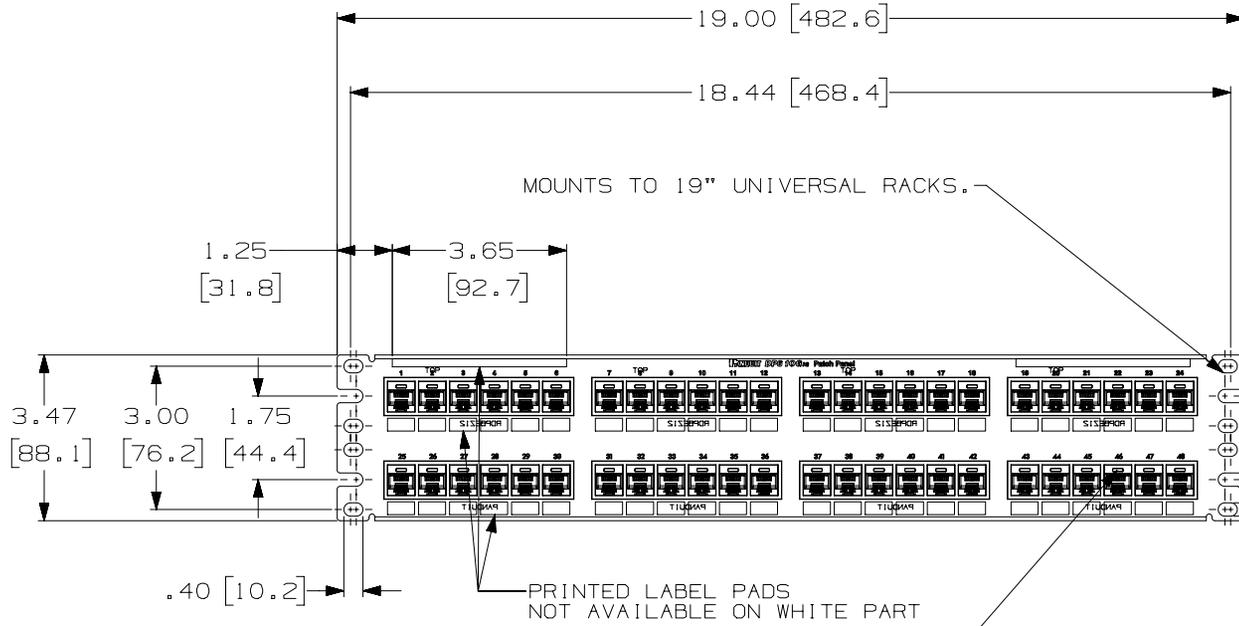


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

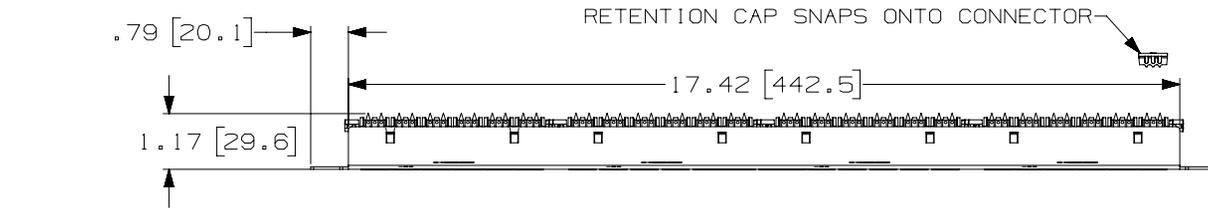

CID\*\*-C, PHONE OR DATA ICON LOCATED HERE, IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

PANDUIT PART NO.	WEIGHT (APPOX.)
DP485E88TGY	2.2 lb (997.9 g)
DP485E88TGWH	2.2 lb (997.9 g)

- NOTES:
- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
  - MATERIAL:  
 PANEL HOUSING: STEEL  
 RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0  
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0  
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B  
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
  - 48 PORT PATCH PANEL 8 POSITION 8 WIRE.
  - THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
  - FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
  - DIMENSIONS IN BRACKETS ARE IN METRIC.
  - USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
  - RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

PART NUMBER <b>DP485E88TGY ; DP485E88TGWH</b>	
TITLE <b>DP5E CATEGORY 5E 48 PORT PATCH PANEL</b>	
CUSTOMER DRAWING	
ITEM REVISION NAME <b>M02479JI/01</b>	<b>PANDUIT</b>
DATASET FILE NAME <b>M02479JI_DC245/01A</b>	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN ( mm ) .x ± .xxx ± .010 ( .3 ) .xx ± .03 ( .8 ) ANGLES ±	
DRAWING NUMBER: <b>02479-245</b>	
DRAWN BY <b>LZ</b>	DATE <b>3-3-06</b>
CHK <b>CEF</b>	SCALE <b>NONE</b>
SHT 1 OF 1	
SIZE <b>A</b>	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
2	5-7-18	BAME	KRKE	MMR	B. ADDED P/N DP485E88TGWH; C, REMOVED M6 SCREWS	M09000HW
1	5/20/14	JSP	REFR	MMR	A. REVISED DRAWING TITLE BLOCK.	02479-245
R	3-4-06	LZ	CEF	CEF	RELEASED TO PRODUCTION	02479-245

D10100DA/14