

SUMMARY

Wires

Low voltage 8



Image is for illustrative purpose only

| | |
|------------------|------------------------------------|
| Series | 3B |
| Termination type | Female crimp |
| IP rating | 50 |
| AWG wire size | 20.00 - 18.00 |
| Cable Ø | 9.90 - 11.00 mm |
| Status | active |
| Matching parts | FGG.3B.308.CYCD11Z |

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | PH*: Free receptacle, cable collet and nut for fitting a bend relief |
| Keying | 1 key (alpha=0, plug: male contacts, receptacle: female contacts) |
| Housing Material | Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces |
| Variant | Z : Nut for fitting a bend relief |
| Weight | 57.60 g |

Performance

| | |
|---------------|----------------------------|
| Configuration | 3B.308 : 8 Low Voltage |
| Insulator | Y: PEEK for crimp contacts |
| Rated Current | 13 Amps |

Specifications

| |
|--|
| Contact Type: Crimp |
| Contact Retention: 40 N |
| Contact Dia.: 1.3 mm (0.051in) |
| Bucket Dia.: 1.4 mm (0.055in) |
| Min. Conductor: 0.5 mm ² (AWG 20) |
| Max. Conductor: 1 mm ² (AWG 18) |


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

R (max): 3.6 mOhm
 Vtest (contact-shell): 1750 V (AC), 2500 V (DC)
 Vtest (contact-contact): 1850 V (AC), 2600 V (DC)

Others

Endurance (Shell): 5000
 Temp (min / max): -55° C / +250° C
 Humidity (max): <=95% [at 60 deg C / 140 F]
 Vibration: 15 g [10 Hz - 2000 Hz]
 Shock Resistance: 100 g [6 ms]
 Climatical Category: 50/175/21
 Shielding (min): 75 dB (10 MHz)
 Shielding (min): 40 dB (1 GHz)
 Salt Spray Corrosion: >1000 hr

DRAWINGS

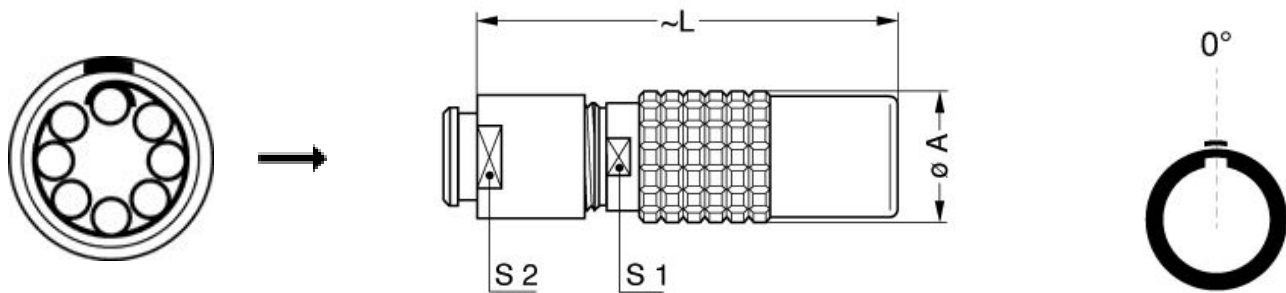

Dimensions

| | A | L | S1 | S2 |
|-----|------|------|------|------|
| mm. | 19 | 54.5 | 15 | 15 |
| in. | 0,75 | 2,15 | 0,59 | 0,59 |


RECOMMENDED BY LEMO

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Tools

| | |
|----------------------|----------------------------------|
| Crimp Tool: | DPC.91.701.V |
| Crimp settings: | AWG/Selector = 18-20-22/5-4-3 |
| Positionner: | DCE.91.133.BVM |
| Extractor: | DCC.13.15B.LAG |
| Replacement contact: | EGG.3B.665.ZZM |
| Spanner wrench: | DCD.3B.ZZZ.PA150 |

Cables

| | | | |
|--------|-----|------|--|
| 380750 | PVC | Grey |  |
|--------|-----|------|--|

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.