

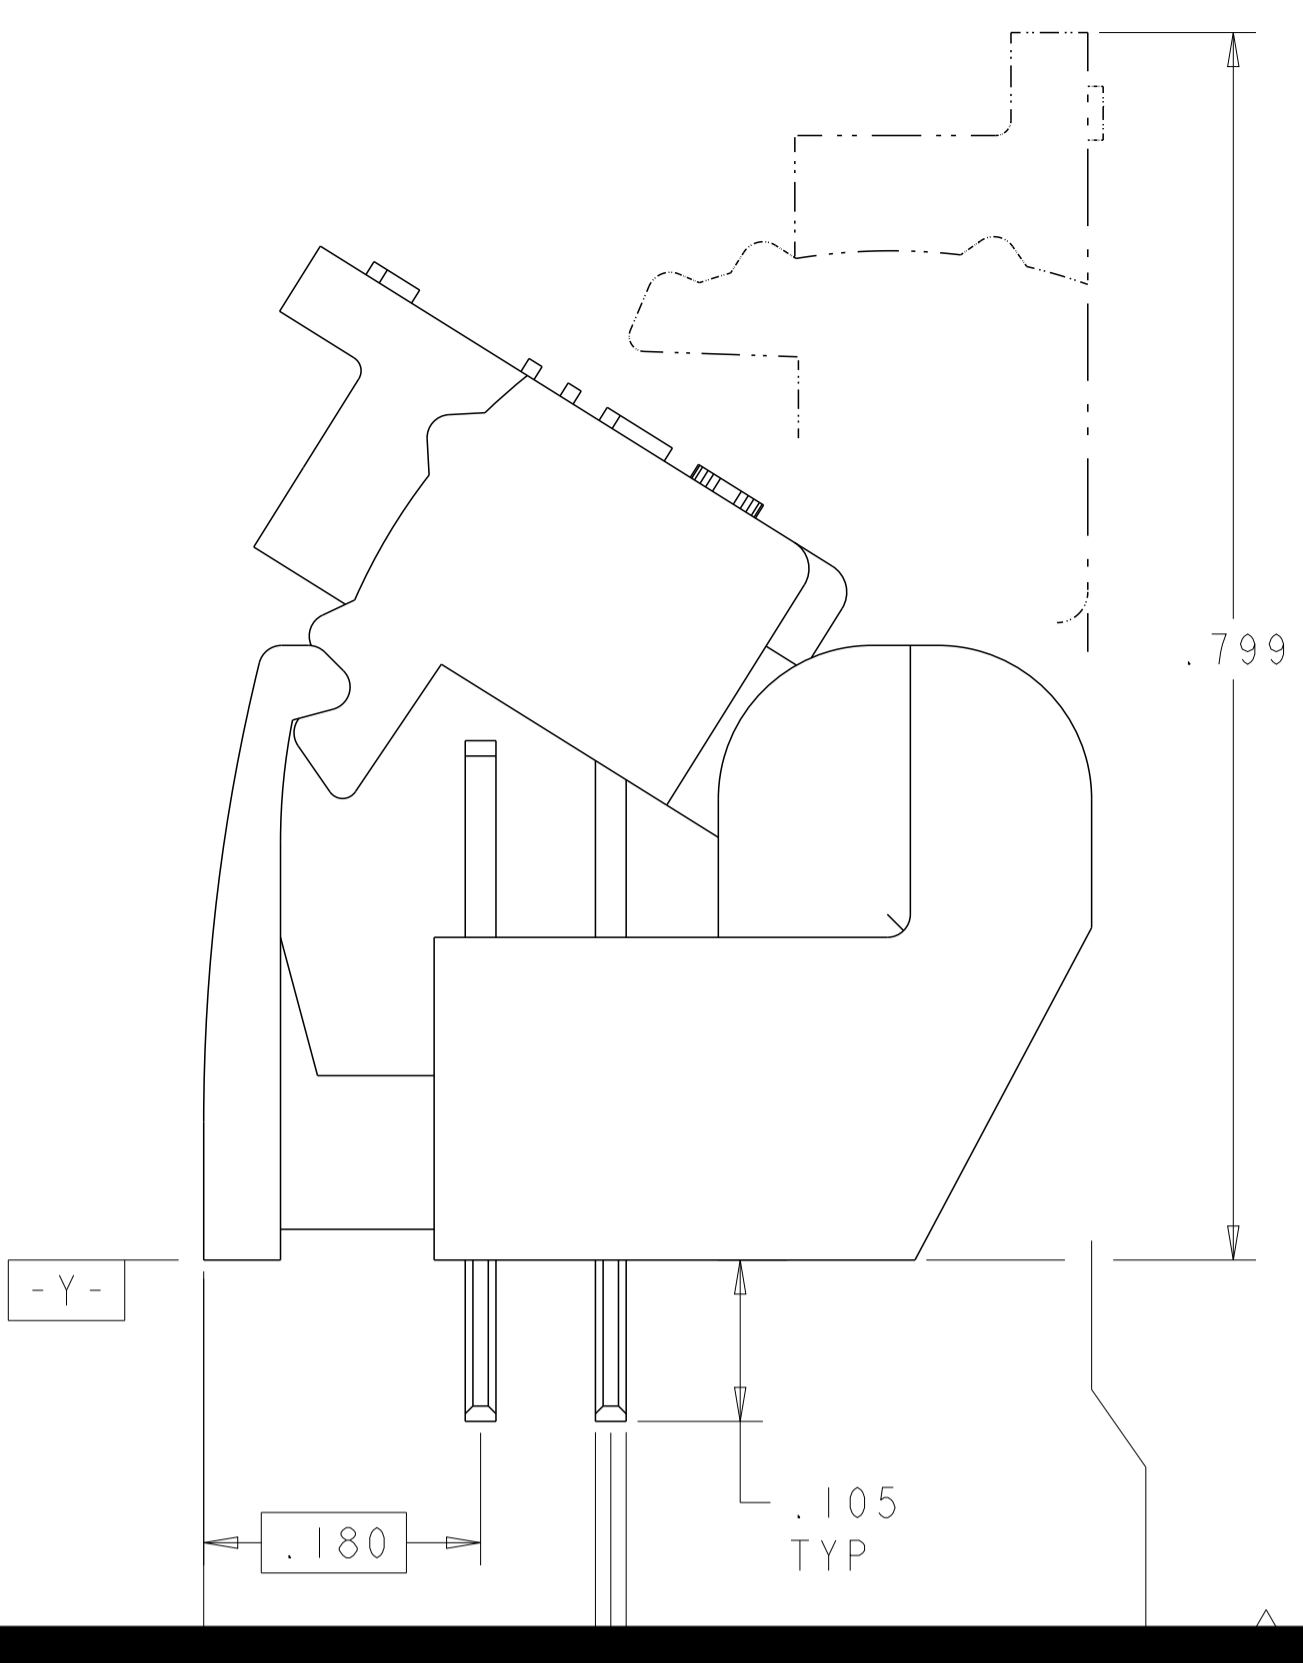
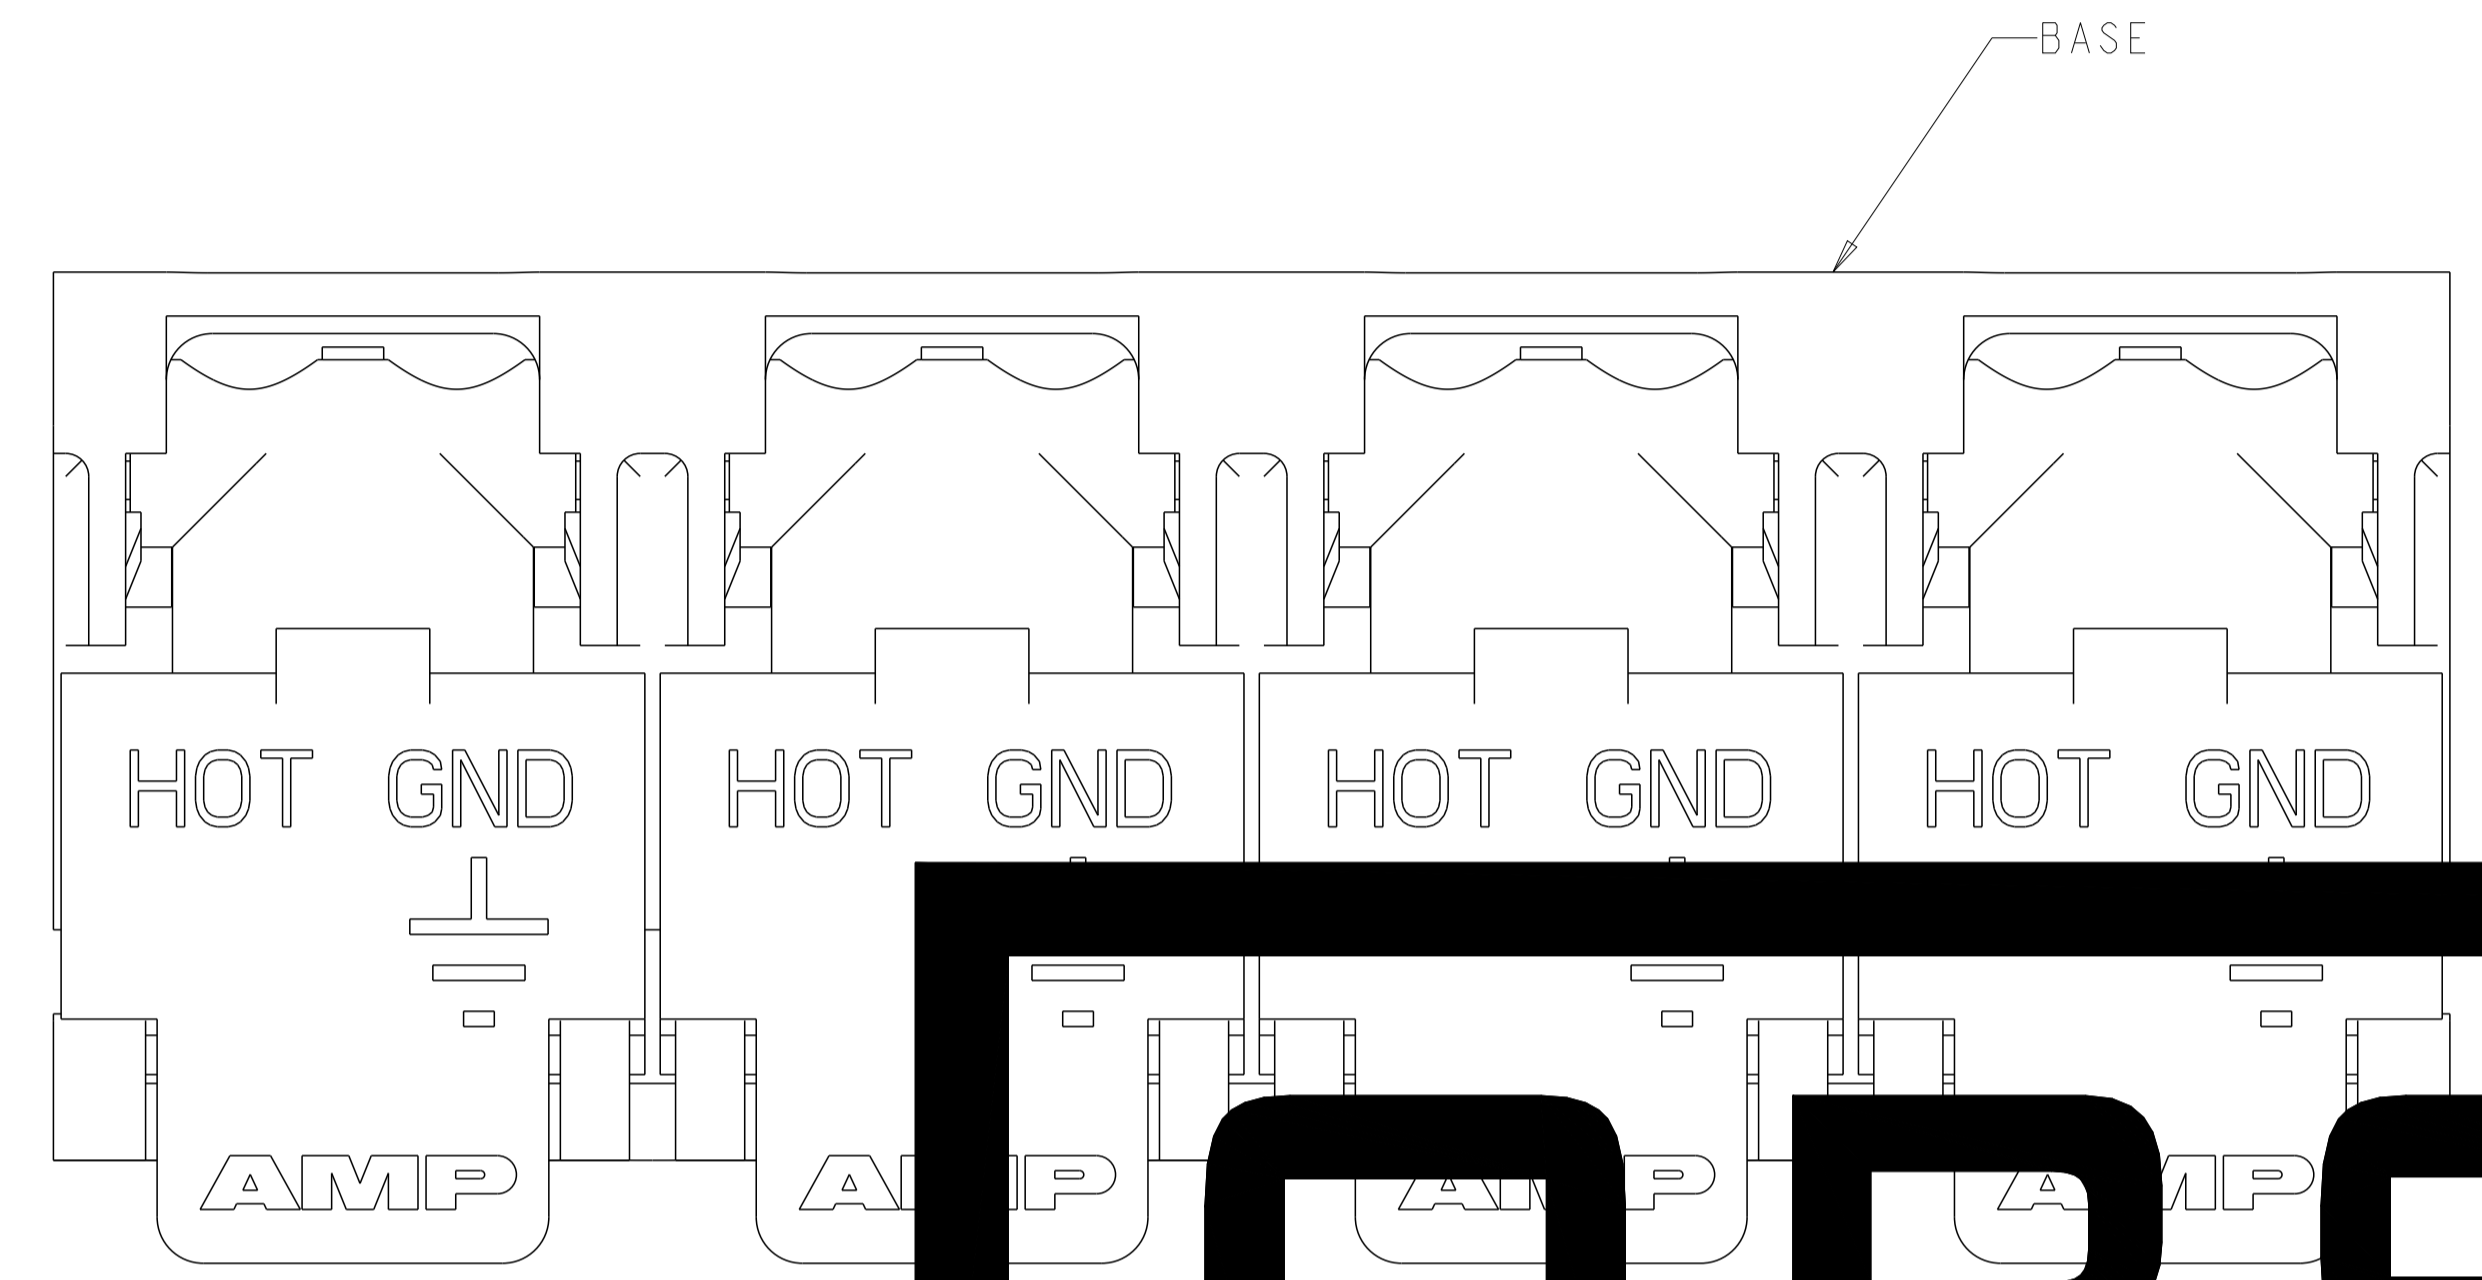


REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
D2		REVISED ECR-19-019743	02JUN2020	J. J. W. H.

- ⚠ MATERIAL: BASE - POLYESTER MOLDING COMPOUND, BLACK.
WIRE STUFFER: - POLYESTER MOLDING COMPOUND, BLACK.
TERMINAL - COPPER ALLOY, PLATED WITH 3.81μm MINIMUM THICK TIN OVER 1.27μm MINIMUM THICK NICKEL UNDERPLATE.
- ⚠ EACH WIRE ENTRY HOLE ACCEPTS ONE UNSTRIPPED SOLID COPPER 22-26 AWG WIRE WITH WIRE INSULATION DIAMETER RANGE FROM .060 THROUGH .040. OTHER WIRE SIZES AND TYPES SHALL BE SUBMITTED TO AMP ENGINEERS FOR APPLICATION APPROVAL.
- 3. SOLDER TABS PROVIDED FOR PERMANENT BOARD MOUNTING.
- ⚠ LOCATION OF HOLE PATTERN DETERMINED BASED ON CUSTOMER REQUIREMENTS.

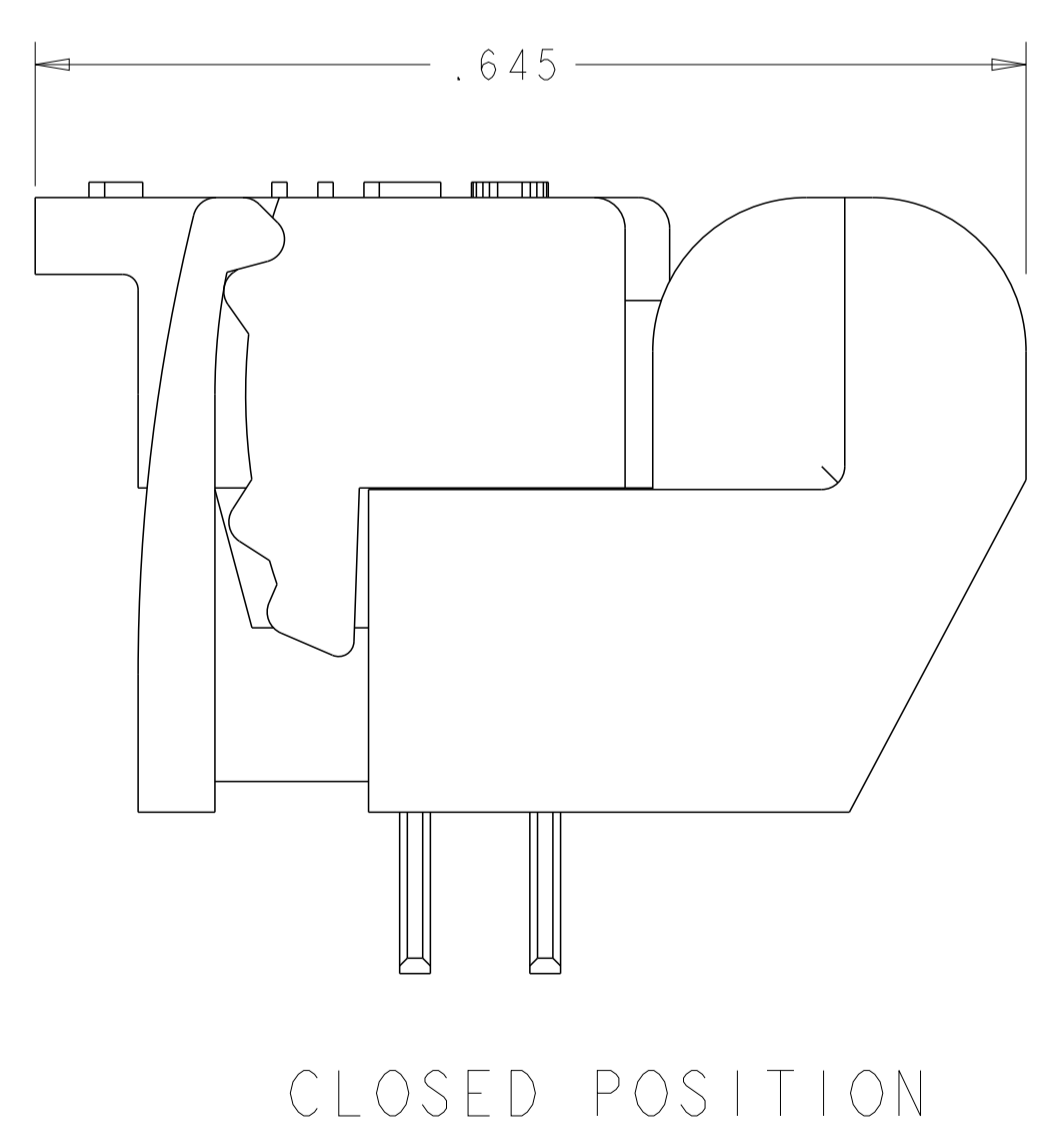

OBSOLETE

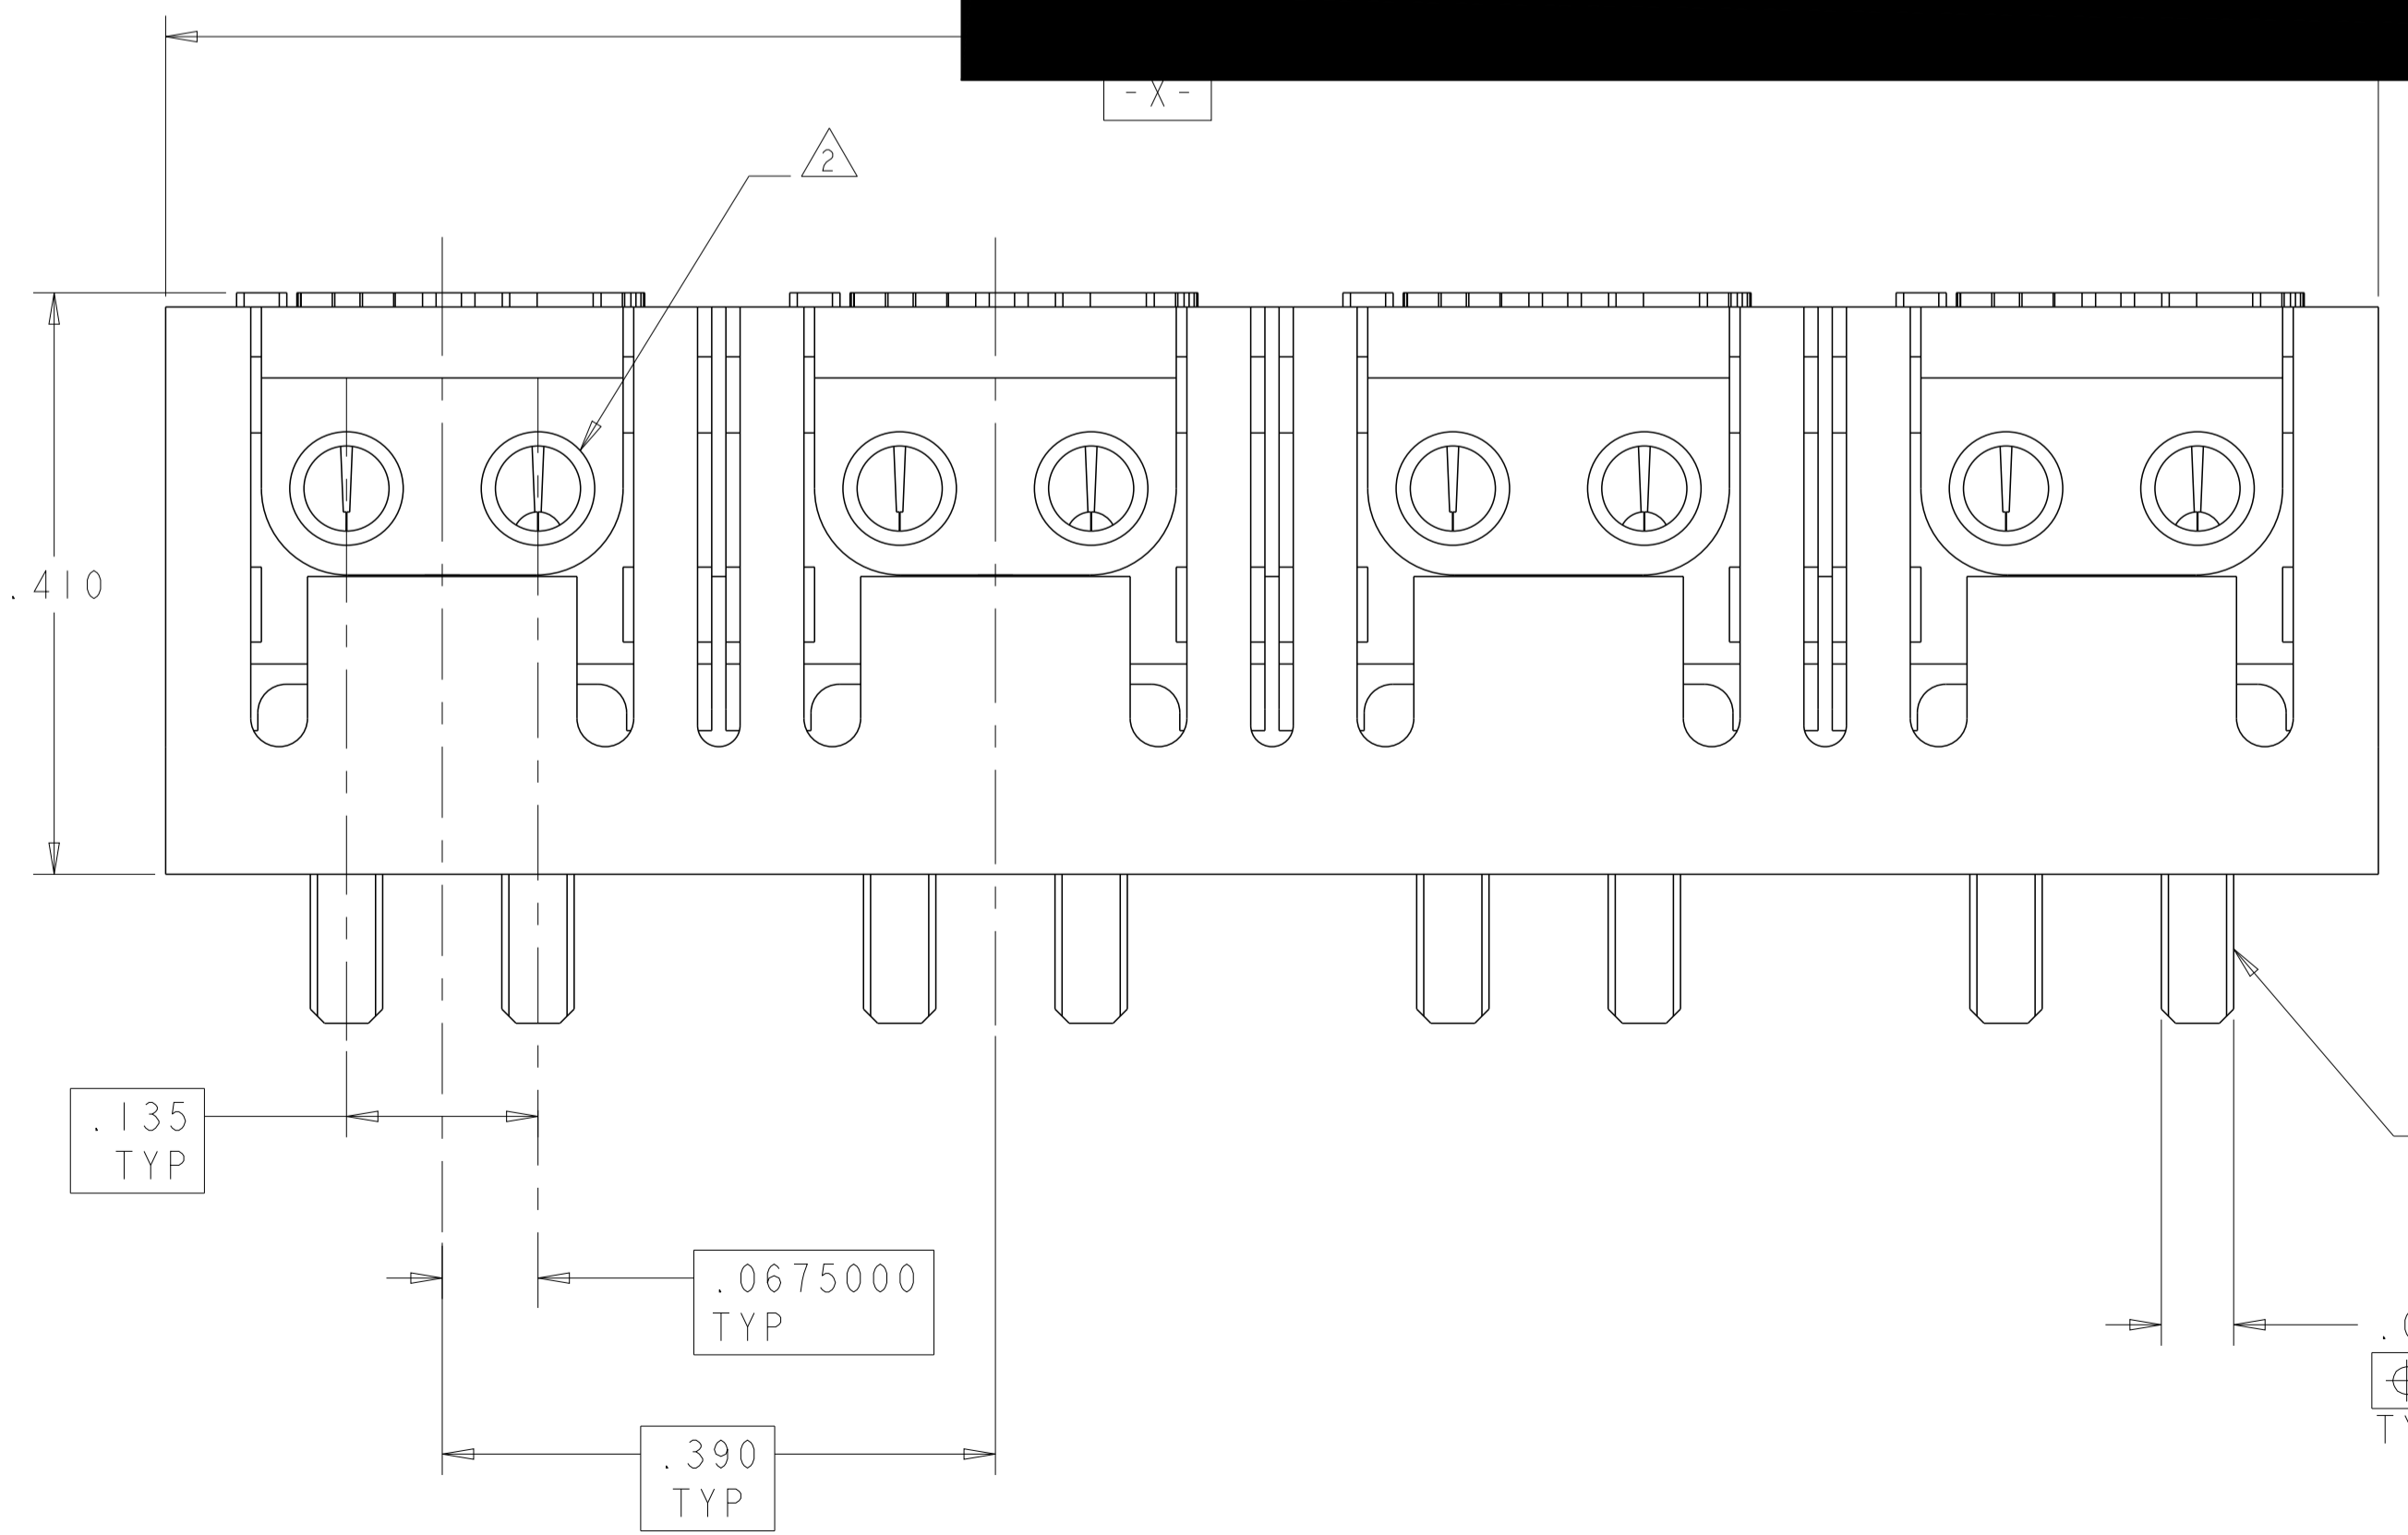

TERMINAL
 .051 REF
 .008 TYP

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. ZARBOCK 28APR00	28APR00		NAME ASSEMBLY, FOUR PAIR, DOUBLE ENTRY, PIVOT II CONNECTOR
DIMENSIONS: INCHES		CHK M. DERSTINE 28APR00	28APR00		
DIMENSIONS: 0 PLC ± 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ± ANGLES ±2° FINISH		TOLERANCES UNLESS OTHERWISE SPECIFIED: PRODUCT SPEC APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A 100779 C=1339312	
MATERIAL		WEIGHT		RESTRICTED TO	
CUSTOMER DRAWING		SCALE 8:1		SHEET 1 OF 1 REV D2	

1339312-1
 PART NUMBER