

PA	P2RFC-2336-XX			
RE	DESCRIPTION	DWN	DATE	APPROVED
F	ENGINEERING RELEASE	CZS	01/17/17	JDMc

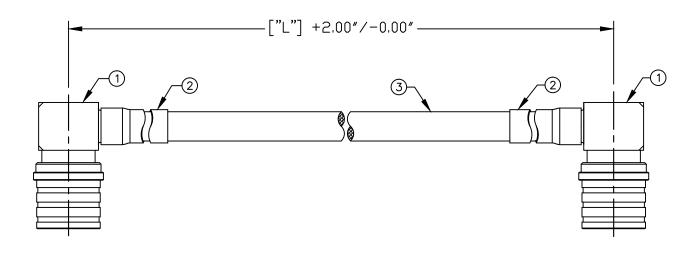



SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-6 GHz

3RD ORDER IM: ≤-155 dBc @ 700MHz & 1900MHz 3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS

VSWR: ≤1.2:1 THRU 3GHz

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

L						J ~
I	3	TFT-402-LF	1	PLENUM CABLE		C
I	2	TUBING	2	HEAT SHRINK	-	CI
I	1	RQA-5010-SR2LP	2	QMA MALE R/A CONNECTOR	WHITE BRONZE	OF
I	#	PART NUMBER	QTY	DESCRIPTION	FINISH	С

CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

DRAWN	01/17/17	1
C. ZUNIGA	01/17/17	l
CHECKED		l
ORJ DRAWN C. ZUNIGA	01/17/17	

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

SAN DIEGO, CA 92126 (858) 549–6340 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

7610 MIRAMAR RD.

QMA MALE RIGHT ANGLE TO QMA MALE RIGHT ANGLE

13	SIZE	CABLE	GROUP	P2RFC-2336-XX				REV	REV	
	SCALE	NTS	ENGINEE	RING ID:	000000	SHEET	1	OF	1	