### XPSMCMCO0000COG

# CANopen diagnostic expansion , Modicon MCM, spring term





#### Main

Main	
Range of Product	Modicon MCM
Product or Component Type	Non-safe communication module
Device short name	XPSMCM
[Us] rated supply voltage	24 V - 2020 % DC

### Complementary

Power dissipation in W	3 W	
Quality labels	CE	
Range Compatibility	Preventa XPSMCM	
Connector type	Male SUB-D 9	
Number of port	1	
Method of access	Server	
Transmission rate	10 kbit/s 20 kbit/s 50 kbit/s 100 kbit/s 125 kbit/s 250 kbit/s 250 kbit/s 500 kbit/s 800 kbit/s 4 Mbit/s Autodetected	
Communication port protocol	CANopen	
Current Consumption	0.125 mA	
Maximum cable distance between devices	8202.10 Ft (2500 m) 3280.84 Ft (1000 m) 2460.63 Ft (750 m) 1640.42 Ft (500 m) 820.21 Ft (250 m) 328.08 Ft (100 m) 164.04 Ft (50 m) 82.02 ft (25 m)	
Local signalling	LED green PWR power ON LED green RUN operating LED red E IN internal error LED red E EX external error LED green/red OP operating LED green/red ERR communication error	
Connections - terminals	2 spring clamp terminals, removable terminal block	
Cable cross section	0.000.00 ln² (0.22.5 mm²) - AWG 24AWG 14 flexible without cable end 0.000.00 ln² (0.252.5 mm²) - AWG 23AWG 14 flexible with cable end, with bezel 0.000.00 ln² (0.252.5 mm²) - AWG 23AWG 14 flexible with cable end, without bezel 0.000.00 ln² (0.22.5 mm²) - AWG 24AWG 14 solid without cable end 0.000.00 in² (0.51 mm²) - AWG 20AWG 18 flexible with cable end, with	
	double bezel	

Width	0.89 in (22.5 mm)
Height	3.90 in (99 mm)
Depth	4.51 in (114.5 mm)
Net Weight	0.66 lb(US) (0.3 kg)

### Environment

CULus	
RCM	
TÜV	
IP20	
14131 °F (-1055 °C)	
-4185 °F (-2085 °C)	
1095 %	
2	
250 V AC between power supply and housing EN/IEC 61800-5-1	
II	
Electrostatic discharge immunity test 6 kV on contact) EN/IEC 61000-4-2 Electrostatic discharge immunity test 20 kV on air) EN/IEC 61000-4-2 Susceptibility to electromagnetic fields 10 V/m 801000 MHz) EN/IEC 61000-4-3 Susceptibility to electromagnetic fields 30 V/m 1.4 GHz2 GHz) EN/IEC 61000-4-3	
+/-0.35 mm 1055 Hz)EN/IEC 61496-1	
10 gn 16 ms) 1000 shocks on each axis EN/IEC 61496-1	
6561.68 ft (2000 m)	
20 year(s)	

### Ordering and shipping details

ordoning and ompping dotailo	
Category	22477-SAFETY MODULES (PREVENTA)
Discount Schedule	SAF2
GTIN	3606480748332
Nbr. of units in pkg.	1
Package weight(Lbs)	7.48 oz (212.0 g)
Returnability	No
Country of origin	IT

### **Packing Units**

i doking office	
Unit Type of Package 1	PCE
Package 1 Height	1.77 in (4.5 cm)
Package 1 width	5.04 in (12.8 cm)
Package 1 Length	6.38 in (16.2 cm)
Unit Type of Package 2	S01
Number of Units in Package 2	6
Package 2 Weight	3.32 lb(US) (1.507 kg)
Package 2 Height	5.91 in (15.0 cm)
Package 2 width	5.91 in (15.0 cm)
Package 2 Length	15.75 in (40.0 cm)

### Offer Sustainability

Sustainable offer status	Green Premium product	
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	
REACh Regulation	☑ REACh Declaration	
REACh free of SVHC	Yes	
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS  Declaration	


Mercury free	Yes	
RoHS exemption information	₫Yes	
China RoHS Regulation	China RoHS Declaration	
Environmental Disclosure	Product Environmental Profile	
Circularity Profile	<sup>™</sup> End Of Life Information	
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.	
PVC free	Yes	

# Product data sheet Dimensions Drawings

## XPSMCMCO0000COG

### **Dimensions**


### Spring Terminal

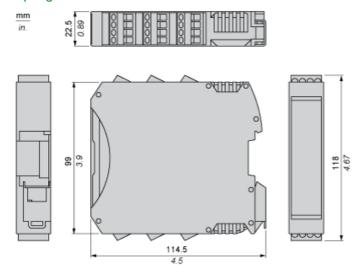


### XPSMCMCO0000COG

### Mounting Safety Controller CPU with Module(s)

### Mount BackPlane Connector on Rail








- 1: Connect as much Backplane Connector as module to be install.
- 2: Fix the connectors to the rail (Top first).

### Mount Safety Controller CPU with Other Module(s)

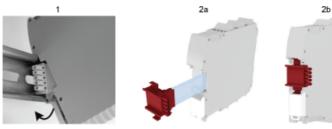

- 1: Mount controller CPU and modules on rail.
- 2: Make sure that the controller CPU or the module(s) are plugged on the BackPlane connector.

### XPSMCMCO0000COG

#### Connection & Schema


### **CANOpen Connector**



Description	CAN (CANOpen) standard communication device	
Wiring	Pin/ Signal	
	1/ not connected	
	2/ CAN_L	
	3/ CAN_GND	
	4/ not connected	
	5/ CAN_SHLD	
	6/ not connected	
	7/ CAN_H	
	8/ not connected	
	9/ not connected	
	Housing CAN_SHIELD	
Data sets	input status, input diagnostics,	
	fieldbus input status, probe status,	
	safety output status, safety output diagnostics	

### Wiring

### **Terminal Designation**



Terminal	Signal	Description
1	24 VDC	24 Vdc power supply
2	_	Not connected
3		
4	0 VDC	0 Vdc power supply
5	_	Not connected

Terminal	Signal	Description
6		
7		
8		

### Wiring Example

