

WT14-2P111

W14

SMALL PHOTOELECTRIC SENSORS

**SICK**  
Sensor Intelligence.



### Ordering information

| Type       | Part no. |
|------------|----------|
| WT14-2P111 | 1026058  |

Other models and accessories → [www.sick.com/W14](http://www.sick.com/W14)

Illustration may differ



### Detailed technical data

#### Features

|  |                                   |
|--|-----------------------------------|
| <b>Functional principle</b>            | Photoelectric proximity sensor    |
| <b>Functional principle detail</b>     | Energetic                         |
| <b>Dimensions (W x H x D)</b>          | 17.6 mm x 75.5 mm x 33.5 mm       |
| <b>Housing design (light emission)</b> | Rectangular                       |
| <b>Sensing range max.</b>              | 50 mm ... 1,500 mm <sup>1)</sup>  |
| <b>Sensing range</b>                   | 300 mm ... 1,500 mm <sup>1)</sup> |
| <b>Type of light</b>                   | Infrared light                    |
| <b>Light source</b>                    | LED <sup>2)</sup>                 |
| <b>Light spot size (distance)</b>      | Ø 56 mm (1,000 mm)                |
| <b>Wave length</b>                     | 870 nm                            |
| <b>Adjustment</b>                      | Single teach-in button            |

<sup>1)</sup> Object with 90% remission (based on standard white, DIN 5033).

<sup>2)</sup> Average service life: 100,000 h at T<sub>J</sub> = +25 °C.

#### Mechanics/electronics

|                       |                                   |
|-----------------------|-----------------------------------|
| <b>Supply voltage</b> | 10 V DC ... 30 V DC <sup>1)</sup> |
| <b>Ripple</b>         | < 5 V <sub>pp</sub> <sup>2)</sup> |

<sup>1)</sup> Limit values when operated in short-circuit protected network: max. 8 A.

<sup>2)</sup> May not exceed or fall below U<sub>V</sub> tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> Signal transit time with resistive load.

<sup>5)</sup> With light/dark ratio 1:1.

<sup>6)</sup> Do not bend below 0 °C.

<sup>7)</sup> A = V<sub>S</sub> connections reverse-polarity protected.

<sup>8)</sup> C = interference suppression.

<sup>9)</sup> D = outputs overcurrent and short-circuit protected.

|  |   |
|--|---|
| <b>Current consumption</b>             | 55 mA <sup>3)</sup>                                   |
| <b>Switching output</b>                | PNP   |
| <b>Output function</b>                 | Complementary   |
| <b>Switching mode</b>                  | Light/dark switching                                  |
| <b>Output current I<sub>max.</sub></b> | ≤ 100 mA  |
| <b>Response time</b>                   | ≤ 2.5 ms <sup>4)</sup>                                |
| <b>Switching frequency</b>             | 200 Hz <sup>5)</sup>                                  |
| <b>Connection type</b>                 | Cable, 4-wire, 2 m <sup>6)</sup>                      |
| <b>Cable material</b>                  | PVC   |
| <b>Circuit protection</b>              | A <sup>7)</sup><br>C <sup>8)</sup><br>D <sup>9)</sup> |
| <b>Weight</b>                          | 120 g   |
| <b>Housing material</b>                | Plastic, ABS  |
| <b>Optics material</b>                 | Plastic, PMMA   |
| <b>Enclosure rating</b>                | IP67  |
| <b>Ambient operating temperature</b>   | -25 °C ... +60 °C                                     |
| <b>Ambient temperature, storage</b>    | -40 °C ... +70 °C                                     |
| <b>UL File No.</b>                     | NRKH.E181493 & NRKH7.E181493                          |

1) Limit values when operated in short-circuit protected network: max. 8 A.

2) May not exceed or fall below U<sub>v</sub> tolerances.

3) Without load.

4) Signal transit time with resistive load.

5) With light/dark ratio 1:1.

6) Do not bend below 0 °C.

7) A = V<sub>S</sub> connections reverse-polarity protected.

8) C = interference suppression.

9) D = outputs overcurrent and short-circuit protected.

### Safety-related parameters


|                         |             |
|-------------------------|-------------|
| <b>MTTF<sub>D</sub></b> | 1,236 years |
| <b>DC<sub>avg</sub></b> | 0 %         |

### Classifications

|                     |          |
|---------------------|----------|
| <b>eCl@ss 5.0</b>   | 27270903 |
| <b>eCl@ss 5.1.4</b> | 27270903 |
| <b>eCl@ss 6.0</b>   | 27270903 |
| <b>eCl@ss 6.2</b>   | 27270903 |
| <b>eCl@ss 7.0</b>   | 27270903 |
| <b>eCl@ss 8.0</b>   | 27270903 |
| <b>eCl@ss 8.1</b>   | 27270903 |
| <b>eCl@ss 9.0</b>   | 27270903 |
| <b>eCl@ss 10.0</b>  | 27270904 |
| <b>eCl@ss 11.0</b>  | 27270904 |
| <b>eCl@ss 12.0</b>  | 27270903 |


|                       |          |
|-----------------------|----------|
| <b>ETIM 5.0</b>       | EC001821 |
| <b>ETIM 6.0</b>       | EC001821 |
| <b>ETIM 7.0</b>       | EC002719 |
| <b>ETIM 8.0</b>       | EC002719 |
| <b>UNSPSC 16.0901</b> | 39121528 |

### Connection type




### Connection diagram

Cd-094



### Characteristic curve


WT14-2, infrared light, 1500 mm

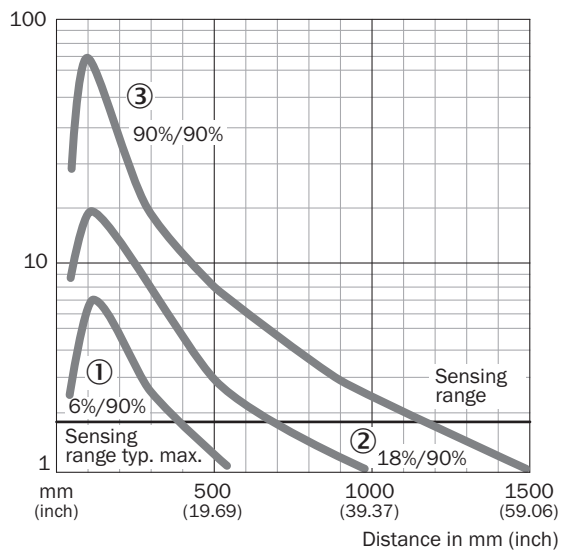

- ① Sensing range on black, 6% remission
- ② Sensing range on gray, 18 % remission
- ③ Sensing range on white, 90% remission

## Sensing range diagram

WT14-2, infrared light, 1500 mm

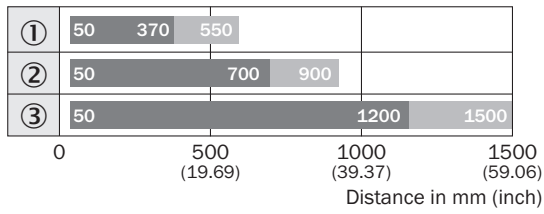


■ Sensing range                      ■ Sensing range typ. max.

- ① Sensing range on black, 6% remission
- ② Sensing range on gray, 18 % remission
- ③ Sensing range on white, 90% remission

## Adjustments


Teach-in button

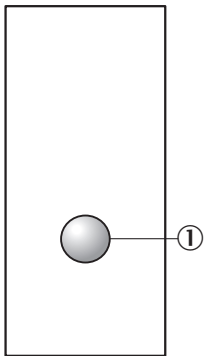

① Teach-in button

### Dimensional drawing (Dimensions in mm (inch))


WT14-2, single teach-in button

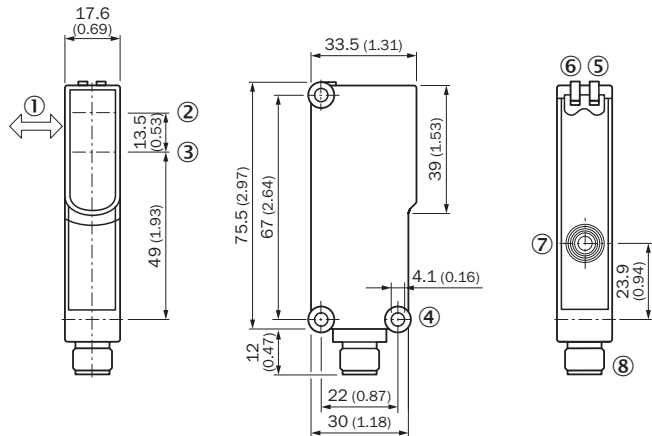

- ① Standard direction of the material being detected
- ② Center of optical axis, sender
- ③ Center of optical axis, receiver
- ④ Mounting hole  $\varnothing$  4.1 mm
- ⑤ LED indicator yellow: Status of received light beam
- ⑥ LED indicator green: Supply voltage active
- ⑦ Teach-in button
- ⑧ M12 male connector, 4-pin or 2 m cable

### Recommended accessories

Other models and accessories → [www.sick.com/W14](http://www.sick.com/W14)

|   | Brief description   | Type       | Part no. |
|---|---|------------|----------|
| Plug connectors and cables  |   |            |          |
|  | Head A: male connector, M12, 4-pin, straight<br>Cable: unshielded | STE-1204-G | 6009932  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)