


DETAIL "A"
CHAMFER
SCALE=15:1

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	110 Ω	260 Ω	520 Ω
Minimum	- Ω	208 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

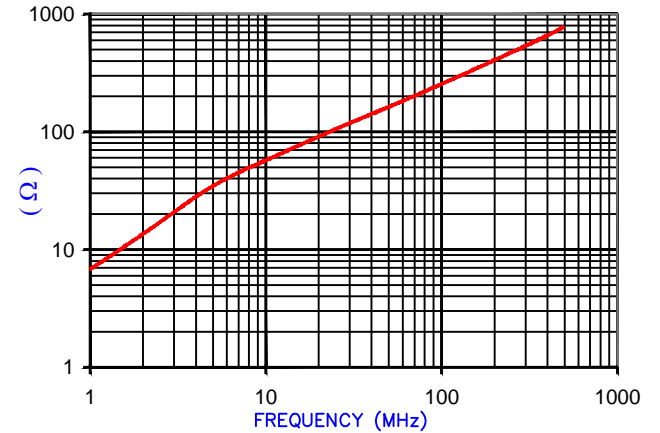

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture, REF# 3420


FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	32.00 [1.260]	± 0.64 [0.025]
B	26.00 [1.024]	± 0.45 [0.018]
C	30.00 [1.181]	± 0.76 [0.030]
D	7.00 [0.276]	± 0.46 [0.018]
E	1.00 [0.039]	+ 0.50 [0.020] - 0.30 [0.012]

WEIGHT/1000 29.17 kgs [64.30 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

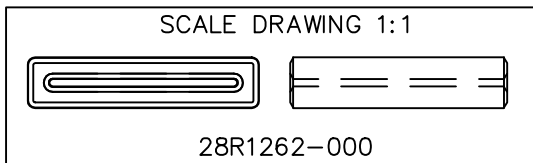

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
PROJECT/PART NUMBER:				28R1262-000		REV	DRAWN BY:
C	UPDATE COMPANY LOGO	06/19/15	QIU			C	JRK
B	UPDATE Z SPEC AND COMPANY LOGO	07/27/07	JRK	DATE:	07/01/04	SCALE:	2 : 1
A	ORIGINAL DRAFT	07/01/04	JRK	CAD #	28R1262-000-C	TOOL #	R1262
REV	DESCRIPTION	DATE	INT			MATERIAL: FERRITE	