
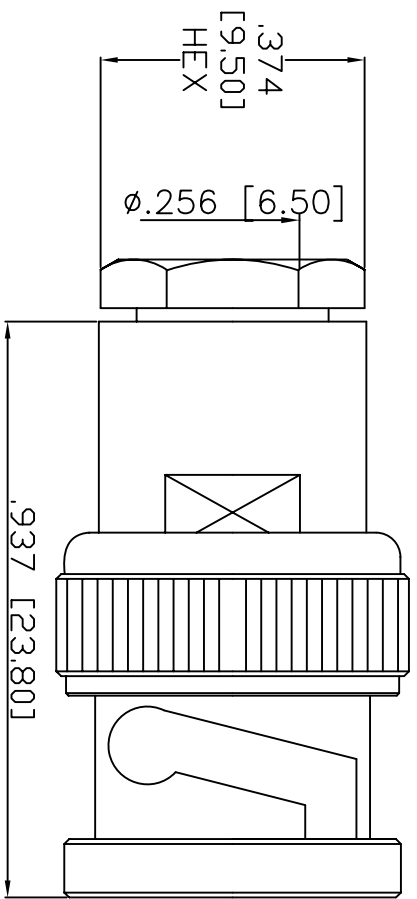


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/01/08	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

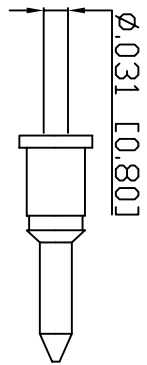

NO	DESCRIPTION	MATERIAL	FINISH	QTY
12	NUT	ZINC	NICKEL	1
11	WASHER	BRASS	NICKEL	1
10	RUBBER WASHER	RUBBER	RED	1
9	WASHER	BRASS	NICKEL	1
8	CENTER CONTACT	BRASS	GOLD	1
7	BODY	ZINC	NICKEL	1
6	WASHER	FE	NICKEL	1
5	SPRING	65MN		1
4	DUT CONTACT	ZINC ALLOY	NICKEL	1
3	RUBBER WASHER	PVC	RED	1
2	SHELL	ZINC	NICKEL	1
1	INSULATOR	ABS		1

**SPECIFICATIONS:**

**Electrical:**

Nominal Impedance: 75 ohms  
 Frequency range: 0-4 GHz  
 Maximum peak voltage: 500V  
 Insulation resistance: 5000 Mohm min @ 500 VDC  
 Dielectric withstanding voltage: 1500 VAC rms  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES  
 .X ±.10 Ø.X  
 .XX ±.020 Ø.XX  
 .XXX ±.015 Ø.XXX

APPROVALS	DATE
DRAWN DY	7/01/08

CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BNC MALE CLAMP RG59U, 75 OHM

SIZE	PART NO.	REV.
X	RF1-50-D-04-75	
REF:	SCALE: NTS	SHEET 1 OF 1